

HTE# 10-5-2677

Harnett County Department of Public Health

Improvement Permit

26481

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: VICENTE GALLARDO PROPERTY LOCATION: DANA LN
NEW ☒ REPAIR ☐ EXPANSION ☐ SUBDIVISION K BAR HILLS LOT 25 LOT # 25
Type of Structure: MAN. HOME (28'x42') Site Improvements required prior to Construction Authorization Issuance:
Proposed Wastewater System Type: PUMP TO 25% REOUECTION SYSTEM
Projected Daily Flow: 360 GPD
Number of bedrooms: 3 Number of Occupants: 6 max
Basement ☐ Yes ☒ No
Pump Required: ☒ Yes ☐ No ☐ May be required based on final location and elevations of facilities
Type of Water Supply: ☐ Community ☒ Public ☐ Well Distance from well 100 feet Permit valid for: ☒ Five years
Permit conditions: ☐ No expiration

Authorized State Agent: [Signature] RENS Date: 3/10/11 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: VICENTE GALLARDO PROPERTY LOCATION: DANA LN
SUBDIVISION K BAR HILLS LOT # 25
Facility Type: MAN HOME (28'x42') ☒ New ☐ Expansion ☐ Repair
Basement? ☐ Yes ☒ No Basement Fixtures? ☐ Yes ☒ No
Type of Wastewater System** PUMP TO 25% REOUECTION SYSTEM (Initial) Wastewater Flow: 360 GPD
(See note below, if applicable ☐ PUMP TO 25% RED. SYSTEM (Repair))

Installation Requirements/Conditions

Septic Tank Size 1000 gallonsPump Tank Size 1000 gallonsNumber of trenches 2Exact length of each trench 90 feet

Trenches shall be installed on contour at a

Maximum Trench Depth of: 18 inches

(Trench bottoms shall be level to +/-1/4"

in all directions)

Trench Spacing: 9 Feet on CenterSoil Cover: 6 inches(Maximum soil cover shall not exceed
36" above the trench bottom)

Pump Requirements: _____ ft. TDH vs. _____ GPM

Aggregate Depth: _____ inches below pipe

_____ inches above pipe

_____ inches total

Conditions: THIS PERMIT BASED ON A PROPOSAL FROM A LSS.
SEE NOTES ON SITE SKETCH

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] RENS Date: 3/10/11
Construction Authorization Expiration Date: 3/10/16

HTE# 10-5-25677


Permit # 26481

Harnett County Department of Public Health Site Sketch

ISSUED TO: VICENTE GALLARDO PROPERTY LOCATOR: DANA LN
SUBDIVISION K BAR HILL LOT # 25

Authorized State Agent: ~~REMS (OLIVER TOLKSDORF)~~ Date: 3/10/11

- USE 90' OF BLUE LINE &
90' OF RED LINE
- IF TANK SIPHONS A
SIPHON BREAK VALVE
MUST BE INSTALLED
- TANKS MAY BE SET
ANYWHERE AROUND THE
HOUSE

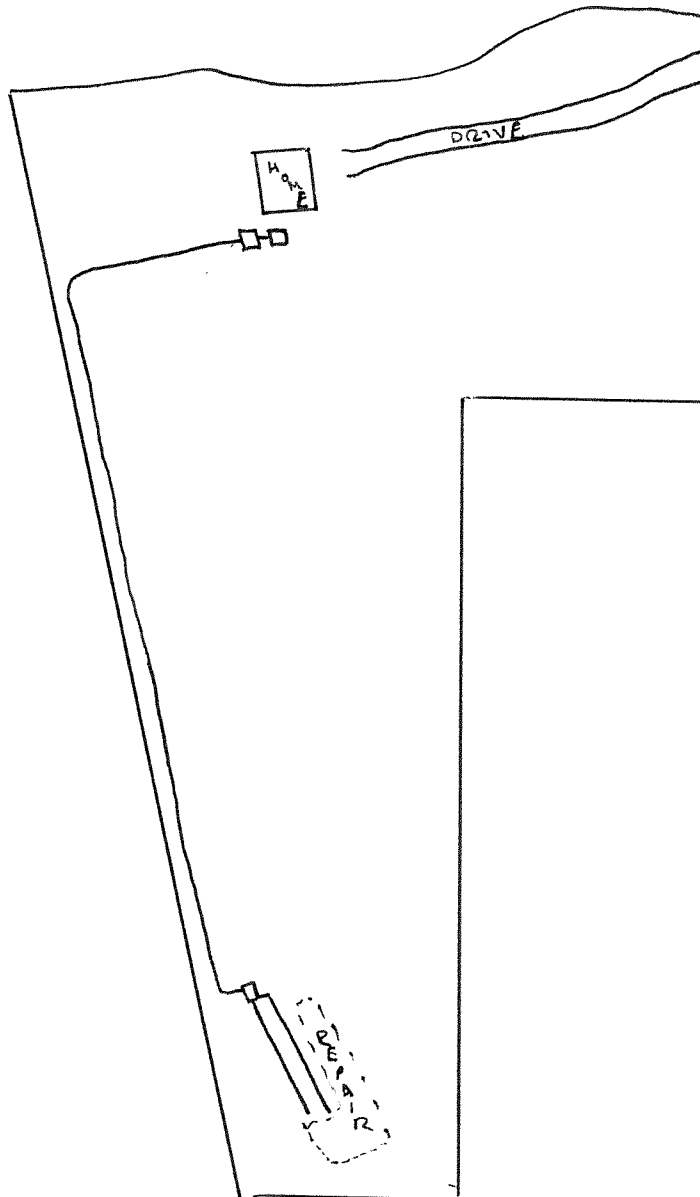

DRAWING
NTS