

HTE# 1253132

# Harvest County Department of Public Health

28013

14-5-34132R  
08/14/14 by [Signature]

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

PROPERTY LOCATION: LEE COUNTY LINE RD

ISSUED TO: JESUS COLON SANTIAGO

SUBDIVISION \_\_\_\_\_ LOT # 1

NEW  REPAIR  EXPANSION   
Type of Structure: MAN HOME (14x80')

Site Improvements required prior to Construction Authorization Issuance:

Proposed Wastewater System Type: 25% REDUCTION SYSTEM

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: 6 max

Basement  Yes  No

Pump Required:  Yes  No  May be required based on final location and elevations of facilities

Type of Water Supply:  Community  Public  Well Distance from well 100 feet

Permit valid for:  Five years  
 No expiration

Permit conditions: \_\_\_\_\_

Authorized State Agent: \_\_\_\_\_

REGNS

Date: 7/28/14 08/14/14

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: JESUS COLON SANTIAGO

PROPERTY LOCATION: LEE COUNTY LINE RD

SUBDIVISION \_\_\_\_\_ LOT # 1

Facility Type: MAN HOME (14x80')  New  Expansion  Repair

Basement?  Yes  No Basement Fixtures?  Yes  No

Type of Wastewater System\*\* 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 360 GPD

(See note below, if applicable )

25% REDUCTION SYSTEM (Repair)

### Installation Requirements/Conditions

Septic Tank Size 1000 gallons

Pump Tank Size \_\_\_\_\_ gallons

Number of trenches 4

Exact length of each trench 60 feet

Trenches shall be installed on contour at a

Maximum Trench Depth of: 18-24 inches

(Trench bottoms shall be level to +/-1/4"

in all directions)

Trench Spacing: 9 Feet on Center

Soil Cover: 6-12 inches

(Maximum soil cover shall not exceed

36" above the trench bottom)

Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM

Aggregate Depth: \_\_\_\_\_ inches below pipe

Aggregate Depth: \_\_\_\_\_ inches above pipe

Aggregate Depth: \_\_\_\_\_ inches total

Conditions: \_\_\_\_\_

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.  
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: \_\_\_\_\_

REGNS

Date: 7/28/14 08/14/14

Construction Authorization Expiration Date: 7/28/19 08/14/19



NOTE!  
 ORIGINAL SUBDIVISION MAP  
 PC.F/193-B  
 REVISION MAP #2006/204.  
 CHANGED THE LOT LINES.  
 THIS RECOMBINATION MAP  
 IS FOR THE PURPOSE OF  
 CHANGING THE LOT LINES  
 BACK TO THE ORIGINAL  
 SUBDIVISION MAP.

...ING PARCELS OF LAND  
 DATE 8-13-14  
 L-2607  
 PLZ  
 EAKES


N/F  
 TAYLOR  
 2620/588  
 MAP# 98/339

NO

Change

Added Property

SITE PLAN APPROVAL  
 DISTRICT RADER USE Street  
 #BEDROOMS 3  
 Date 8-14-14  
 Zoning Administrator

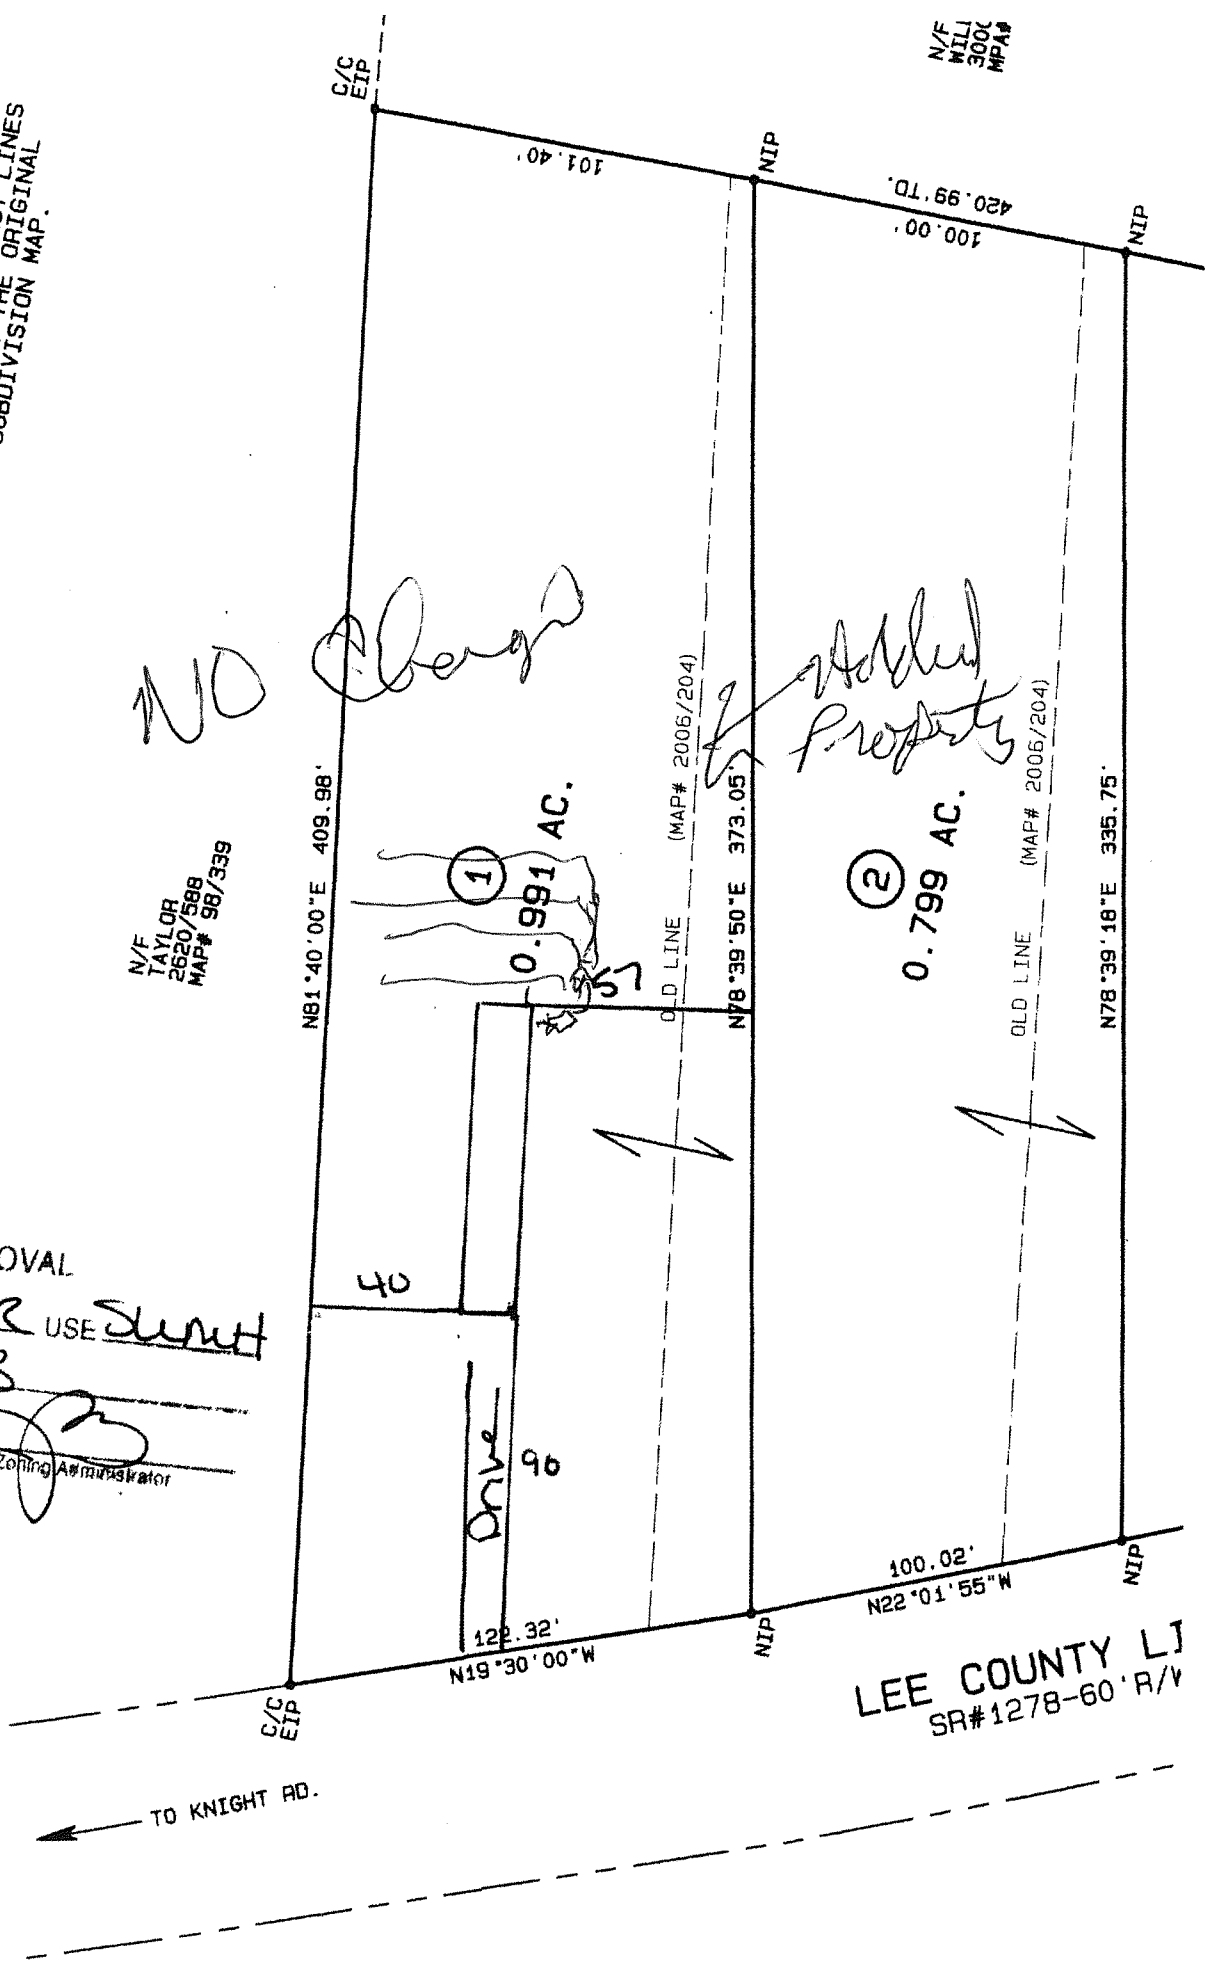

LEE COUNTY LJ  
 SR#1278-60' R/V