

HTE# 16-5-38286

# Harnett County Department of Public Health

28773

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

PROPERTY LOCATION: JOE COLLINS RD

ISSUED TO: CHARLES GENTLEY JR SUBDIVISION \_\_\_\_\_ LOT # \_\_\_\_\_

NEW  REPAIR  EXPANSION  Site Improvements required prior to Construction Authorization Issuance: \_\_\_\_\_

Type of Structure: MAN HOME (25x55) + SHOP

Proposed Wastewater System Type: 25% REDUCTION SYSTEM

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: C max

Basement  Yes  No

Pump Required:  Yes  No  May be required based on final location and elevations of facilities

Type of Water Supply:  Community  Public  Well Distance from well 100 feet

Permit valid for:  Five years  No expiration

Permit conditions: \_\_\_\_\_

Authorized State Agent: [Signature] Date: 3/28/16 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: CHARLES GENTLEY JR PROPERTY LOCATION: JOE COLLINS RD

SUBDIVISION \_\_\_\_\_ LOT # \_\_\_\_\_

Facility Type: MAN HOME (25x55) + SHOP  New  Expansion  Repair

Basement?  Yes  No Basement Fixtures?  Yes  No

Type of Wastewater System\*\* 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 360 GPD

(See note below, if applicable )

Pump To 25% Red. (Repair)

### Installation Requirements/Conditions

Septic Tank Size 1000 gallons Number of trenches 1

Pump Tank Size \_\_\_\_\_ gallons Exact length of each trench 300 feet Trench Spacing: 9 Feet on Center

Trenches shall be installed on contour at a Maximum Trench Depth of: 18-28 inches Soil Cover: 6-16 inches

(Trench bottoms shall be level to +/- 1/4" (Maximum soil cover shall not exceed 36" above the trench bottom)

in all directions)

Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM \_\_\_\_\_ inches below pipe

Aggregate Depth: \_\_\_\_\_ inches above pipe

Conditions: FINAL LAYOUT TO BE DETERMINED AFTER \_\_\_\_\_ inches total

AREA IS CLEARED

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.  
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 3/28/16

Construction Authorization Expiration Date: 3/28/21

HTE# 16-5-39276


Permit # 28773

# Harnett County Department of Public Health Site Sketch

ISSUED TO: CHARLES GEMSKY JR PROPERTY LOCATOR: JOE COLLINS RD  
SUBDIVISION \_\_\_\_\_ LOT # \_\_\_\_\_

Authorized State Agent: ~~REMS (PLINGER TOLKSDOOR)~~ Date: 3/28/16

\*SHOP MAY BE  
TIED INTO  
SEPTIC SYSTEM

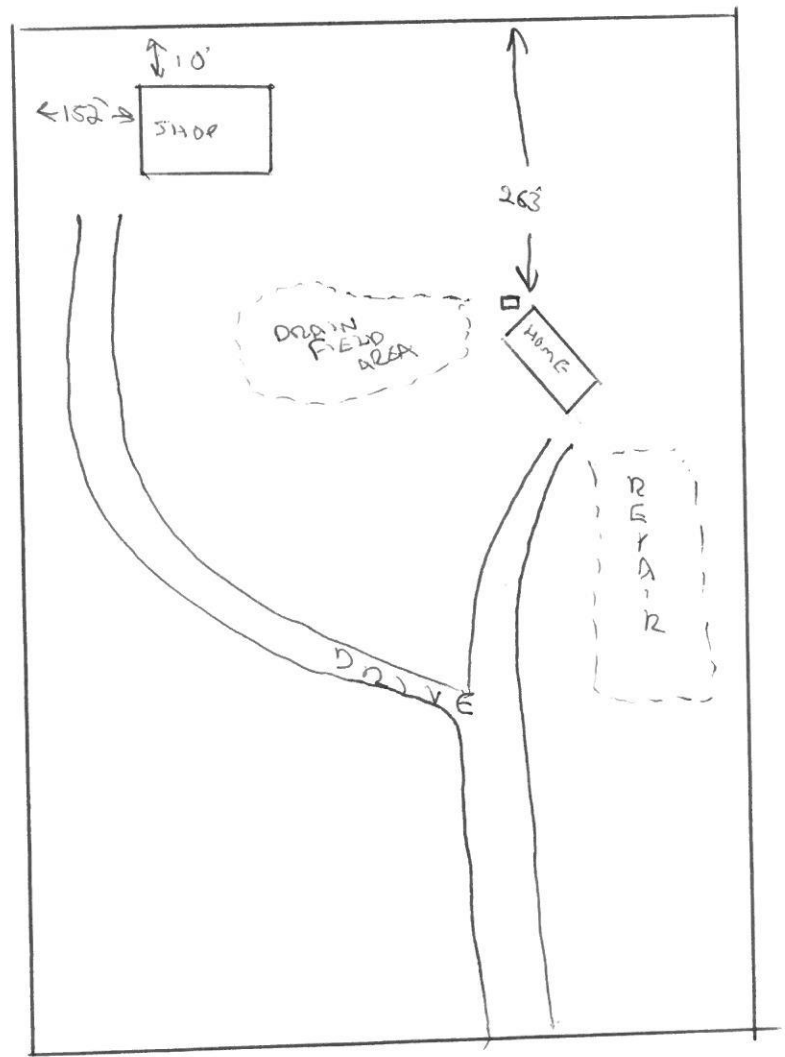

JOE COLLINS RD