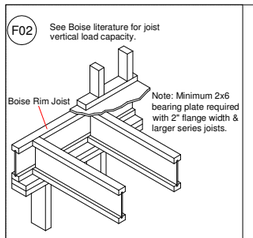



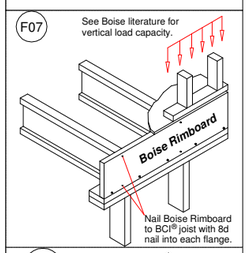



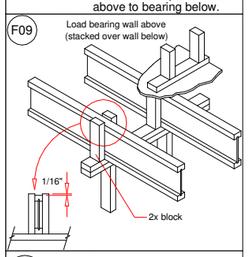

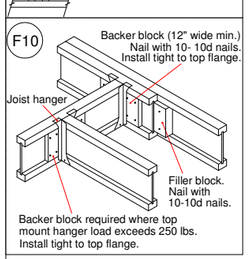

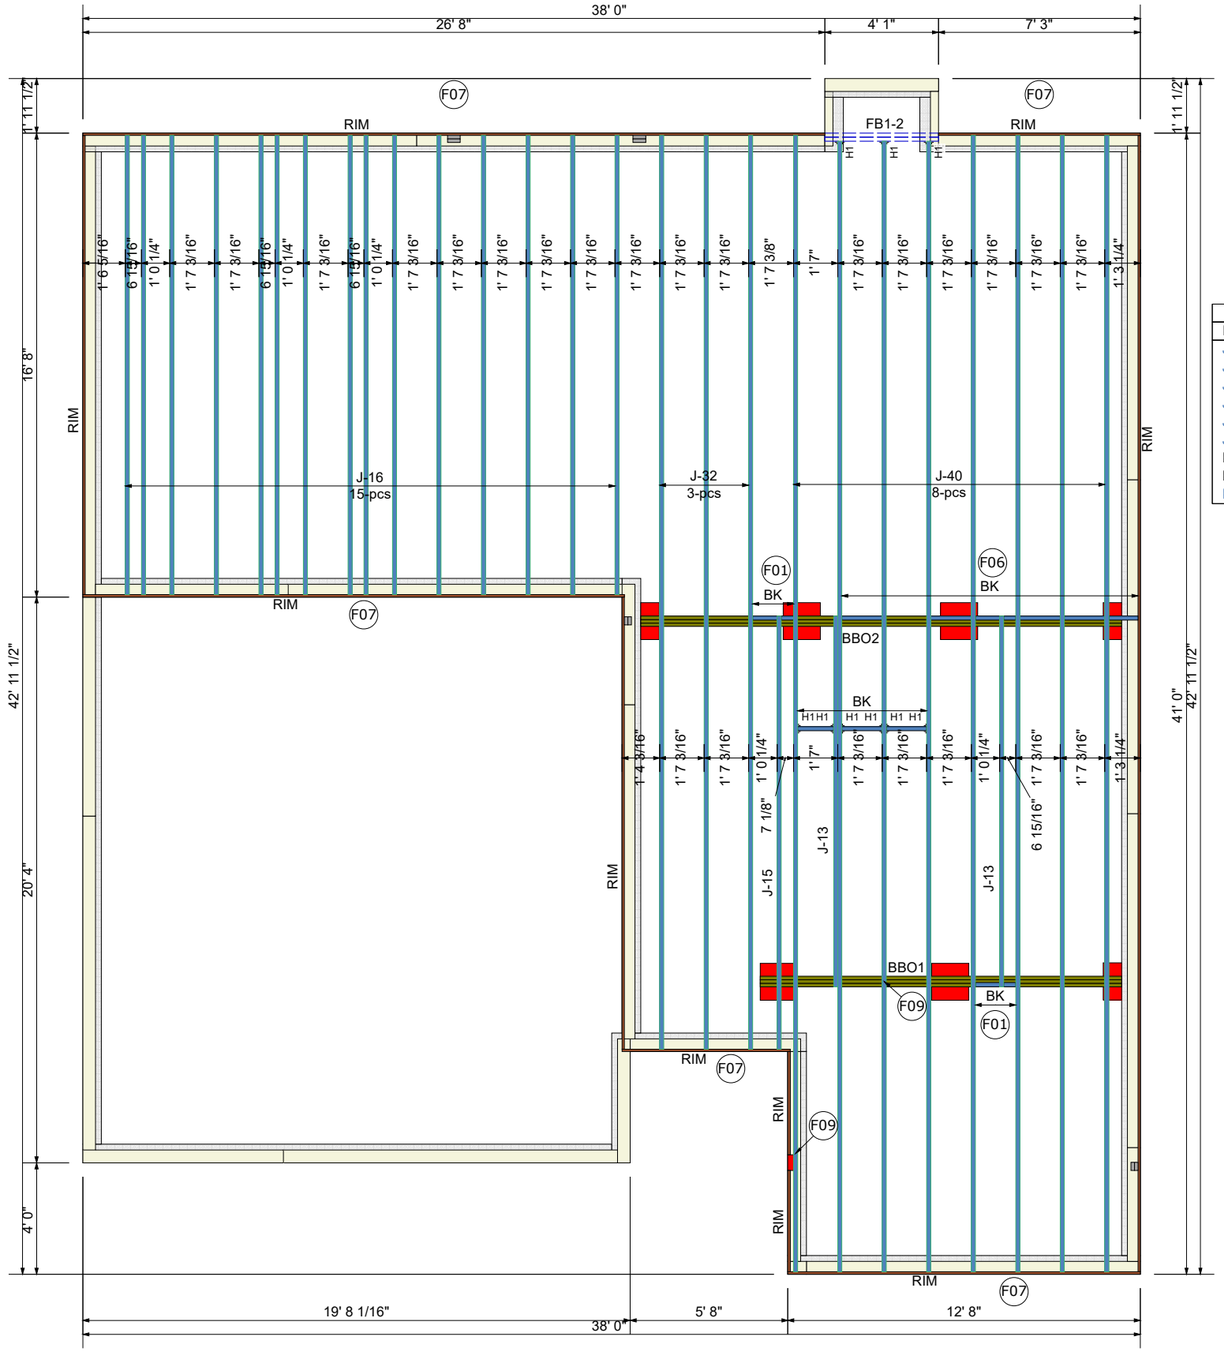

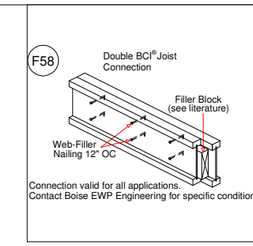

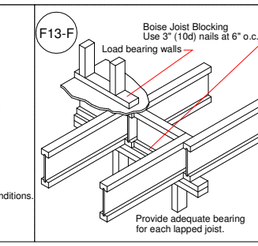

Products

PlotID	Length	Product	Plies	Net Qty
J-40	40' 10"	11-7/8" BCI® 4500s-1.8	1	5
J-40	40' 7 1/2"	11-7/8" BCI® 4500s-1.8	1	3
J-32	32' 10"	11-7/8" BCI® 4500s-1.8	1	3
J-16	16' 6 1/4"	11-7/8" BCI® 4500s-1.8	1	15
J-15	15' 6 3/4"	11-7/8" BCI® 4500s-1.8	1	1
J-13	13' 4"	11-7/8" BCI® 4500s-1.8	1	2
FB1-2	6' 0"	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
RIM	12' 0"	1" x 11-7/8" BC RIM BOARD OSB	1	13
BK	2' 0"	11-7/8" BCI® 4500s-1.8	1	8

Hangers

PlotID	Qty	Manuf	Product
H1	9	Simpson	IUS 1.81/11.88

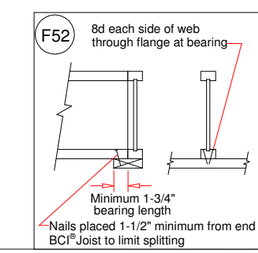

Builders FirstSource
Boise Cascade
Engineered Wood Products
www.BLDR.com
1135 Robeson St.
Fayetteville, NC 28305
V (910) 485-1111
F (910) 485-6475

7601 BOEING DRIVE
GREENSBORO, NC 27409
V: 336.884.5454

3189 NC HIGHWAY5
ABERDEEN NC 28315
V: 910.944.2516

This layout and associated materials list has been prepared based on project plans and/or information provided to Builders FirstSource (BFS). It remains the responsibility of the builder, architect, designer, or other responsible persons to review this information to assure that it is appropriate, accurate, complete and complies with applicable building codes.

GENERAL NOTES
1.) READ THE INSTALLATION GUIDE BEFORE FRAMING.
2.) ALL WALL SHOWN ARE LOAD BEARING UNLESS NOTES OTHERWISE WALLS NOT SHOWN HAVE BEEN CONSIDERED NON-LOAD BEARING
3.) UNLESS STATED OTHERWISE ALL CEILING & ROOF LOADS BRACE DIRECTLY TO LOAD BEARING WALLS SUPPORTED BY FOUNDATION
4.) CONTACT YOU LOCAL BUILDERS FIRSTSOURCE LOCATION BEFORE MAKING ANYALTERATION & ADJUSTMENTS, FAILURE MAY RESULT IN COSTLY REPAIRS

H & H HOMES

PRELUDE GL

CRAWL EWP PLACEMENT PLAN

Builders FirstSource, Central Carolina Markets

DATE: 3-27-18

DRAWN BY: LEE ATKINS

JOB #

SCALE: NTS

MINIMUM DESIGN DATA
LIVE LOAD 40 PSF
DEAD LOAD 10 PSF

TOTAL LOAD 50 PSF

STRESS DURATION = 100%

DEFLECTION CRITERIA
L/480 (MINIMUM)

ARCHITECTUAL PLAN DATE
11-16-17

REVISED ARCH. PLAN DATE
XX-XX-XX

SEALED PLAN DATE
12-27-17

Sheet
1 of 1