


Robert Barefoot
West Stewart St.
3-Bedroom Proposal
Harnett County NC

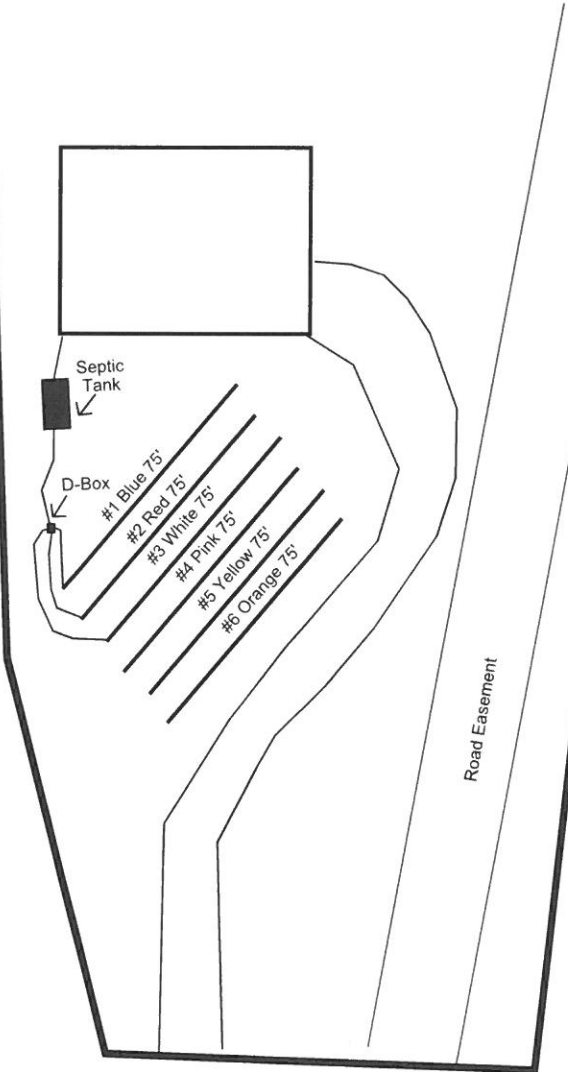

System: Gravity to D-Box
Lines: 1-3 (225')
0.4 LTAR
24" Trench Bottom
Accepted Status System
Repair: Gravity to D-Box
Lines: 4-6 (225')
0.4 LTAR
24" Trench Bottom
Accepted Status System

"West Stewart St"

GRAPHIC SCALE
1" = 50'



Adams
Soil Consulting
919-414-6761
Job #697

**Robert Barefoot
West Stewart St**

3-Bedroom Home (360 gal./day)

| <u>LINE #</u> | <u>COLOR</u> | <u>BS</u> | <u>HI</u> | <u>FS</u> | <u>ELEVATION</u> | <u>LINE LENGTH</u> | <u>Design Length</u> |
|---------------|--------------|-----------|-----------|-----------|------------------|--------------------|----------------------|
| TBM | | 0.0 | | 100.0 | | <u>in field</u> | <u>installation</u> |
| INST. 1 | | | 100.0 | | | | |
| 1 | Blue | | | 1 | 99 | 75 | 75 |
| 2 | Red | | | 2.1 | 97.9 | 75 | 75 |
| 3 | White | | | 3.2 | 96.8 | 75 | 75 |
| 4 | Pink | | | 4.2 | 95.8 | 75 | 75 |
| 5 | Yellow | | | 5.9 | 94.1 | 75 | 75 |
| 6 | Orange | | | 6.9 | 93.1 | 75 | 75 |
| 7 | Blue | | | 7.8 | 92.2 | 60 | not used |

| System Type | System Lines 1-3 | Repair Lines 4-6 |
|-------------------------------|-----------------------------------|-----------------------------------|
| | Accepted Status System EZ-FLOW | Accepted Status System EZ-FLOW |
| Suggested Soil LTAR | 0.40 | 0.40 |
| Total Line Length | 225 | 225 |
| Square Footage | 675 | 675 |
| Proposed Trench Bottom | 24" | 24" |
| Distribution Method | Gravity to D-Box | Gravity to D-Box |