


# Jonathan Taylor Neil Thomas Rd 5-Bedroom Septic Proposal



*If plumbing is not sufficient then tank could be relocated or a pump may be required to dose septic field.*

GRAPHIC SCALE  
1" = 60'

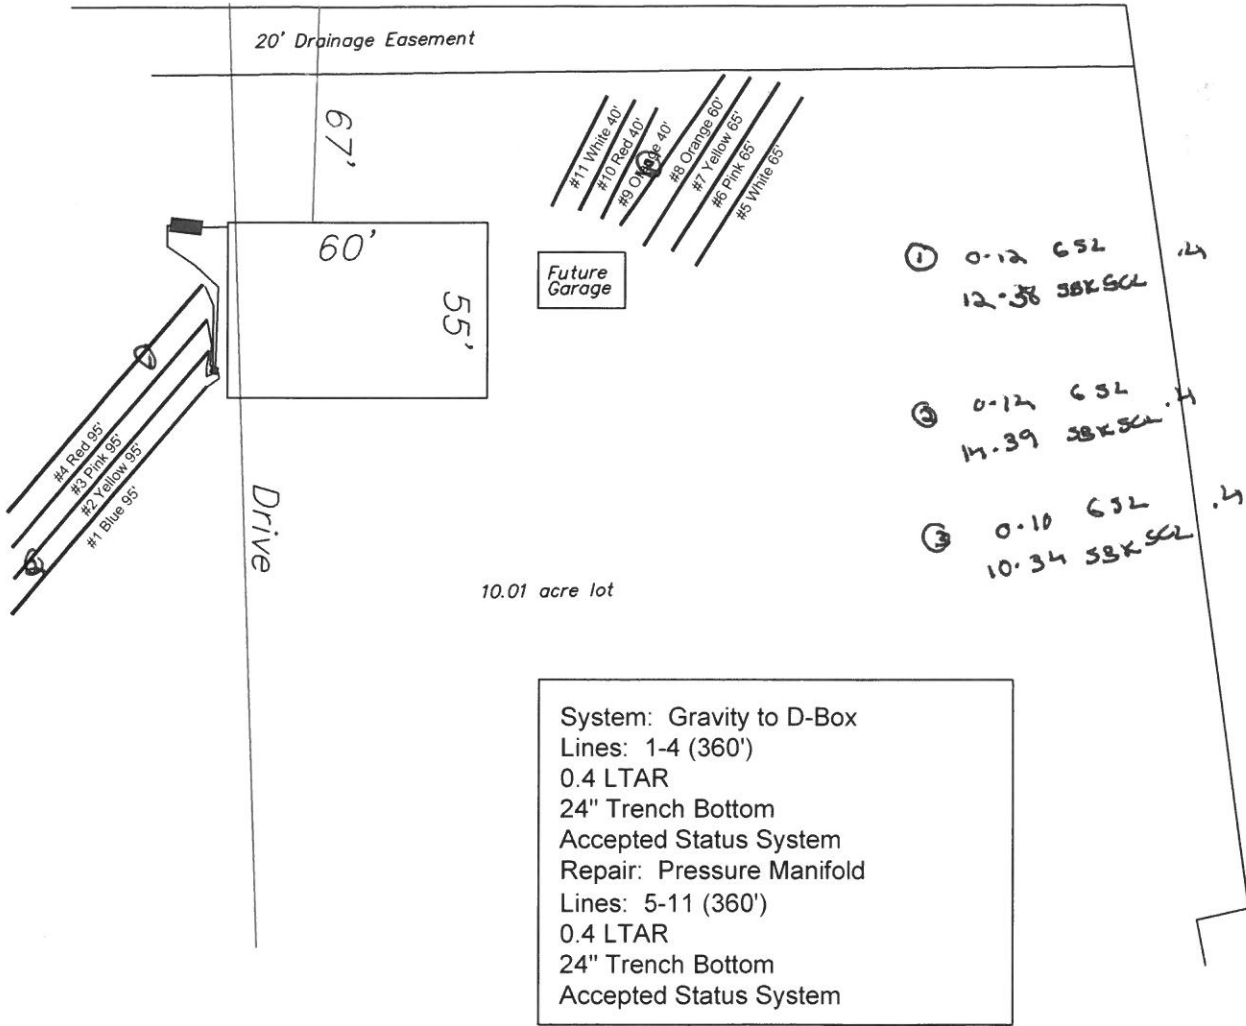

Adams  
Soil Consulting  
919-414-6761  
Job #383

**Johnathan Taylor**  
**Neil Thomas Road**

5-Bedroom Home (600 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
<i>1</i>	<i>Blue</i>			<i>3.7</i>	<i>98.3</i>	<i>95</i>	<i>95</i>
<i>2</i>	<i>Yellow</i>			<i>4</i>	<i>98</i>	<i>105</i>	<i>95</i>
<i>3</i>	<i>Pink</i>			<i>4.3</i>	<i>97.7</i>	<i>105</i>	<i>95</i>
<i>4</i>	<i>Red</i>			<i>4.6</i>	<i>97.4</i>	<i>98</i>	<i>95</i>
<i>5</i>	<i>White</i>					<i>65</i>	<i>65</i>
<i>6</i>	<i>Pink</i>					<i>65</i>	<i>65</i>
<i>7</i>	<i>Yellow</i>					<i>65</i>	<i>65</i>
<i>8</i>	<i>Orange</i>					<i>60</i>	<i>60</i>
<i>9</i>	<i>Blue</i>					<i>40</i>	<i>40</i>
<i>10</i>	<i>Red</i>					<i>40</i>	<i>40</i>
<i>11</i>	<i>White</i>					<i>40</i>	<i>40</i>
<i>12</i>	<i>Pink</i>					<i>40</i>	<i>40</i>

	<u>System</u>	<u>Repair</u>
	Lines 1-4	Lines 5-12
<b>System Type</b>	Accepted Status System EZ-FLOW	Accepted Status System EZ-FLOW
<b>Suggested Soil LTAR</b>	0.40	0.40
<b>Total Line Length</b>	375	375
<b>Square Footage</b>	1125	1125
<b>Proposed Trench Bottom</b>	24"	24"
<b>Distribution Method</b>	Gravity to D-Box	Pumpt to Manifold