

Avery Pond


Lot #51

3-Bedroom Home (360 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	Red			4.6	97.4	90	75
2	Blue			5.4	96.6	90	75
3	Orange			6.2	95.8	90	75
4	Yellow			6.8	95.2	85	75
5	Pink			7.4	94.6	77	60
6	White			7.9	94.1	70	60
7	Red			8.4	93.6	65	60
8	Blue			9.2	92.8	65	60
9	Orange			10.2	91.8	65	60

	<u>System</u>	<u>Repair</u>
	Lines 1-4	Lines 5-9
System Type	Accepted Status System EZ-FLOW	Accepted Status System EZ-FLOW
Suggested Soil LTAR	0.30	0.30
Total Line Length	300	300
Square Footage	900	900
Proposed Trench Bottom	24"	24"
Distribution Method	Gravity to D-Box	Gravity to D-Box

Avery Pond 3-Bedroom Septic Proposal Lot #51

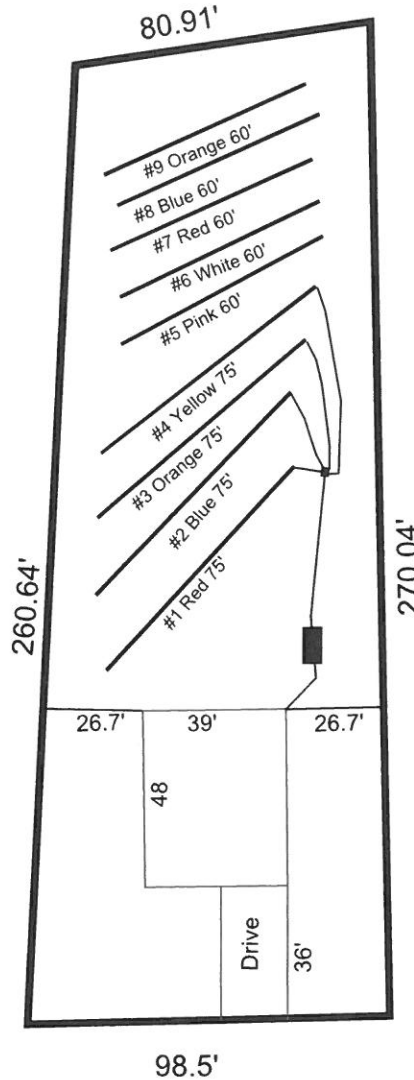

System: Gravity to D-Box
 Lines: 1-4 (300')
 0.3 LTAR
 18-24" Trench Bottom
 Accepted Status System
 Repair: Gravity to D-Box
 Lines: 5-9 (300')
 0.3 LTAR
 18-24" Trench Bottom
 Accepted Status System

Avery Pond Drive

GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #708