

Avery Pond

Lot #175

3-Bedroom Home (360 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
<i>1</i>	<i>Orange</i>			<i>3.2</i>	<i>98.8</i>	<i>100</i>	<i>100</i>
<i>2</i>	<i>Yellow</i>			<i>3.7</i>	<i>98.3</i>	<i>100</i>	<i>100</i>
<i>3</i>	<i>Blue</i>			<i>4</i>	<i>98</i>	<i>100</i>	<i>100</i>
<i>4</i>	<i>White</i>			<i>4.4</i>	<i>97.6</i>	<i>100</i>	<i>100</i>
<i>5</i>	<i>Red</i>			<i>4.7</i>	<i>97.3</i>	<i>100</i>	<i>100</i>
<i>6</i>	<i>Pink</i>			<i>5.6</i>	<i>96.4</i>	<i>100</i>	<i>100</i>


	<u>System</u>	<u>Repair</u>
	Lines 1-3	Lines 4-6
System Type	Accepted Status System EZ-FLOW	Accepted Status System EZ-FLOW
Suggested Soil LTAR	0.30	0.30
Total Line Length	300	300
Square Footage	900	900
Proposed Trench Bottom	24"	24"
Distribution Method	Gravity to D-Box	Gravity to D-Box

Avery Pond 3-Bedroom Septic Proposal Lot #175

175

0.529 AC.

System: Gravity to D-Box
 Lines: 1-3 (300')
 0.3 LTAR
 18-24" Trench Bottom
 Accepted Status System
 Repair: Gravity to D-Box
 Lines: 4-6 (300')
 0.3 LTAR
 18-24" Trench Bottom
 Accepted Status System

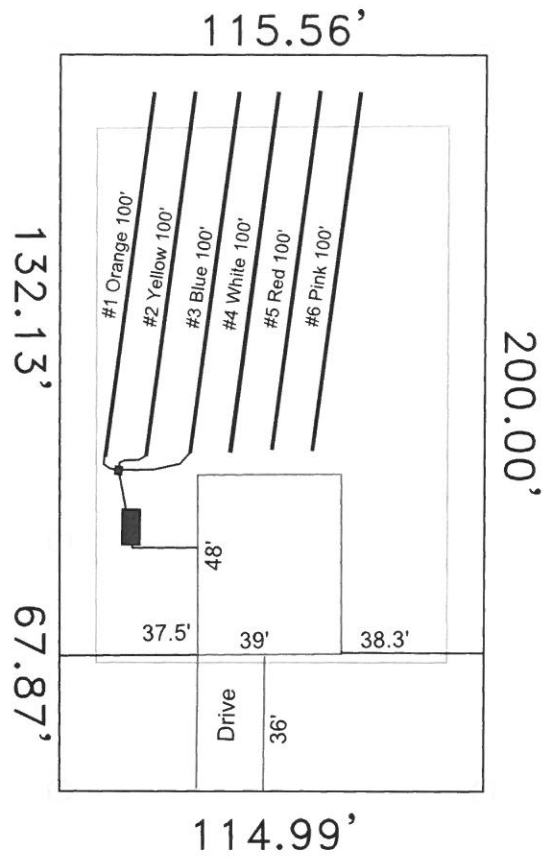

Avery Pond Drive

GRAPHIC SCALE
1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #708