



THIS LAYOUT IS INTENDED FOR THE PURPOSE OF TRUSS LOCATION AND PLACEMENT ONLY. REFER TO THE BUILDING PLANS FOR ACTUAL BUILDING CONSTRUCTION.

Truss Connector Total List		
Manuf	Product	Qty
SIMPSON	HUS26	15
SIMPSON	LGT2	2

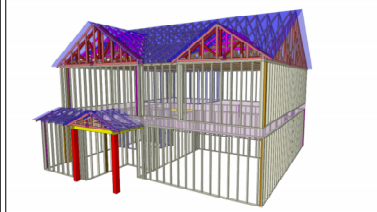

1st Level Roof Area	2nd Level Roof Area
0	0

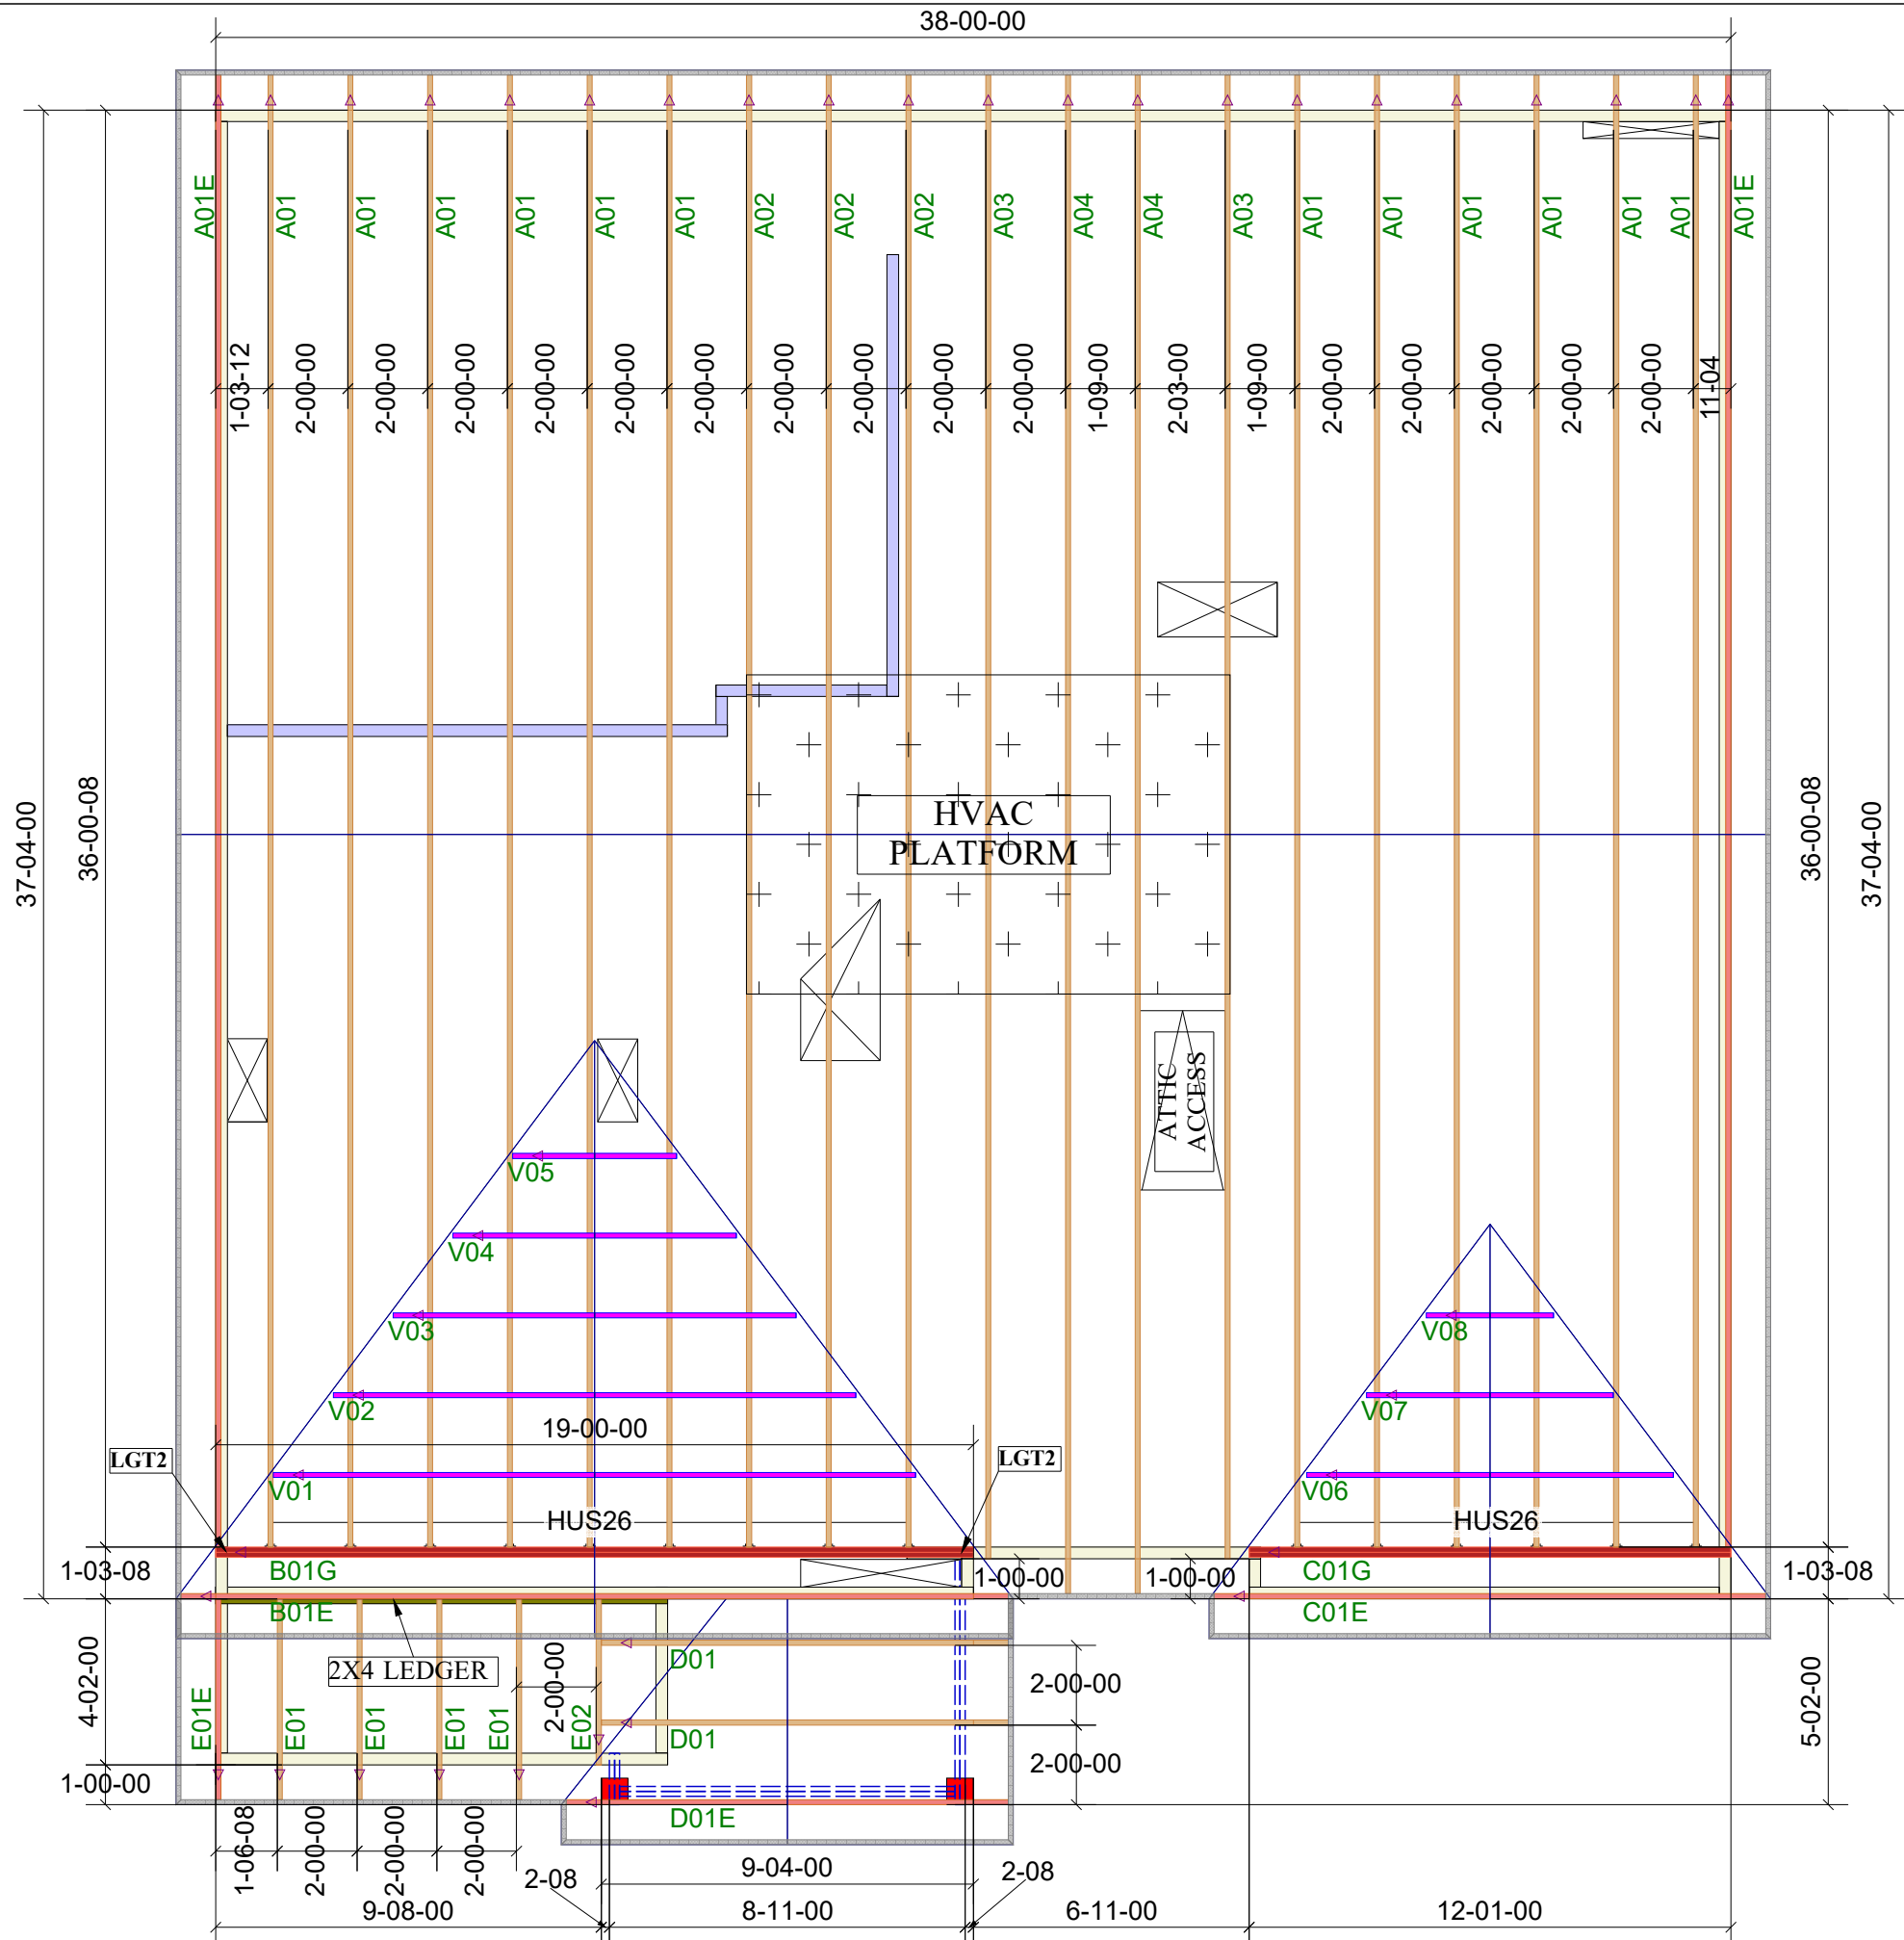

DEDICATED TO QUALITY AND EXCELLENCE
 200 EMMETT ROAD
 DUNN, NORTH CAROLINA 28334
 PHONE: 910-892-8400

PROJECT:	LOT 59 BIRCHWOOD GROVE		
CUSTOMER:	KB HOME		
MODEL:	238-2338 - ELEVATION A - GR		
QUOTE #:	39229	PRINT DATE:	8/31/2023
		DRAWN BY:	Mike Bolt
		SCALE:	N.T.S

TOP LIVE LOAD:	20
TOP DEAD LOAD:	10
BOTTOM DEAD LOAD:	10
WIND SPEED:	130

GENERAL NOTES:

- DO NOT CUT OR MODIFY TRUSSES
- TRUSSES ARE SPACED 24" ON CENTER UNLESS OTHERWISE NOTED
- REFER TO THE INDIVIDUAL TRUSS DESIGN DRAWINGS FOR THE LOCATION OF LATERAL BRACING AND MULTI-PLY CONNECTION REQUIREMENTS.
- PER ANSI TPI 1-2002 THE TRUSS ENGINEER IS RESPONSIBLE FOR TRUSS TO TRUSS CONNECTIONS AND TRUSS PLY TO PLY CONNECTIONS. THIS TRUSS PLAN RECOMMENDS TRUSSES TO BEARING CONNECTIONS AND TRUSSES TO BEAM CONNECTIONS WHICH SHALL BE REVIEWED BY THE BUILDING DESIGNER. IT IS THE RESPONSIBILITY OF THE BUILDING DESIGNER TO RESOLVE ALL ROOF FORCES ADEQUATELY TO THE FOUNDATION.