

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Seven Magnolias Const PROPERTY LOCATION: 51723 Turlington RD
 SUBDIVISION _____ LOT # 2
 NEW REPAIR EXPANSION Site Improvements required prior to Construction Authorization Issuance: _____
 Type of Structure: SFD
 Proposed Wastewater System Type: 25% Reduct
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet Permit valid for: Five years
 Permit conditions: _____ No expiration

Authorized State Agent: James E. Markham Date: 6-28-19 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Seven Magnolias Const PROPERTY LOCATION: 51723 Turlington RD
 SUBDIVISION _____ LOT # 2
 Facility Type: SFD New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% Reductur System (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable 25% Reductur (Repair))

Installation Requirements/Conditions

Septic Tank Size <u>1000</u> gallons	Number of trenches <u>3 or 2</u>	Trench Spacing: <u>9</u> Feet on Center
Pump Tank Size <u>1000</u> gallons	Exact length of each trench <u>100 or 150</u> feet	Soil Cover: <u>6</u> inches
	Trenches shall be installed on contour at a	(Maximum soil cover shall not exceed
	Maximum Trench Depth of: <u>18"</u> inches	36" above the trench bottom)
	(Trench bottoms shall be level to +/-1/4" in all directions)	
Pump Requirements: _____ ft. TDH vs. _____ GPM		<u>8</u> inches below pipe
Conditions: <u>Contractor to meet ON SITE PRIOR TO INSTALL</u>		Aggregate Depth: <u>2</u> inches above pipe
<u>Proper Before Plumbing IS STUBBED OUT</u>		<u>12</u> inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Markham Date: 6-28-19
 Construction Authorization Expiration Date: 6-28-24

HTE# SFD1904-0066

Permit # 30529


Harnett County Department of Public Health Site Sketch

ISSUED TO: Seven Magnolias Court PROPERTY LOCATOR: SR 1723 Tuxington RD SUBDIVISION _____ LOT # 2

Authorized State Agent: James E. Maxlowt #12345 Date: 6-28-19

- * Contractor to meet ON SITE prior to install.
- * Pump may be required.
- * Layout may change from illustration.
- * This drawing is for illustrated purposes only. System install must meet all pertinent laws, rules and regulations.

197.55

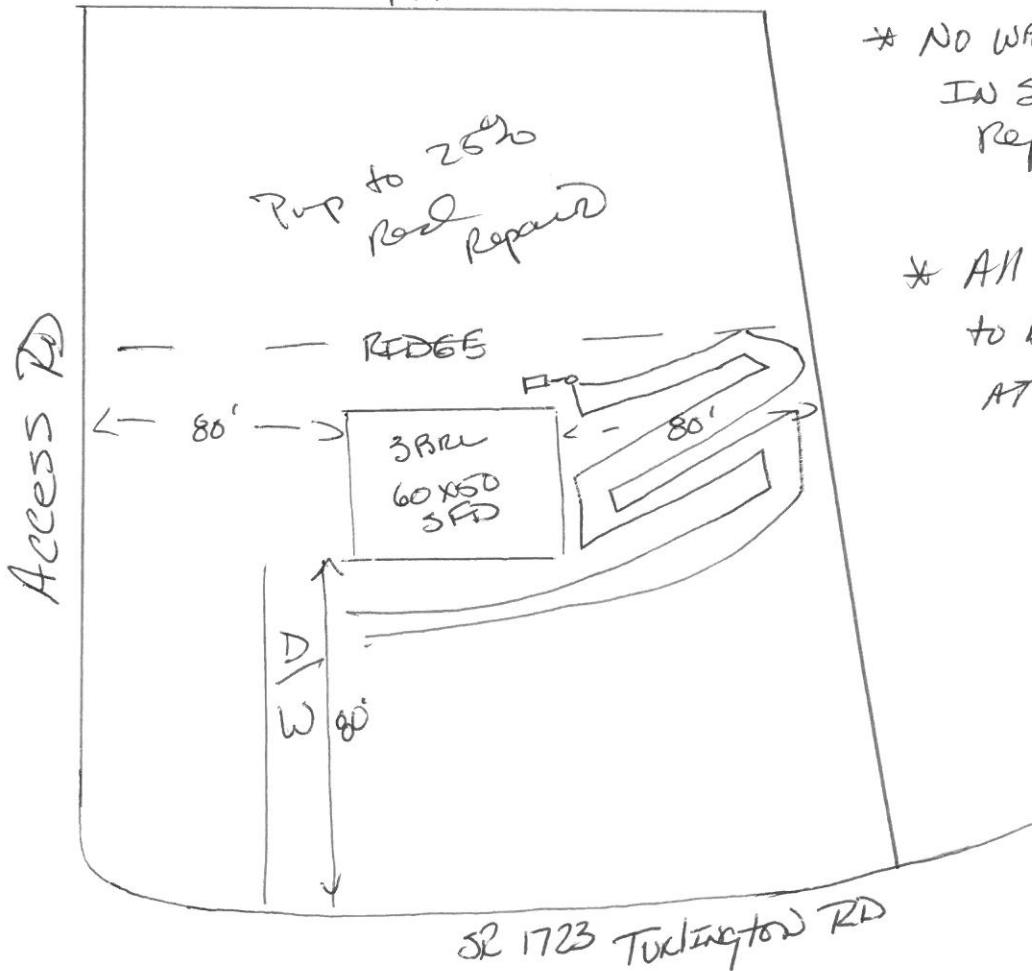

* NO WATER or Power IN Septic or Repair AREAS

* All Connections to be Demonstrated AT Final.