

## Harnett County Department of Public Health Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: KB Homes Carolinas      PROPERTY LOCATION: 73 White Quartz Pl. (Christian Light Road - SR 1412)  
 SUBDIVISION Mason Pointe      LOT # 52

NEW       REPAIR       EXPANSION       Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: 4-bedroom 50'x70' SFD

Proposed Wastewater System Type: 25% Reduction System

Projected Daily Flow: 480      GPD

Number of bedrooms: 4      Number of Occupants: 8      max

Basement  Yes       No

Pump Required:  Yes       No       May be required based on final location and elevations of facilities

Type of Water Supply:  Community       Public       Well      Distance from well NA      feet      Permit valid for:       Five years  
 No expiration

Permit conditions: \_\_\_\_\_

Authorized State Agent: [Signature]      Date: 06/05/2019      SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

### Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: KB Homes Carolinas      PROPERTY LOCATION: 73 White Quartz Pl. (Christian Light Road - SR 1412)  
 SUBDIVISION Mason Pointe      LOT # 52

Facility Type: 4-bedroom 50'x70' SFD       New       Expansion       Repair

Basement?  Yes       No      Basement Fixtures?  Yes       No

Type of Wastewater System\*\* 25% Reduction System      (Initial) Wastewater Flow: 480      GPD  
 (See note below, if applicable  25% Reduction System      (Repair))

**Installation Requirements/Conditions**

Septic Tank Size <u>1000</u> gallons	Number of trenches <u>1</u>	Exact length of each trench <u>300</u> feet	Trench Spacing: <u>9</u> Feet on Center
Pump Tank Size _____      gallons	Trenches shall be installed on contour at a	Maximum Trench Depth of: <u>24</u> inches	Soil Cover: <u>12</u> inches
	(Trench bottoms shall be level to +/-1/4"	in all directions)	(Maximum soil cover shall not exceed 36" above the trench bottom)

Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM      Aggregate Depth: NA      inches below pipe  
NA      inches above pipe  
NA      inches total

Conditions: \_\_\_\_\_

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.  
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.**

Owner/Legal Representative Signature: \_\_\_\_\_      Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.      SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature]      Date: 06/05/2019  
 Construction Authorization Expiration Date: 06/05/2024

HTE# SFD1905-0032


Permit # NA

# Harnett County Department of Public Health Site Sketch

ISSUED TO: KB Homes Carolinas PROPERTY LOCATION: 73 White Quartz Pl. (Christina Ct. Rd.) <sup>521412</sup>  
SUBDIVISION: Mason Pointe LOT # 52

Authorized State Agent: *[Signature]* Date: 06/05/2015  
ANDREW CURRIN

\*PROPOSAL BY CENTRAL  
CAROLINA SOIL CONTRACTING

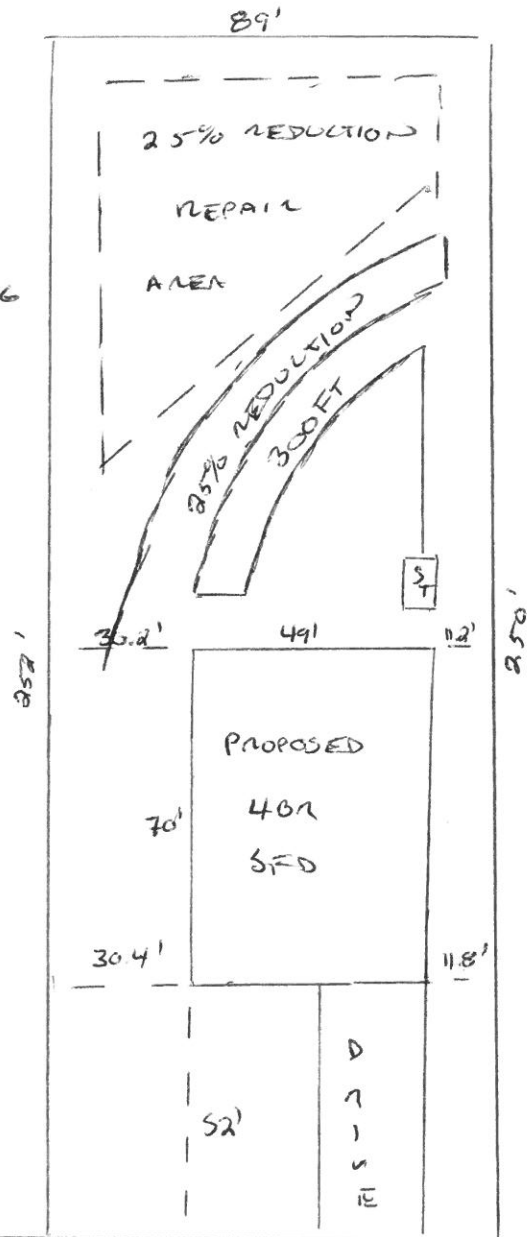

WHITE QUARTZ PL.