DEPARTMENT OF HEALTH AND HUMAN SERVICES DIVISION OF PUBLIC HEALTH, ENVIRONMENTAL HEALTH SECTION ON-SITE WATER PROTECTION BRANCH

	Page 1 of
PROPERTY ID #:	
COUNTY: _	

SOIL/SITE EVALUATION for ON-SITE WASTEWATER SYSTEM (Complete all fields in full)

DATE EVALUATED: 1-26-24 ADDRESS: 556 Homestead UN ROPOSED FACILITY: SFD 40 ×40' PROPOSED DESIGN FLOW (.0400): 480 PROPERTY SIZE:										
OCATION OF SITE: PROPERTY RECORDED: WATER SUPPLY: Public Single Family Well Shared Well Spring Other WATER SUPPLY SETBACK:										
EVALUATION METHOD: Auger Boring Pit Cut TYPE OF WASTEWATER: Domestic High Strength IPWW										
P R O F			SOIL MORPHOLOGY		OTHER PROFILE FACTORS					
I L E	.0502 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	.0503 STRUCTURE/ TEXTURE	.0503 CONSISTENCE/ MINERALOGY	.0504 SOIL WETNESS/ COLOR	.0505 SOIL DEPTH	.0506 SAPRO CLASS	.0507 RESTR HORIZ	.0509 PROFILE CLASS & LTAR*	.0503 SLOPE CORRE CTION
	3-4%	0-37	SL, g(Fr, NS, dp, SE		48 "			,,	
1		37-48	SCL, SBK	Fryss, NP, SE		48			.4	
┝	3-4%	0.22	CI C	- 4 1102						
		0-32	Sel, SBK	Fr, NS, NP, SE Fr, SS, NP, SE		48"				
2		32-48	26,000	11,55, NY,51		10			.4	
2										
3										
_										
4										
l										
Witness To London	ALC: N. P. ST. B. ST. ST. ST. ST. ST. ST. ST. ST. ST. ST	Section 10 Texts of the		AND LOCALISM STATE OF THE SECOND STATE OF THE		Company of the second	Anna Anna ann an Anna ann an	Mary Constitution of the C	AMERICAN PROPERTY OF THE PARTY	

DESCRIPTION	INITIAL SYSTEM	REPAIR SYSTEM	
Available Space (.0508)	~		SITE CLASSIFICATION (.0509): PS
System Type(s)	25% Red	23%. Rea	EVALUATED BY: RL/JM
Site LTAR	.4,	.4	OTHER(S) PRESENT:
Maximum Trench Depth	18-2211	1811-221	
C	-	•	

Comments:

LEGEND

LANDSCAPE POSITION	SOIL GROUP	SOIL TEXTURE	CONVENTIONAL LTAR (gpd/ft²)			LPP LTAR (gpd/ft²)	MINERALOGY/ CONSISTENCE		STRUCTURE
CC (Concave slope)		S (Sand)	0.8 - 1.2	0.6	0.6 - 0.8		MOIST	WET	SG (Single grain)
CV (Convex Slope)		LS (Loamy sand)		0.5	-0.7	0.4 -0.6	Lo (Loose)	NS (Non-sticky)	M (Massive)
D (Drainage way)		SL (Sandy loam)	0.6 - 0.8	0.4	-0.6	0.3 - 0.4	VFR (Very friable)	SS (Slightly sticky)	GR (Granular)
FP (Flood plain)		L (Loam)		0.2	- 0.4		FR (Friable)	S (Sticky)	SBK (Subangular blocky)
FS (Foot slope)		SiL (Silt loam)		0.1	- 0.3	0.15 - 0.3	FI (Firm)	VS (Very sticky)	ABK (Angular blocky)
H (Head slope)		SCL (Sandy clay loam)		0.05 -	0.15**		VFI (Very firm)	NP (Non-plastic)	PR (Prismatic)
L (Linear Slope)	in	CL (Clay loam)	0.3 - 0.6	None	None		EFI (Extremely firm)	SP (Slightly plastic)	PL (Platy)
N (Nose slope)		SiCL (Silty clay loam)						P (Plastic)	
R (Ridge/summit)		Si (Silt)						VP (Very plastic)	
S (Shoulder slope)		SC (Sandy clay)				0.05 - 0.2	SEXP (Slightly expansive)		
T (Terrace)	IV	SiC (Silty clay)	0.1 - 0.4				EXP (Expansive)		
TS (Toe Slope)		C (Clay)				_			
		O (Organic)	None						

HORIZON DEPTH In inches below natural soil surface


DEPTH OF FILL In inches from land surface

RESTRICTIVE HORIZON Thickness and depth from land surface

S(suitable) or U(unsuitable); Evaluation of saprolite shall be by pits. **SAPROLITE**

SOIL WETNESS Inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - record Munsell color chip designation

CLASSIFICATION S (Suitable) or U (Unsuitable)

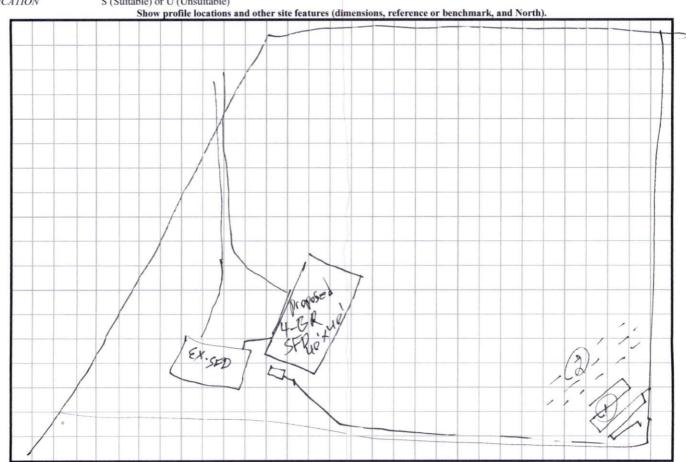

^{*} Adjust LTAR due to depth, consistence, structure, soil wetness, landscape, position, wastewater flow and quality.

**Sandy clay loam saprolite can only be used with advanced pretreatment in accordance with 15A NCAC 18E .1200.

