APPROVED Harnett 12/29/2023

ELEVATION NOTES.

GRADE ELEVATIONS SHOUIN DO NOT NECESSARLY REFER TO THIS OR ANY OTHER LOT. THEY ARE
FOR DIAGRAMMATIC PURPOSES ONLY AND MAY VARY. BUILDER IS RESPONSIBLE FOR ADAPTING THIS PLAIT
TO BUILT HE EXISTING TOPOGRAPHY OF THE SITE.

ROOF VENTILATION TO BE DETERMINED BY BUILDER AS PER CODE.

ALL EGRESS OR RESCUE WINDOWS FROM SLEEPING ROOMS MUST HAVE A MIN. NET CLEAR OPENING OF 4.0 8Q FT. THE MIN NET CLEAR OPENING HEIGHT DIMENSION SHALL BE 22", THE MIN NET CLEAR OPENING WIDTH SHALL BE 20".

EACH EGRESS WINDOW FROM SLEEPING ROOMS MUST HAVE A SILL HIGHT OF NO MORE THAN 44" FROM THE FLOOR. ALL UINDOW SIZES ARE NOMINAL AND ARE TO BE VERFIED WITH MANUFACTURER FOR AVAILABILITY AND CONFORMITY TO STATE AND LOCAL CODE REQUIREMENTS.

PORCHES, BALCONIES, OR RAISED FLOOR SURFACES LOCATED MORE THAN 30" ABOVE THE FLOOR OR GRADE BELOW SHALL HAVE GUARDRAILS NOT LESS THAN 32" IN HEIGHT.

I ASSUME NO RESPONSIBILITY FOR ANY DISTANCES AFTER START OF CONSTRUCTION.
CONTRACTOR/SUILDER SHALL CONSULT WITH HOME DUNER ON ALL INTERIOR AND EXTERIOR MOLDINGS, TRIMS, COLORS, FINISHES, CABINET LAYOUTS, AND MANURACTORS BEFORE CONSTRUCTION BEGINS.
ALL BEAMS AND PRACHING HEMBERS ARE SIZED BY OTHERS.

1.1 This plan has been drawn to comply with the 2018 NC Building Code

1.2 Minimum Design Loads for Building and Other Structures ASCE T-9B 2 Roof Dead Load 15 PSF 3 Roof Live Load 20 PSF

Typical Floor Dead Load 10 PSF

Floor Live Loads

5.1 Rooms other than sleeping rooms 40 PSF 5.2 Sleeping Rooms 30 PSF 5.3 Stairs 40 PSF

5.4 Decks 40 PSF 5.5 Exterior Balconies 60 PSF

Wind Loads

6.1 Ultimate Design Wind Speeds 15 MPH

6.2 Wind Importance Factor, IW 1.00 6.3 Exposure B


6.4 Walls (Component and Cladding) 25 PSF


6.5 Roofs (Component and Cladding)
6.5.1 Roof Slopes 2.25/12 to 7/12 34.8 PSF
6.5.2 Roof Slopes 7/12 to 12/12 21 PSF

It is the sole responsibility of the Contrastor and/or Builder to conform to all standards, provisions, requirements, methods of construction and uses of neterials provided in buildings and/or structures as required by NC Uniform Building Code, Local Agencia and in accordance with good engineering practices. Verify all climensions prior to construction.



LÁMCO CUSTOM BUILDERS/LÁMCO HOMES RETAINS TITLE AND OWNERSHIP OF ALL PLANS, THESE PLANS CAN NOT BE COPIED OR REPRODUCED, THESE PLANS CAN NOT BE BUILT BY ANYONE OTHER THAN LAMCO CUSTOM BUILDERS/LAMCO HOMES

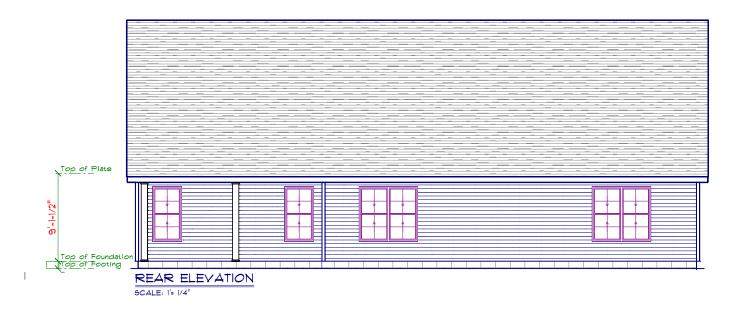

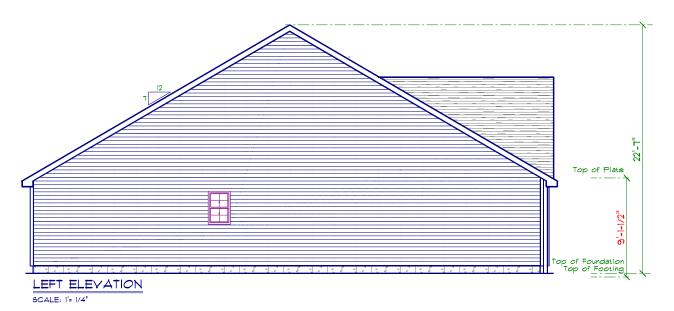





SCALE: 1'=/4"

LAMCO CUSTOM BUILDERS/LAMCO HOMES RETAINS TITLE AND OWNERSHIP OF ALL PLANS. THESE PLANS CAN NOT BE COPIED OR REPRODUCED. THESE PLANS CAN NOT BE BUILT BY ANYONE OTHER THAN LAMCO CUSTOM BUILDERS/LAMCO HOMES

## STEM WALL FOUNDATION Detail not to scale

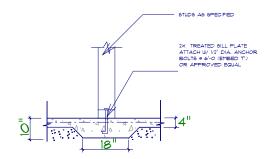

## TYPICAL THICKENED SLAB

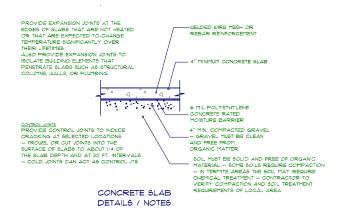

FOUNDATION NOTES: ALL FOOTINGS SHALL BEAR ON ORIGINAL UNDISTURBED SOIL. THE 28 DAY COMPRESSIVE STRENGTH OF ALL FOOTINGS IS 3000 PSI


PROVIDE WATER PROOFING AND PERIMETER DRAINS AS REQUIRED.

FOUNDATION CONCRETE MIX TO HAVE 1-1/2" MAX AGGREGATE SIZE, CONCRETE FILL MIX TO HAVE 1/2" MAX AGGREGATE SIZE. FOOTING WIDTHS ARE BASED ON A LOAD-BEARING SOIL CAPACITY OF 2000 PSI.

PROVIDE 6 MIL POLY VAPOR BARRIER TO COVER GROUND SURFACE IN CRAUL SPACE

ALL ANCHOR BOLTS TO BE  $12^{\circ}$  LONG,  $1/2^{\circ}$  DIA. A36 UNO ANCHOR BOLTS SHALL BE SPACE AT A M. OF 6° OC AND NO MORE THAN 1' FROM EA CORNER.

aurface before vapor barrier is installed and slab is poured with a state approved termiticide. Termiticide should be applied by a licensed and certified pest control professional by the state of North Carolina.

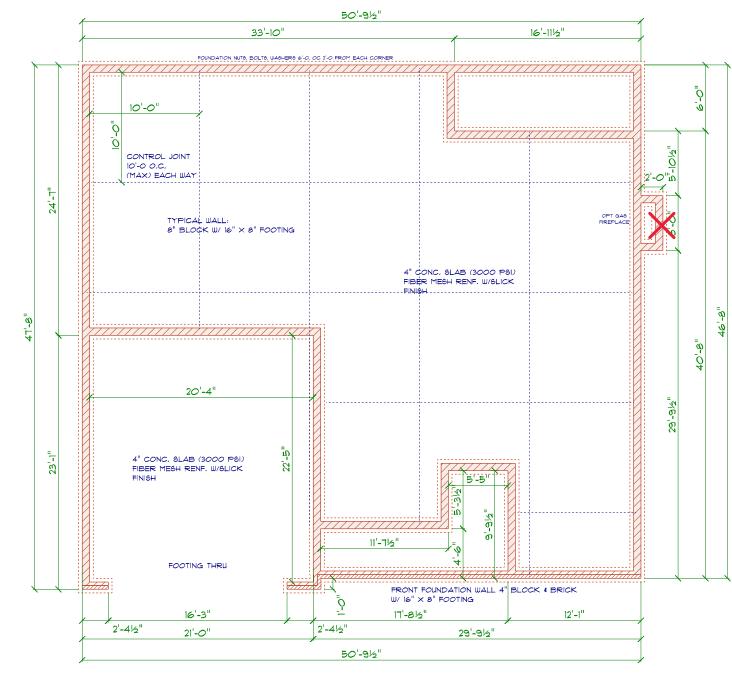

## FOUNDATION PLAN

SCALE: 1'= 1/4"

DRD

HOMES

LAMCO

GARAGE

THE MAND!

LAMCO CUSTOM BUILDERS/LAMCO HOMES RETAINS TITLE AND OWNERSHIP OF ALL PLANS. THESE PLANS CAN NOT BE COPIED OR REPRODUCED. THESE PLANS CAN NOT BE BUILT BY ANYONE OTHER THAN LAMCO CUSTOM BUILDERS/LAMCO HOMES

	OPENING SCHEDULE					
SIZE		COUNT	LIBRARY NAME	R.O. WIDTH	R.O. HEIGHT	
2'-8" x 5'-0"		3	Window\Single Hung	32"	60-1/2"	
2'-8" x 5'-0" Dbl		5	Window\Single Hung	64-1/2"	60-1/2"	
2'-0" x 3'-0"		2	Window\Single Hung	24"	36"	
2'-4" x 3'-0"		1	Window\Single Hung	28"	36"	

GENERAL FRAMING NOTES

ALL LUMBER IN CONTACT WITH CONCRETE OR MASONRY SHALL BE PRESSURE TREATED

FRAMING LUMBER SHALL BE SYP 12 GRADE AND/O

SPRUCE PINE FIR \*I AND/OR \*2, KILN DRIED.

WHERE PRE-ENGINEERED JOI6T6 ARE U6ED, JOI6T MANUFACTURER 6HALL PROVIDE 6HOP DRAWING6, WHICH BEAR 6EAL OF A N.C. ENGINEER.

STUDS AND JOISTS SHALL NOT BE CUT TO INSTALL PLUMBING OR WIRING WITHOU ADDING METAL OR WOOD SIDE PANELS TO STRENGTHEN THE MEMBER TO ITS ORIGINAL CAPACITY.

NAIL MULTIPLE MEMBERS WITH 2 ROWS OF IGH NAILS STAGGERED 32" OC AN USE

NAIL FLOOR JOISTS TO SILL PLATE WITH 8d TOE NAILS.

ALL EXPOSED FRAMING ON PORCHES AND DECKS SHALL BE PRESSURE TREATED

PROVIDE WATERPROOFING AND DRAINS AS REQUIRED.


ALL FRAMING TO BE 16" OC UNO. WALL FRAMING DIMENSIONS ARE BASED ON 2 X STUDS UNO. DOUBLE STUDS UNDER ALL HEADERS.

LVL'S AND TUI'S TO BE SIZED BY OTHERS

EXTERIOR WALLS IN LIVING AREAS ARE  $2 \times 4$ 

It is the sole responsibility of the Contractor and/or Builder to conform to all standards, provisions, requirements, methods of construction and uses of materials provided in buildings and/or structures as required by NC Uniform Building Code, Local Agencies and in accordance with good engineering practices. Verify all dimensions prior to construction.

LAMCO CUSTOM BUILDERS/LAMCO HOMES RETAINS TITLE AND OWNERSHIP OF ALL PLANS. THESE PLANS CAN NOT BE COPIED OR REPRODUCED, THESE PLANS CAN NOT BE BUILT BY ANYONE OTHER THAN LAMCO CUSTOM BUILDERS/LAMCO HOMES

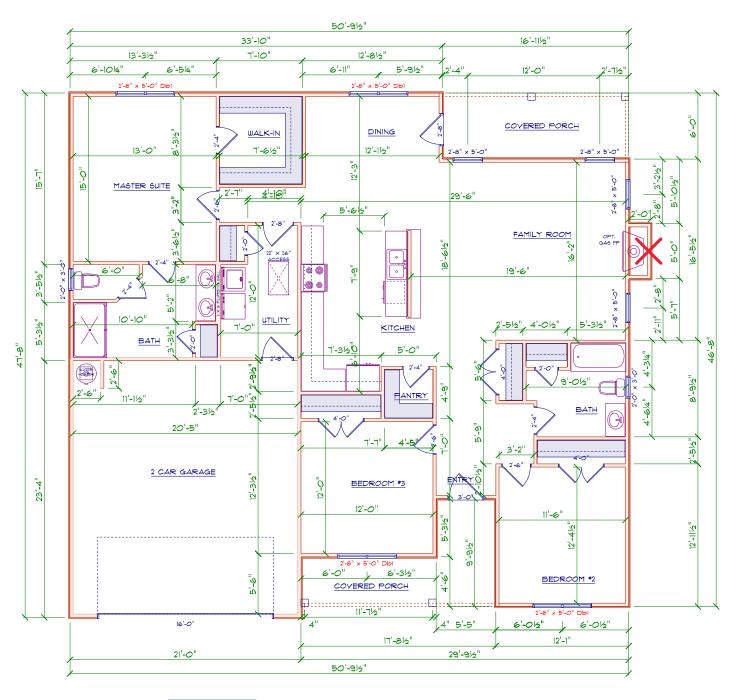

DRD


AMCO

MANDI

FRONT



AREA SCHEDULE				
NAME	AREA			
Heated	1717.1 sq ft.			
Garage	489.2 sq ft.			
Covered Front Porch	103.2 sq ft.			
Covered Rear Porch	101.8 sq ft.			

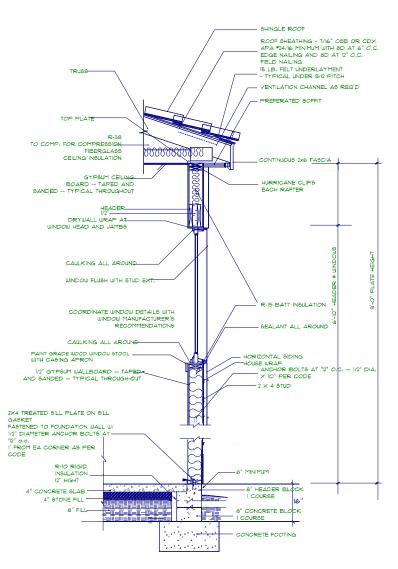

STEM WALL FOUNDATION DETAIL

not to scale

LAMCO CUSTOM BUILDERS/LAMCO HOMES RETAINS TITLE AND OWNERSHIP OF ALL PLANS. THESE PLANS CAN NOT BE COPIED OR REPRODUCED. THESE PLANS CAN NOT BE BUILT BY ANYONE OTHER THAN LAMCO CUSTOM BUILDERS/LAMCO HOMES


## ROOF NOTES:


TRUSSES, BRACINGS, BRIDGING AND CONNECTORS ARE TO BE DESIGNED BY THE TRUSS MANUFACTURER.

IDENTIFY LUMBER BY OFFICIAL GRADE MARKINGS.

DO NOT CUT OR REMOVE CHORDS OR OTHER TRUSS MEMBERS, DO NOT NOTCH OR DRILL TRUSS MEMBERS,

WHERE PRE-ENGINEERED ROOF TRUSSES ARE USED, TRUSS MANUFACTURER SHALL PROVIDE SHOP DRAWINGS, WHICH BEAR SEAL OF A N. C. REGISTERED ENGINEER.

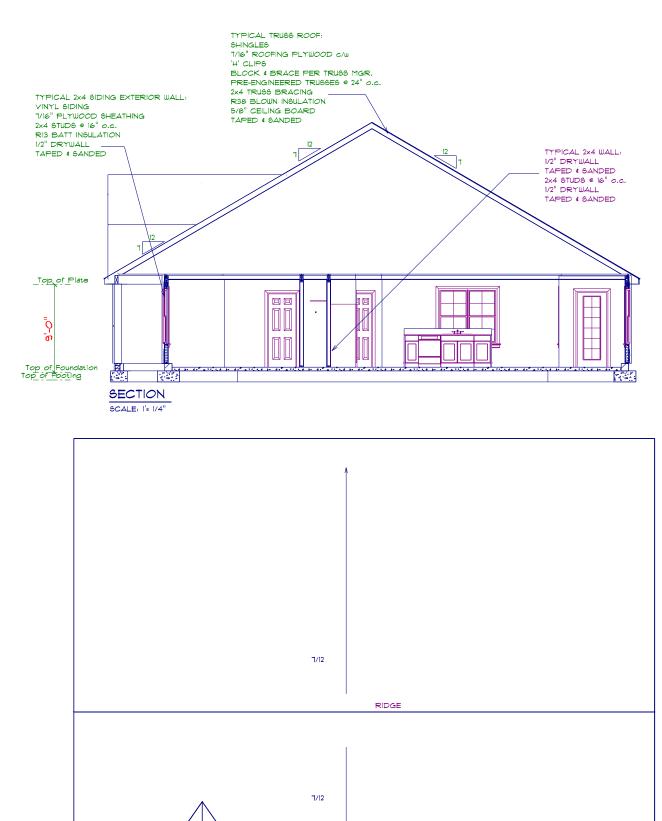

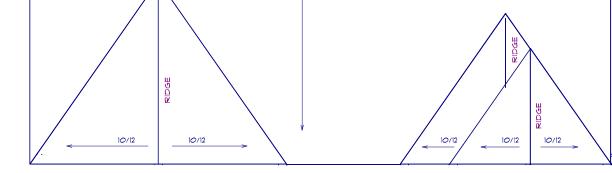

ROOF PLAN

SCALE: I'= 1/4"

12" OH ALL

DETAIL SHEET

DRD

HOMES

LAMCO

GARAGE


THE MAND!





DRD

LAMCO HOMES



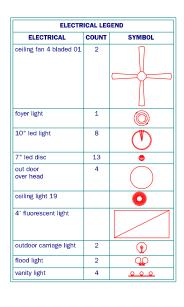

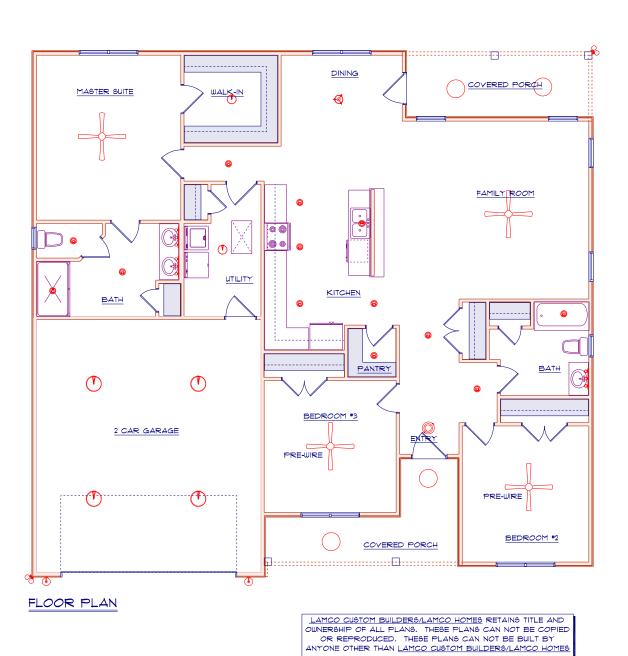

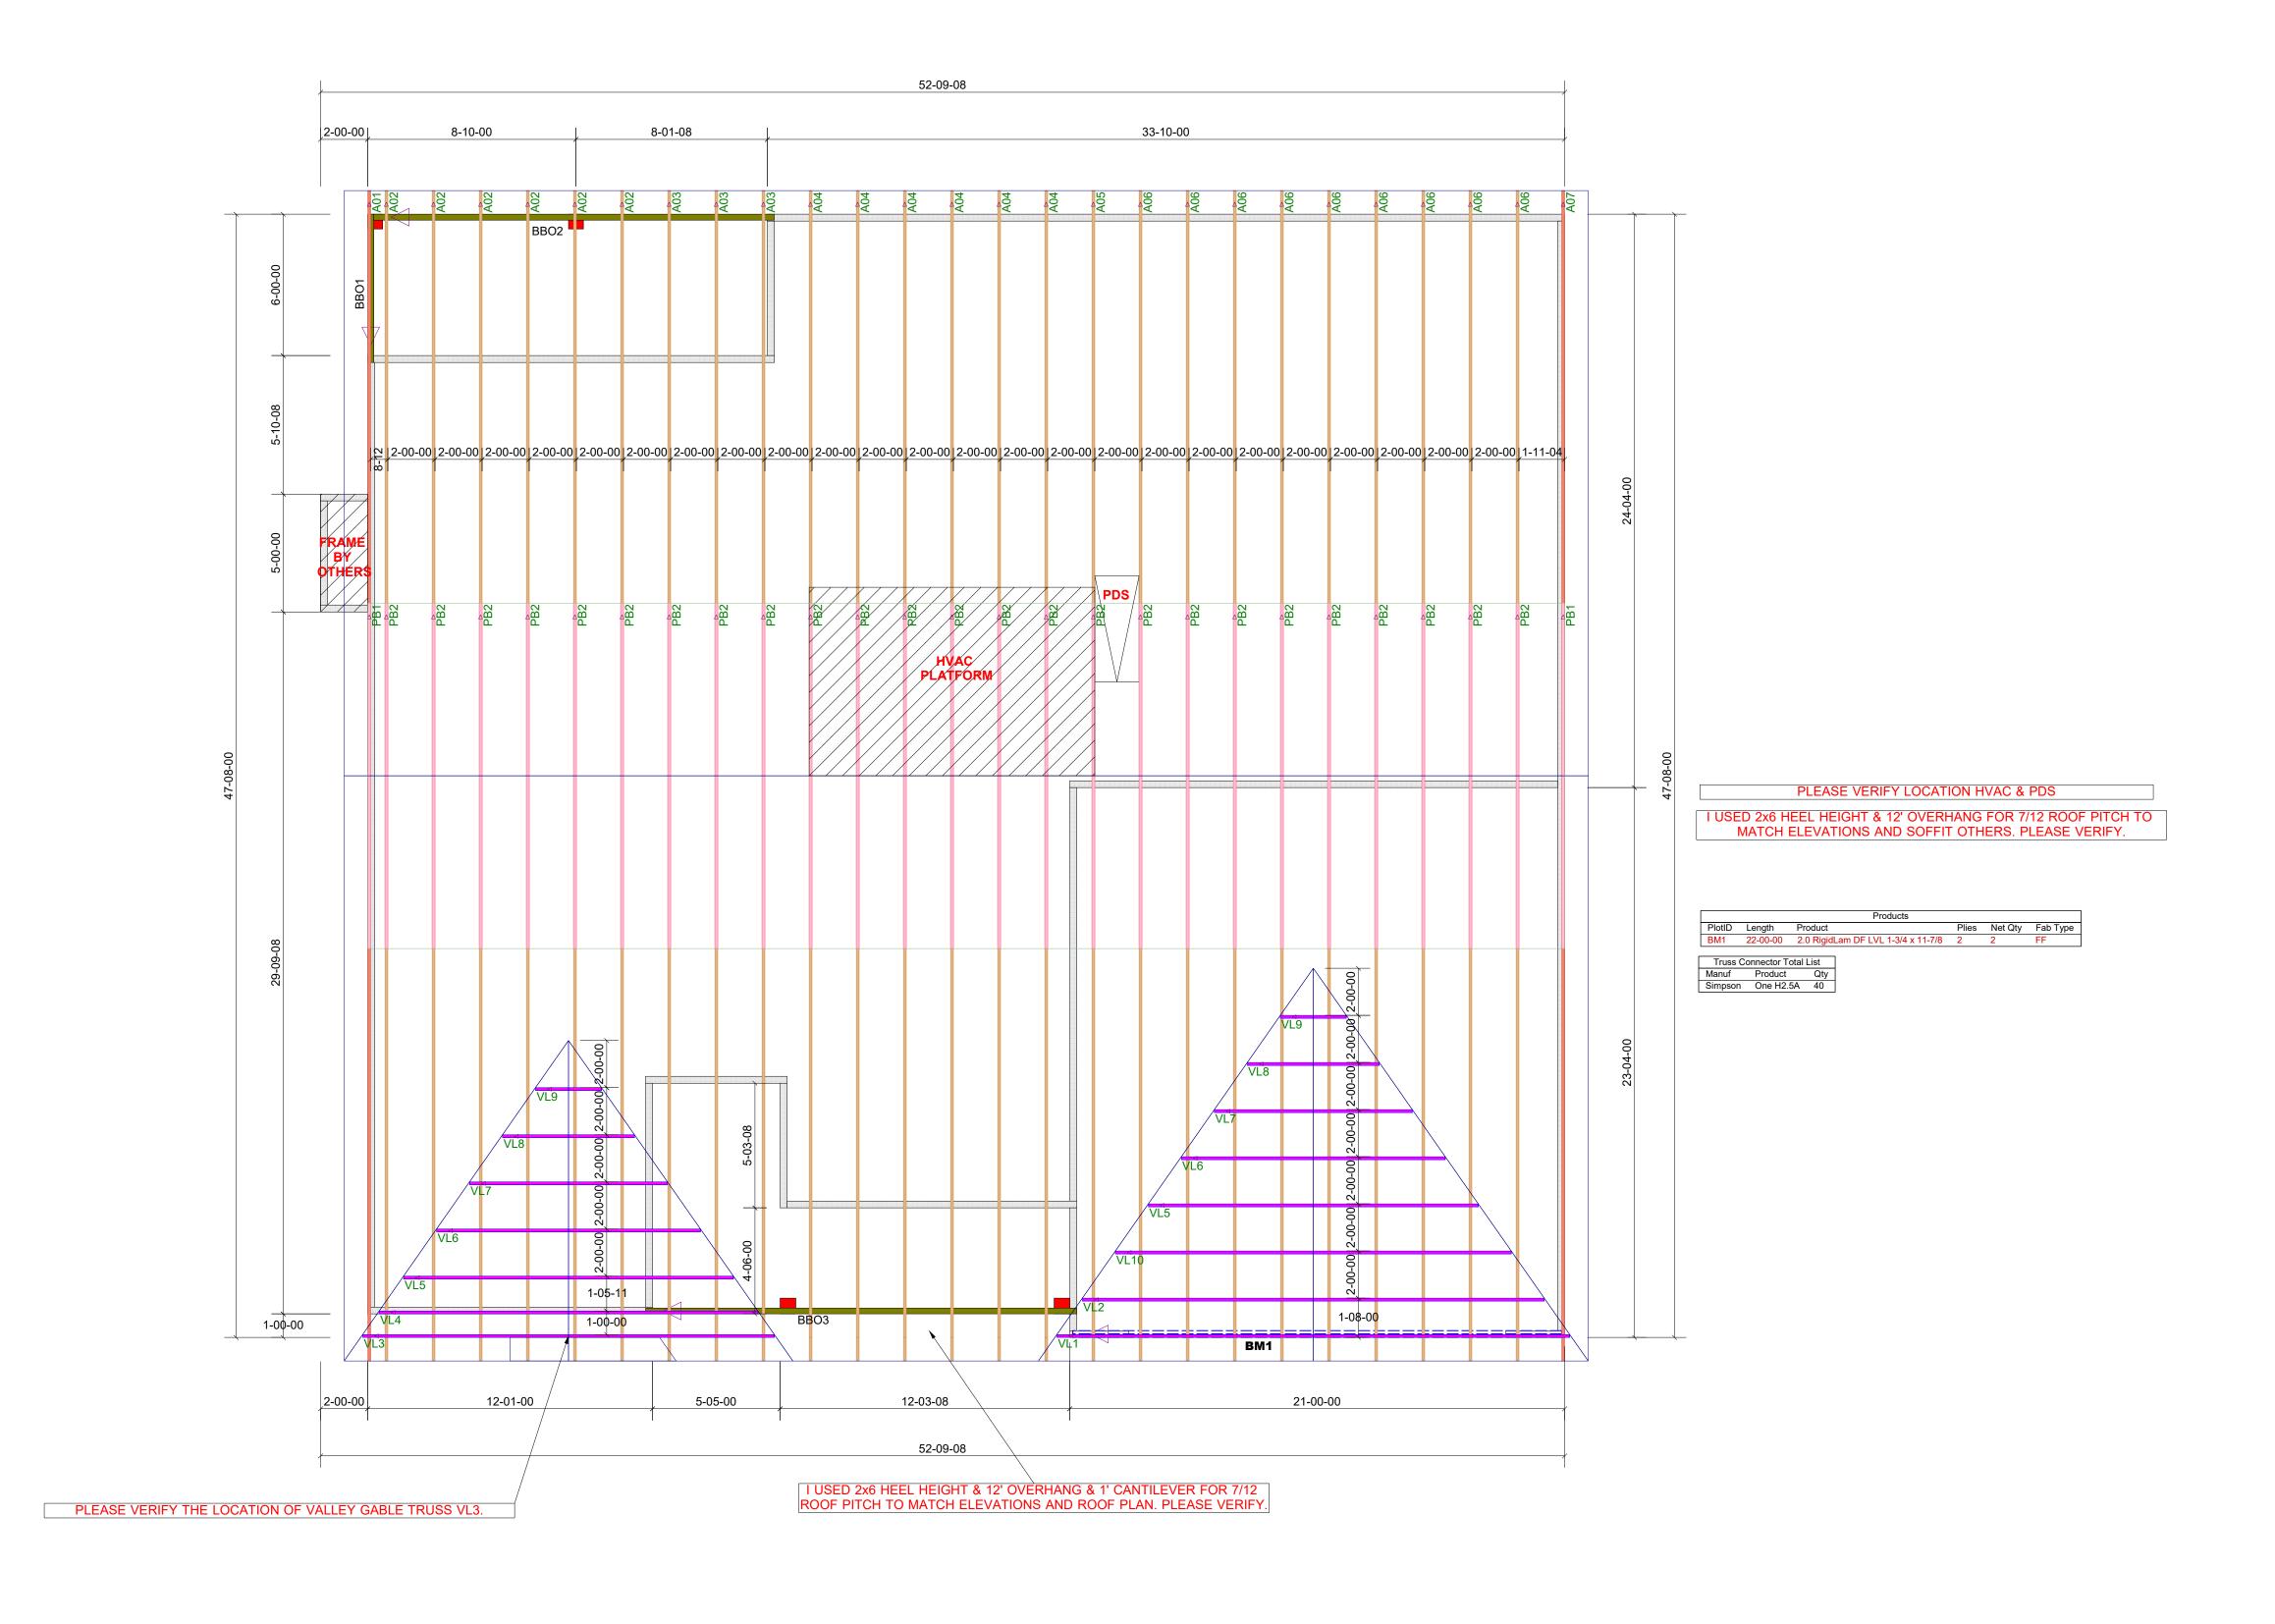



RUSS PLACEMENT PLAN

LAMCO

REVISIONS				
DATE	BY			
11-30-23	TH			

PROJECT NUMBER

23110135

SHEET NUMBER

ROOF TRUSS FRAMING
DRAWING SCALE : NTS