	Page 1 of
PROPERTY ID #: 🗲	Page 1 of
	Hacaett

SOIL/SITE EVALUATION for ON-SITE WASTEWATER SYSTEM

			gle Family Well	Shared Well	Spring Othe	er	WATER	SUPPLY	SETBACK:	
VAL	UATION METH	OD: Auge	r Boring Pit	Cut TY	PE OF WASTE	WATER:	Domestic	High	Strength	IPWW
P R O F			SOIL MORPHOLOGY		ОТНЕБ	R PROFIL	LE FACTORS			
L E #	.0502 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	.0503 STRUCTURE/ TEXTURE	.0503 CONSISTENCE/ MINERALOGY	.0504 SOIL WETNESS/ COLOR	.0505 SOIL DEPTH	.0506 SAPRO CLASS	.0507 RESTR HORIZ	.0509 PROFILE CLASS & LTAR*	.0503 SLOPE CORRE CTION
1,	2-3/. LS	0-20 20-44 44-48	SCL, 5BK CL "SEK	F1, N3, Np, SF F1, S5, NP, SE F1, S5, NP, SE	7.5/1.5/8 5/4 = 44°	48 W			.35	
2										
3										
4										
ailab stem	ESCRIPTION de Space (.0508) Type(s) AR am Trench Depth	25% R		SITE CLAS EVALUAT	SSIFICATION (ED BY:	0509): PS ITM				

LEGEND

LANDSCAPE POSITION	SOIL GROUP	SOIL TEXTURE	CONVENTIONAL LTAR (gpd/ft²)	SAPROLITE LTAR (gpd/ft²)	LPP LTAR (gpd/ft²)	MINERALOGY/ CONSISTENCE		STRUCTURE
CC (Concave slope)		S (Sand)		0.6 - 0.8		MOIST	WET	SG (Single grain)
CV (Convex Slope)	'	LS (Loamy sand)	0.8 - 1.2	0.5 -0.7	0.4 -0.6	Lo (Loose)	NS (Non-sticky)	M (Massive)
D (Drainage way)	п	SL (Sandy loam)	0.6 - 0.8	0.4 -0.6	0.3 - 0.4	VFR (Very friable)	SS (Slightly sticky)	GR (Granular)
FP (Flood plain)		L (Loam)		0.2 - 0.4		FR (Friable)	S (Sticky)	SBK (Subangular blocky)
FS (Foot slope)		SiL (Silt loam)		0.1 - 0.3	0.15 - 0.3	FI (Firm)	VS (Very sticky)	ABK (Angular blocky)
H (Head slope)		SCL (Sandy clay loam)		0.05 - 0.15**		VFI (Very firm)	NP (Non-plastic)	PR (Prismatic)
L (Linear Slope)	Ш	CL (Clay loam)		None		EFI (Extremely firm)	SP (Slightly plastic)	PL (Platy)
N (Nose slope)		SiCL (Silty clay loam)					P (Plastic)	
R (Ridge/summit)		Si (Silt)					VP (Very plastic)	
S (Shoulder slope)		SC (Sandy clay)	у)			SEXP (Slightly expansive)		
T (Terrace)	IV	SiC (Silty clay)	0.1 - 0.4		0.05 - 0.2	EXP (Expansive)		
TS (Toe Slope)		C (Clay)						
		O (Organic)	None					

HORIZON DEPTH

In inches below natural soil surface

DEPTH OF FILL


In inches from land surface Thickness and depth from land surface

RESTRICTIVE HORIZON SAPROLITE

S(suitable) or U(unsuitable); Evaluation of saprolite shall be by pits.

SOIL WETNESS

CLASSIFICATION

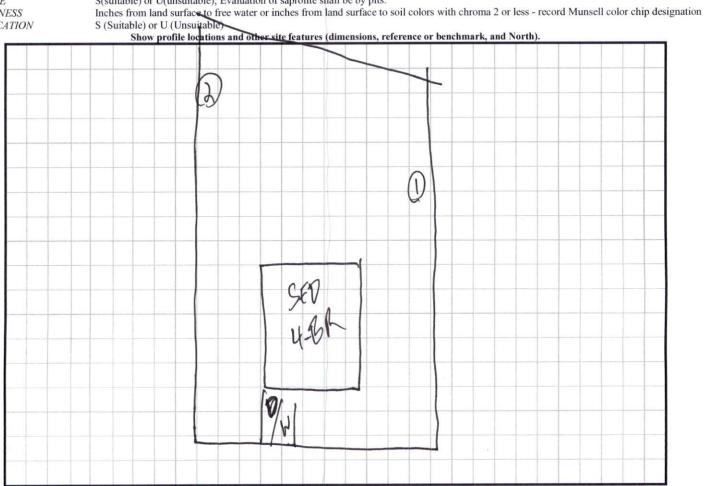

^{*} Adjust LTAR due to depth, consistence, structure, soil wetness, landscape, position, wastewater flow and quality.
**Sandy clay loam saprolite can only be used with advanced pretreatment in accordance with 15A NCAC 18E .1200.

