PROPERTY ID #: SFD 2401-0059
COUNTY: He-a 2 + 1

SOIL/SITE EVALUATION for ON-SITE WASTEWATER SYSTEM

WINER	C: WED NO	we THC			fields in full)		DAT	E EVALU	ATED: 2.	-14-29
ADDRE PROPOS LOCAT	SS: <u>81 E (</u> SED FACILITY ION OF SITE:	es le gre	5+ C+ F 50 × 70 PR	Cil(: ng) en OPOSED DESIGN	FLOW (.0400):	400	PROPE	ERTY SIZ	E: ORDED:	
VATER	SUPPLY:		gle Family Well			er			SETBACK:	
EVALU	ATION METH	OD: Auge	er Boring Pit	Cut TY	PE OF WASTE	WATER:	Domest	ic) High	Strength	IPWW
P R O F			SOIL MO	RPHOLOGY	OTHER PROFILE FACTORS					
L E #	.0502 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	.0503 STRUCTURE/ TEXTURE	.0503 CONSISTENCE/ MINERALOGY	.0504 SOIL WETNESS/ COLOR	.0505 SOIL DEPTH	.0506 SAPRO CLASS	.0507 RESTR HORIZ	.0509 PROFILE CLASS & LTAR*	.0503 SLOPE CORRE CTION
	2-3%	0-38	2,90	FGMS, MP, SE						
,	LS	38-40	SCL, SBK	Fr. SS, NP, ST	7.5/R 5/8	48"	i		-11	
1		40-48	CLUSER	Fr, 55, Jp, St	7/2=40"		·		-4	
	2-3:/. LS	0-10	51,91 St,56h	Fraguest		e:				
2	4	10-39	Sel, Son	Fr, \$ NP, SE	7.54R 38 7/2 537'	4811			.35	
		37-48	CL/PM MERK	FISINFISE	7/2 251					
3										
3					_					
					-					
									30.4	
4					-					
					-					

DESCRIPTION	INITIAL SYSTEM	REPAIR SYSTEM	
Available Space (.0508)			SITE CLASSIFICATION (.0509): 5
System Type(s)	25%. Red	25% Red	EVALUATED BY: RL/JM
Site LTAR	.35	. 35	OTHER(S) PRESENT:
Maximum Trench Depth	18"-24"	18"-24	

LEGEND

LANDSCAPE POSITION	THE RESIDENCE OF THE PERSON OF		CONVENTIONAL LTAR (gpd/ft²)	SAPROLITE LTAR (gpd/ft²)	LPP LTAR (gpd/ft²)	MINERALOGY/ CONSISTENCE		STRUCTURE
CC (Concave slope)		S (Sand)		0.6 - 0.8		MOIST	WET	SG (Single grain)
CV (Convex Slope)	1	LS (Loamy sand)	0.8 - 1.2	0.5 -0.7	0.4 -0.6	Lo (Loose)	NS (Non-sticky)	M (Massive)
D (Drainage way)	Ш	SL (Sandy loam)	0.6 - 0.8	0.4 -0.6	0.3 - 0.4	VFR (Very friable)	SS (Slightly sticky)	GR (Granular)
FP (Flood plain)		L (Loam)		0.2 - 0.4		FR (Friable)	S (Sticky)	SBK (Subangular blocky)
FS (Foot slope)		SiL (Silt loam)	0.3 - 0.6	0.1 - 0.3	0.15 - 0.3	FI (Firm)	VS (Very sticky)	ABK (Angular blocky)
H (Head slope)		SCL (Sandy clay loam)		0.05 - 0.15**		VFI (Very firm)	NP (Non-plastic)	PR (Prismatic)
L (Linear Slope)	III	CL (Clay loam)		None		EFI (Extremely firm)	SP (Slightly plastic)	PL (Platy)
N (Nose slope)		SiCL (Silty clay loam)					P (Plastic)	
R (Ridge/summit)		Si (Silt)					VP (Very plastic)	
S (Shoulder slope)	IV	SC (Sandy clay)	0.1 - 0.4		0.05 - 0.2	SEXP (Slightly expansive)		
T (Terrace)		SiC (Silty clay)				EXP (Expansive)		
TS (Toe Slope)		C (Clay)						
•		O (Organic)	None					

HORIZON DEPTH

In inches below natural soil surface

DEPTH OF FILL

In inches from land surface


RESTRICTIVE HORIZON **SAPROLITE**

Thickness and depth from land surface S(suitable) or U(unsuitable); Evaluation of saprolite shall be by pits.

SOIL WETNESS

Inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - record Munsell color chip designation

S (Suitable) or U (Unsuitable)

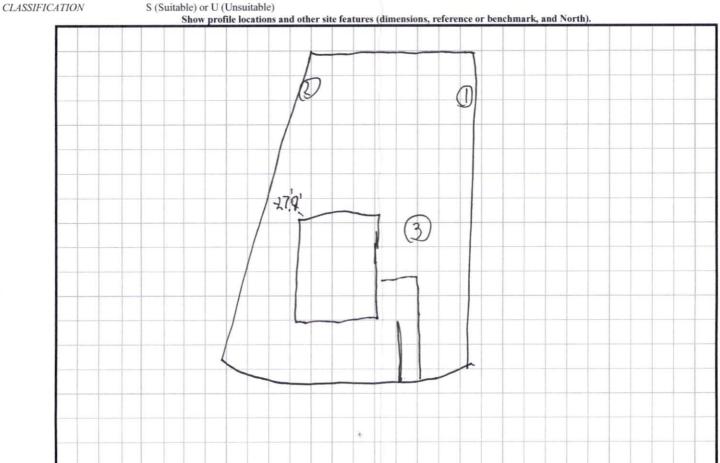

^{*} Adjust LTAR due to depth, consistence, structure, soil wetness, landscape, position, wastewater flow and quality.

**Sandy clay loam saprolite can only be used with advanced pretreatment in accordance with 15A NCAC 18E .1200.

