	Page 1 of
ROPERTY ID #:	STD 2401-0091
COUNTY:	Haraett

SOIL/SITE EVALUATION for ON-SITE WASTEWATER SYSTEM
(Complete all fields in full)

LOCA	TION OF SITE:		C. L. Ilingto, 0 70 PR	OPOSED DESIGN	FLOW (.0400):	4 <i>80</i>	PROPE	ERTY SIZE		3.24
	UATION METH		er Boring Pit		PE OF WASTE		Domest		_	IPWW
P R O F I			SOIL MORPHOLOGY		отне	R PROFII	E FACTORS			
L E	.0502 LANDSCAPE POSITION/ SLOPE %	HORIZON DEPTH (IN.)	.0503 STRUCTURE/ TEXTURE	.0503 CONSISTENCE/ MINERALOGY	.0504 SOIL WETNESS/ COLOR	.0505 SOIL DEPTH	.0506 SAPRO CLASS	.0507 RESTR HORIZ	.0509 PROFILE CLASS & LTAR*	.0503 SLOPE CORRE CTION
1	2-3%. LS	0-10 10-38 38-RXB	SCL SBK	FG SS, NOSE FG SS, NOSE FG, SGNOSE		38"		ROCKS 38	,35	
<b>2</b> , 3	3-4 LS	0-12 12-36 36 48	SCL, SEK CL/ SEK	FYNS, NPSE FYNS, NPSE FYNS, NPSE	7.5/R FS 11 <b>2</b> = 3 <b>5</b> (1	48"			,35	
3										
4										
DESCRIPTION INITIAL SYSTEM REPAIR SYSTEM										

Available Space (.0508)			SITE CLASSIFICATION (.0509): 3
System Type(s)	25% Red	25% Red	EVALUATED BY: RLJSM
Site LTAR	.35	.35	OTHER(S) PRESENT:/
Maximum Trench Depth	24"	2411	
Comments:			

Available Space (.0508)

## **LEGEND**

LANDSCAPE POSITION	SOIL GROUP	SOIL TEXTURE	CONVENTIONAL LTAR (gpd/ft²)	SAPROLITE LTAR (gpd/ft²)	LPP LTAR (gpd/ft²)	MINERALOGY/ CONSISTENCE		STRUCTURE
CC (Concave slope)		S (Sand)	0.8 - 1.2	0.6 - 0.8	0.4 -0.6	MOIST	WET	SG (Single grain)
CV (Convex Slope)	1	LS (Loamy sand)		0.5 -0.7		Lo (Loose)	NS (Non-sticky)	M (Massive)
D (Drainage way)		SL (Sandy loam)	0.6 - 0.8	0.4 -0.6	0.3 - 0.4	VFR (Very friable)	SS (Slightly sticky)	GR (Granular)
FP (Flood plain)		L (Loam)		0.2 - 0.4		FR (Friable)	S (Sticky)	SBK (Subangular blocky)
FS (Foot slope)		SiL (Silt loam)		0.1 - 0.3		FI (Firm)	VS (Very sticky)	ABK (Angular blocky)
H (Head slope)		SCL (Sandy clay loam)	0.3 - 0.6	0.05 - 0.15**	0.15 - 0.3	VFI (Very firm)	NP (Non-plastic)	PR (Prismatic)
L (Linear Slope)	III	CL (Clay loam)				EFI (Extremely firm)	SP (Slightly plastic)	PL (Platy)
N (Nose slope)		SiCL (Silty clay loam)				P (Plastic)		
R (Ridge/summit)		Si (Silt)		None			VP (Very plastic)	
S (Shoulder slope)	IV	SC (Sandy clay)			0.05 - 0.2	SEXP (Slightly expansive)		
T (Terrace)		SiC (Silty clay)	0.1 - 0.4			EXP (Expansive)		
TS (Toe Slope)		C (Clay)						•
		O (Organic)	None					

DEPTH OF FILL

In inches from land surface


RESTRICTIVE HORIZON

Thickness and depth from land surface

SAPROLITE

S(suitable) or U(unsuitable); Evaluation of saprolite shall be by pits.

Inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - record Munsell color chip designation SOIL WETNESS CLASSIFICATION S (Suitable) or U (Unsuitable) Show profile locations and other site features (dimensions, reference or benchmark, and North).

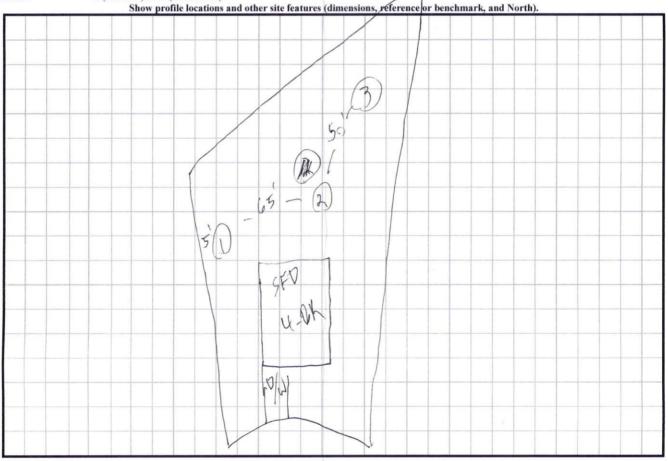

<sup>\*</sup> Adjust LTAR due to depth, consistence, structure, soil wetness, landscape, position, wastewater flow and quality.
\*\*Sandy clay loam saprolite can only be used with advanced pretreatment in accordance with 15A NCAC 18E .1200. HORIZON DEPTH In inches below natural soil surface

