

Trenco
818 Soundside Rd
Edenton, NC 27932

Re: J0124-0288
Weaver Homes/Lot 9 West Pointe III

The truss drawing(s) referenced below have been prepared by Truss Engineering Co. under my direct supervision based on the parameters provided by Comtech, Inc - Fayetteville.

Pages or sheets covered by this seal: I63532519 thru I63532541

My license renewal date for the state of North Carolina is December 31, 2024.

North Carolina COA: C-0844



February 9, 2024

Gilbert, Eric


IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

Job J0124-0288	Truss A1	Truss Type PIGGYBACK BASE	Qty 1	Ply 1	Weaver Homes/Lot 9 West Pointe III	163532519
-------------------	-------------	------------------------------	----------	----------	------------------------------------	-----------


Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:25 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrcDoi7J4zJC?f



Scale = 1:81.2

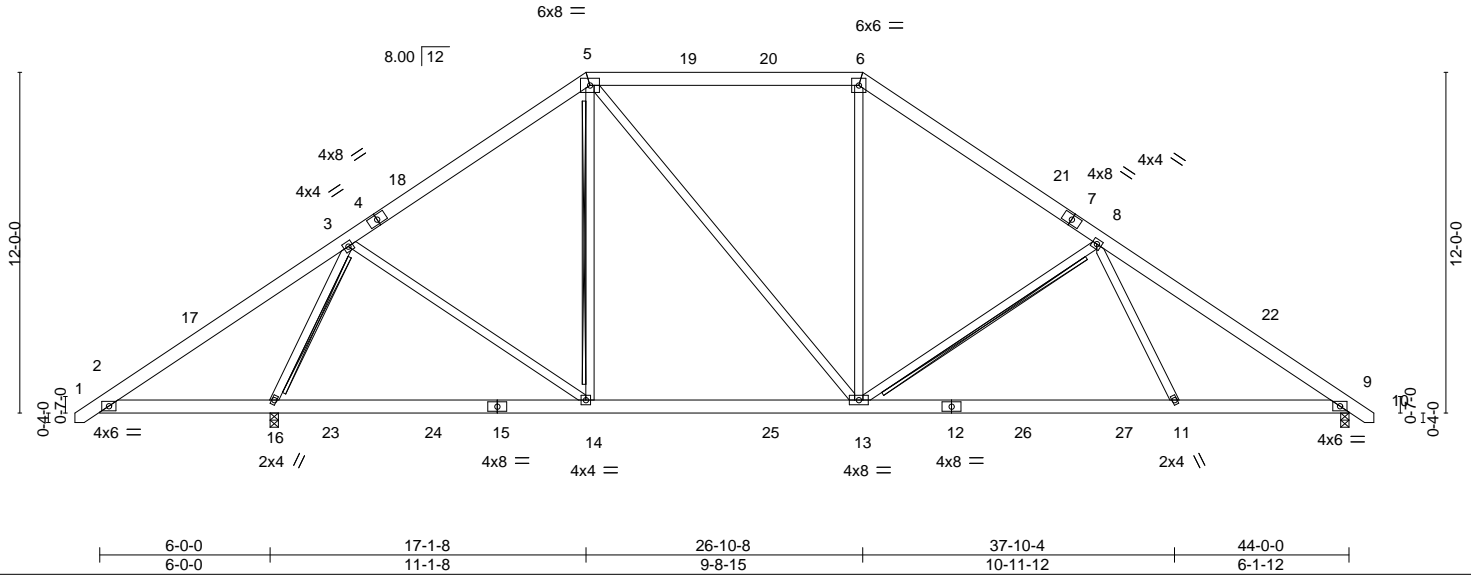

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.50	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.15	BC 0.50	Vert(LL) -0.12 11-13 >999 360		
BCLL 0.0 *	Lumber DOL 1.15	WB 0.51	Vert(CT) -0.24 11-13 >999 240		
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.04 9 n/a n/a		
	Code IRC2015/TPI2014		Wind(LL) 0.04 13-14 >999 240	Weight: 330 lb	FT = 20%


LUMBER-
 TOP CHORD 2x6 SP No.1
 BOT CHORD 2x6 SP No.1
 WEBS 2x4 SP No.2

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 4-8-11 oc purlins, except
 2-0-0 oc purlins (5-11-3 max.): 5-6.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
 6-0-0 oc bracing: 2-16.
 WEBS T-Brace: 2x4 SPF No.2 - 5-14, 8-13, 3-16
 Fasten (2X) T and I braces to narrow edge of web with 10d (0.131"x3") nails, 6in o.c., with 3in minimum end distance.
 Brace must cover 90% of web length.

REACTIONS. (size) 16=0-3-8, 9=0-3-8
 Max Horz 16=286(LC 11)
 Max Uplift 16=-96(LC 12), 9=-86(LC 13)
 Max Grav 16=2183(LC 2), 9=1622(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-429/633, 3-5=-1461/373, 5-6=-1321/451, 6-8=-1708/458, 8-9=-2514/415
 BOT CHORD 2-16=-423/468, 14-16=-191/710, 13-14=-45/1170, 11-13=-238/1792, 9-11=-191/1956
 WEBS 3-14=-65/730, 5-13=-133/429, 6-13=0/490, 8-13=-742/311, 8-11=0/444, 3-16=-2008/762

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-8-9 to 3-8-4, Interior(1) 3-8-4 to 17-2-6, Exterior(2) 17-2-6 to 23-5-0, Interior(1) 23-5-0 to 26-9-10, Exterior(2) 26-9-10 to 33-0-5, Interior(1) 33-0-5 to 44-8-9 zone; cantilever left exposed ;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 96 lb uplift at joint 16 and 86 lb uplift at joint 9.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - Warning: Additional permanent and stability bracing for truss system (not part of this component design) is always required.

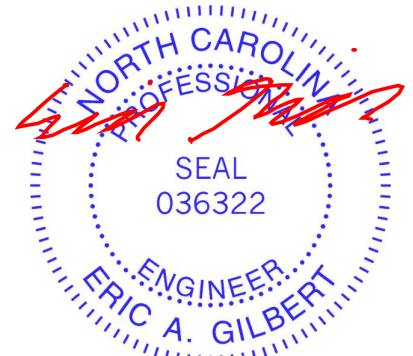

February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
 Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
 Edenton, NC 27932

Job J0124-0288	Truss A2	Truss Type PIGGYBACK BASE	Qty 5	Ply 1	Weaver Homes/Lot 9 West Pointe III 163532521
-------------------	-------------	------------------------------	----------	----------	---

Comtech, Inc. Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:29 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f



Scale = 1:81.8

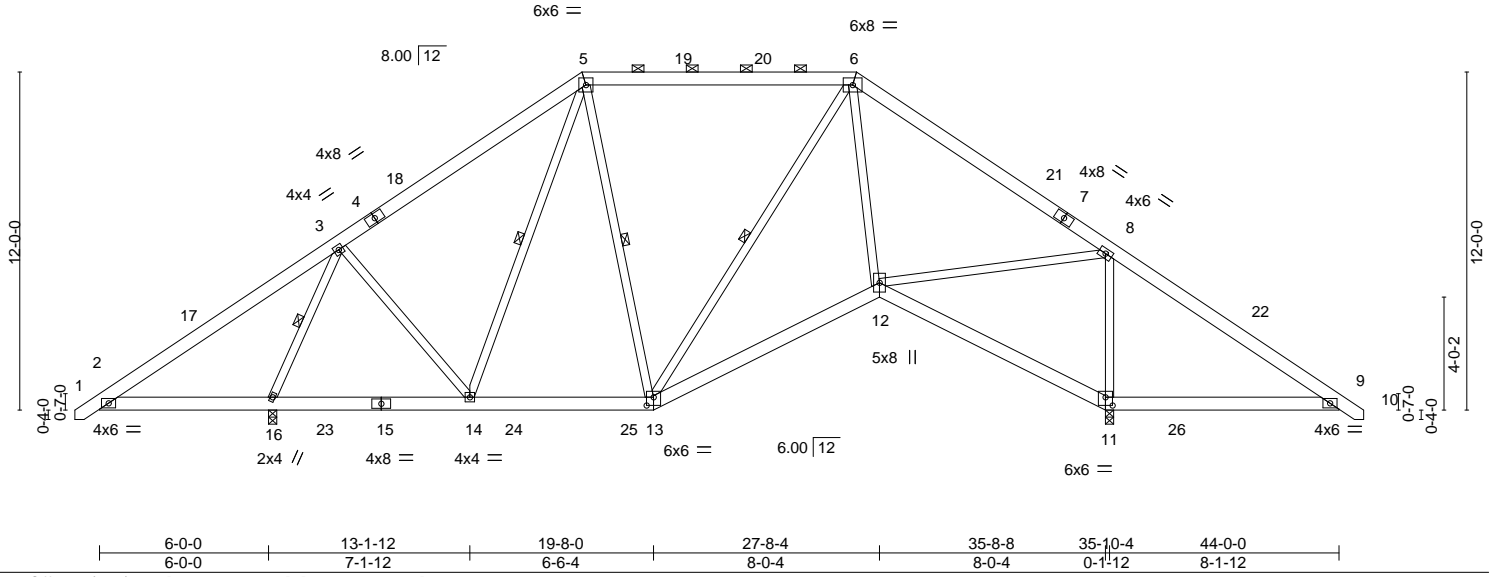


Plate Offsets (X,Y)--	[11:0-3-0,0-3-8], [13:0-3-0,0-3-8]
-----------------------	------------------------------------

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.15	TC 0.46	Vert(LL)	-0.04 12-13	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL	1.15	BC 0.22	Vert(CT)	-0.10 12-13	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.75	Horz(CT)	0.03 11	n/a	n/a		
BCDL 10.0	Code IRC2015/TP12014		Matrix-S	Wind(LL)	-0.02 11-12	>999	240	Weight: 336 lb	FT = 20%

LUMBER-
 TOP CHORD 2x6 SP No.1
 BOT CHORD 2x6 SP No.1
 WEBS 2x4 SP No.2

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except 2-0-0 oc purlins (6-0-0 max.): 5-6.
 BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
 WEBS 1 Row at midpt 5-14, 3-16, 5-13, 6-13

REACTIONS. (size) 11=0-3-8, 16=0-3-8
 Max Horz 16=-286(LC 10)
 Max Uplift 11=-109(LC 13), 16=-104(LC 12)
 Max Grav 11=1939(LC 1), 16=1667(LC 23)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-399/643, 3-5=-806/204, 5-6=-661/248, 6-8=-916/46, 8-9=-465/701
 BOT CHORD 2-16=-431/441, 14-16=-213/469, 13-14=-100/663, 12-13=-53/849, 11-12=-588/587,
 9-11=-461/491
 WEBS 3-14=-38/482, 8-12=-69/1128, 8-11=-1512/479, 3-16=-1590/568, 6-12=-116/562,
 6-13=-296/79

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) -0-8-9 to 3-8-4, Interior(1) 3-8-4 to 17-2-6, Exterior(2) 17-2-6 to 23-5-0, Interior(1) 23-5-0 to 26-9-10, Exterior(2) 26-9-10 to 33-0-5, Interior(1) 33-0-5 to 44-8-9 zone; cantilever left and right exposed ;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 109 lb uplift at joint 11 and 104 lb uplift at joint 16.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
 Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
 Edenton, NC 27932

Job J0124-0288	Truss A3	Truss Type PIGGYBACK BASE	Qty 2	Ply 1	Weaver Homes/Lot 9 West Pointe III 163532522
-------------------	-------------	------------------------------	----------	----------	---

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:30 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f



Scale = 1:81.5

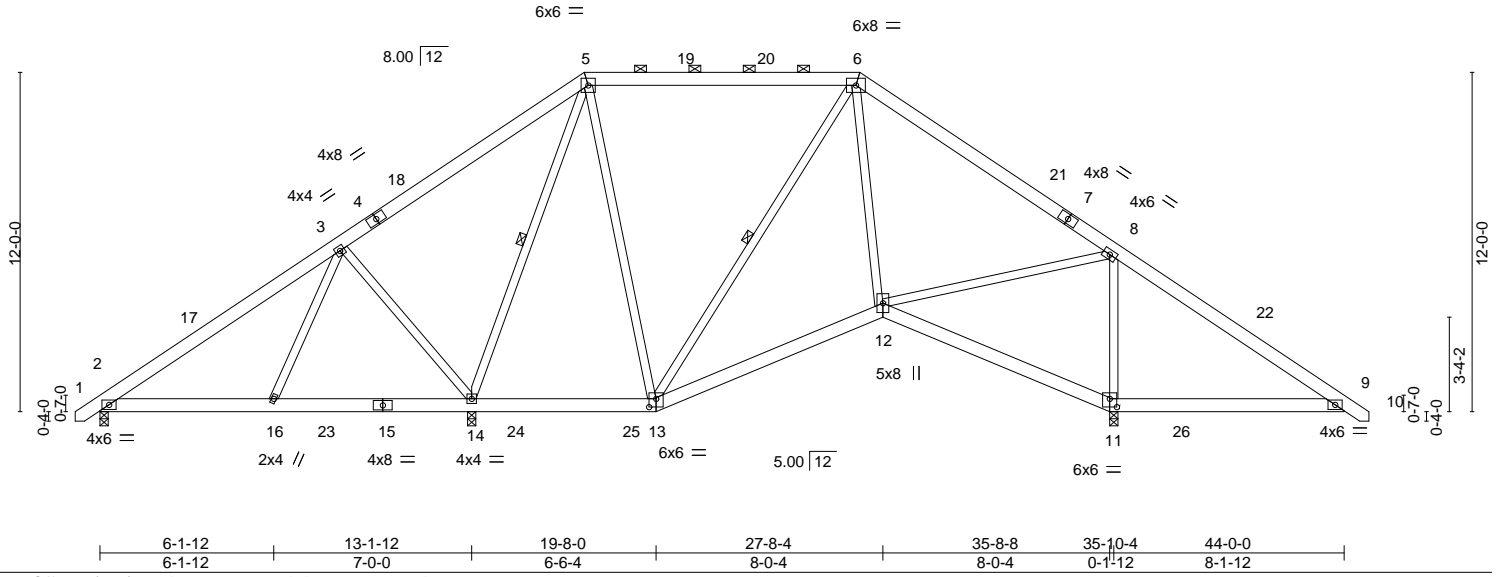


Plate Offsets (X,Y)-- [11:0-3-0,0-3-8], [13:0-3-0,0-3-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.15	TC 0.45	Vert(LL)	-0.04 12-13	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL	1.15	BC 0.20	Vert(CT)	-0.09 12-13	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.66	Horz(CT)	0.02 11	n/a	n/a		
BCDL 10.0	Code IRC2015/TP12014		Matrix-S	Wind(LL)	0.02 2-16	>999	240		
								Weight: 336 lb	FT = 20%

LUMBER-
TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
WEBS 2x4 SP No.2

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except 2-0-0 oc purlins (6-0-0 max.): 5-6.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
WEBS 1 Row at midpt 5-14, 6-13

REACTIONS. (size) 2=0-3-8, 11=0-3-8, 14=0-3-8
Max Horz 2=-286(LC 10)
Max Uplift 2=-56(LC 8), 11=-126(LC 13), 14=-229(LC 9)
Max Grav 2=549(LC 23), 11=1716(LC 1), 14=1428(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-583/281, 3-5=-137/260, 5-6=-372/181, 6-8=-569/36, 8-9=-465/701
BOT CHORD 2-16=-196/409, 14-16=-156/367, 13-14=-114/283, 12-13=-86/496, 11-12=-561/565,
9-11=-461/490
WEBS 3-14=-668/501, 5-14=-828/187, 8-12=-44/844, 8-11=-1332/462, 6-12=-173/499,
5-13=0/298, 3-16=-268/309

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) -0-8-9 to 3-8-4, Interior(1) 3-8-4 to 17-2-6, Exterior(2) 17-2-6 to 23-5-0, Interior(1) 23-5-0 to 26-9-10, Exterior(2) 26-9-10 to 33-0-5, Interior(1) 33-0-5 to 44-8-9 zone; cantilever right exposed; porch left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 56 lb uplift at joint 2, 126 lb uplift at joint 11 and 229 lb uplift at joint 14.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
Edenton, NC 27932

Job J0124-0288	Truss A4	Truss Type COMMON	Qty 2	Ply 1	Weaver Homes/Lot 9 West Pointe III I63532523
-------------------	-------------	----------------------	----------	----------	---

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:31 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrcDoi7J4zJC?f

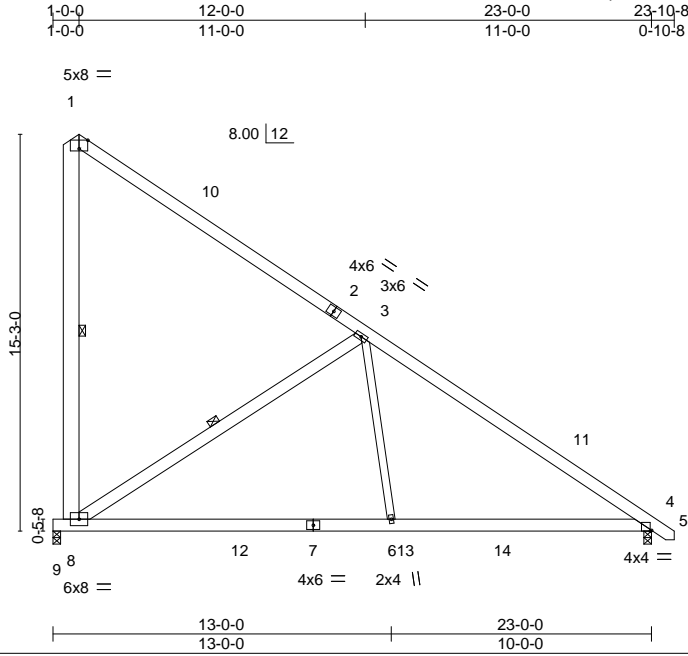

Scale = 1:88.5

Plate Offsets (X,Y)-- [1:0-4-0,Edge], [4:0-0-10,Edge]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.56	Vert(LL) -0.22	6-8	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.62	Vert(CT) -0.40	6-8	>680	240		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.58	Horz(CT) 0.02	4	n/a	n/a		
BCDL 10.0	Code IRC2015/TP12014	Matrix-S	Wind(LL) 0.05	6-8	>999	240	Weight: 205 lb	FT = 20%


LUMBER-
TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
WEBS 2x6 SP No.1 *Except*
1-8: 2x8 SP No.1, 3-6: 2x4 SP No.2

BRACING-
TOP CHORD Structural wood sheathing directly applied or 5-10-12 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 9-1-6 oc bracing.
WEBS 1 Row at midpt 1-8, 3-8

REACTIONS. (size) 9=0-3-8, 4=0-3-8
Max Horz 9=-497(LC 13)
Max Uplift 9=-246(LC 13)
Max Grav 9=1141(LC 20), 4=1135(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-280/136, 3-4=-1489/0, 1-8=-318/224
BOT CHORD 8-9=-561/594, 6-8=0/987, 4-6=0/1087
WEBS 3-8=-1313/388, 3-6=0/794

- NOTES-**
- 1) Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-8-6 to 5-1-3, Interior(1) 5-1-3 to 23-8-9 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 3) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 246 lb uplift at joint 9.

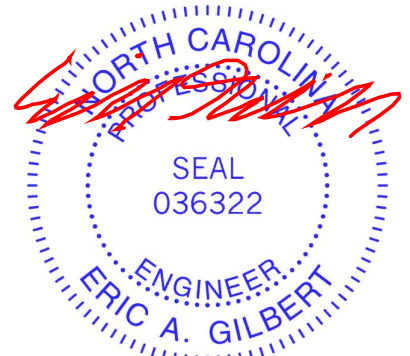

February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPH Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
Edenton, NC 27932

Job J0124-0288	Truss A5	Truss Type COMMON	Qty 1	Ply 1	Weaver Homes/Lot 9 West Pointe III Job Reference (optional)	I63532524
-------------------	-------------	----------------------	----------	----------	--	-----------

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:33 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f



Scale = 1:93.9

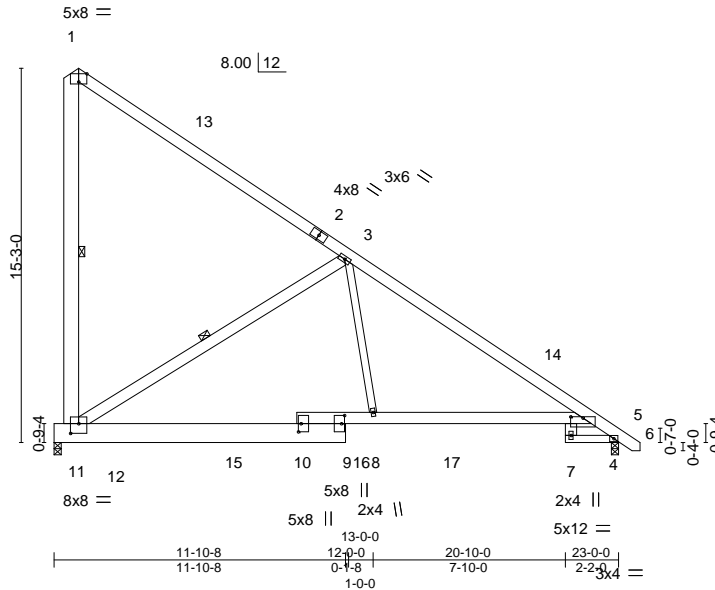


Plate Offsets (X,Y)-- [1:0-4-0,Edge], [4:0-6-0,0-0-10], [9:0-4-0,0-1-8], [10:0-4-0,0-1-4], [11:0-4-0,0-4-12]


LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.62	Vert(LL) -0.14	7	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.55	Vert(CT) -0.27	7	>999	240		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.61	Horz(CT) 0.14	5	n/a	n/a		
BCDL 10.0	Code IRC2015/TP12014	Matrix-S	Wind(LL) 0.09	7	>999	240		
							Weight: 228 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x6 SP No.1	TOP CHORD Structural wood sheathing directly applied or 5-3-13 oc purlins, except end verticals.
BOT CHORD 2x6 SP No.1 *Except* 9-12: 2x10 SP No.1, 5-7: 2x4 SP No.1	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 5-7.
WEBS 2x6 SP No.1 *Except* 1-11: 2x8 SP No.1, 3-8: 2x4 SP No.2	WEBS 1 Row at midpt 1-11, 3-11

REACTIONS. (size) 12=0-3-8, 5=0-3-8
 Max Horz 12=-498(LC 13)
 Max Uplift 12=-242(LC 13)
 Max Grav 12=1123(LC 20), 5=1113(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-3=-259/155, 3-4=-1494/0, 4-5=-710/26, 1-11=-326/229
 BOT CHORD 11-12=-561/593, 8-11=0/1111, 4-8=0/1164
 WEBS 3-11=-1407/356, 3-8=0/778

- NOTES-**
- 1) Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-8-6 to 5-1-3, Interior(1) 5-1-3 to 23-8-9 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 3) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 242 lb uplift at joint 12.

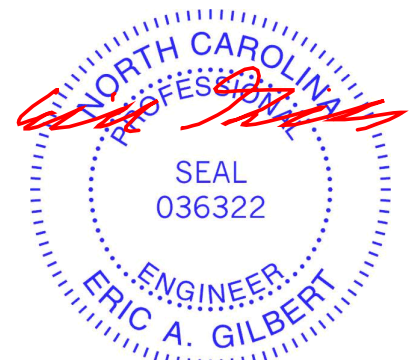

February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
 Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPH Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)



Job J0124-0288	Truss A6	Truss Type COMMON	Qty 1	Ply 2	Weaver Homes/Lot 9 West Pointe III I63532525
-------------------	-------------	----------------------	----------	----------	---

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:34 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

1-0-0 12-0-0 23-0-0 23-10-8
1-0-0 11-0-0 11-0-0 0-10-8

Scale = 1:93.9

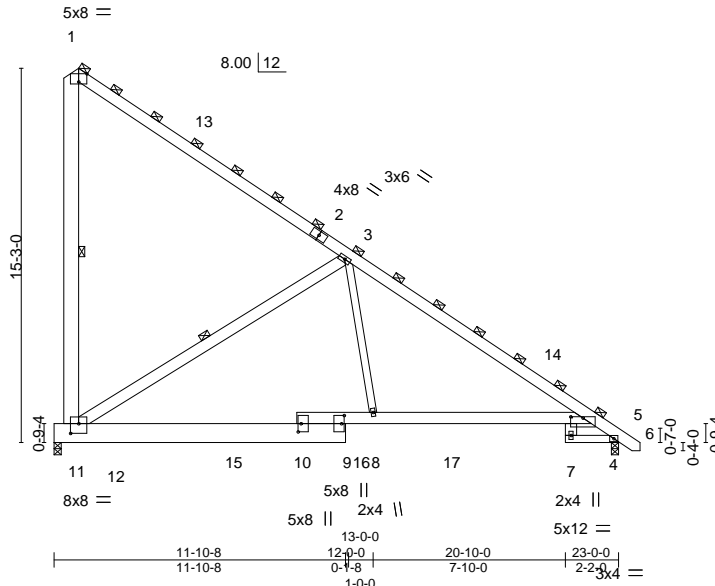


Plate Offsets (X,Y)-- [1:0-4-0,Edge], [4:0-6-0,0-0-10], [9:0-4-0,0-1-5], [10:0-4-0,0-1-6], [11:0-4-0,0-4-12]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.72	Vert(LL) -0.14	7	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.60	Vert(CT) -0.27	7	>999	240		
BCLL 0.0 *	Rep Stress Incr NO	WB 0.27	Horz(CT) 0.14	5	n/a	n/a		
BCDL 10.0	Code IRC2015/TP12014	Matrix-S	Wind(LL) 0.09	7	>999	240		
							Weight: 455 lb	FT = 20%

LUMBER-
TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1 *Except*
9-12: 2x10 SP No.1, 5-7: 2x4 SP No.1
WEBS 2x6 SP No.1 *Except*
1-11: 2x8 SP No.1, 3-8: 2x4 SP No.2

REACTIONS. (size) 12=0-3-8, 5=0-3-8
Max Horz 12=-996(LC 13)
Max Uplift 12=-484(LC 13)
Max Grav 12=2245(LC 20), 5=2226(LC 20)

BRACING-
TOP CHORD 2-0-0 oc purlins (6-0-0 max.), except end verticals
(Switched from sheeted: Spacing > 2-8-0).
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
6-0-0 oc bracing: 5-7.
WEBS 1 Row at midpt 1-11, 3-11

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-518/310, 3-4=-2988/0, 4-5=-1419/52, 1-11=-652/457
BOT CHORD 11-12=-1122/1185, 8-11=0/2221, 4-8=0/2329
WEBS 3-11=-2814/711, 3-8=0/1557

- NOTES-**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x8 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Webs connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-8-6 to 5-1-3, Interior(1) 5-1-3 to 23-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 484 lb uplift at joint 12.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)



818 Soundside Road
Edenton, NC 27932

Job J0124-0288	Truss A7	Truss Type COMMON	Qty 1	Ply 2	Weaver Homes/Lot 9 West Pointe III I63532526
-------------------	-------------	----------------------	----------	----------	---

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:35 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

1-0-0 12-0-0 23-0-0 23-10-8
1-0-0 11-0-0 11-0-0 0-10-8

Scale = 1:93.9

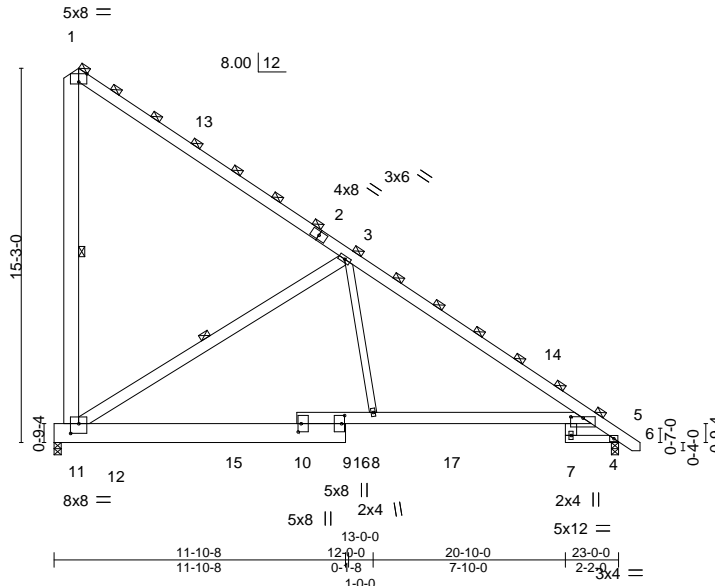


Plate Offsets (X,Y)-- [1:0-4-0,Edge], [4:0-6-0,0-0-10], [9:0-4-0,0-1-8], [10:0-4-0,0-1-7], [11:0-4-0,0-4-12]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.72	Vert(LL) -0.14	7	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.60	Vert(CT) -0.27	7	>999	240		
BCLL 0.0 *	Rep Stress Incr NO	WB 0.27	Horz(CT) 0.14	5	n/a	n/a		
BCDL 10.0	Code IRC2015/TP12014	Matrix-S	Wind(LL) 0.09	7	>999	240		
							Weight: 455 lb	FT = 20%


LUMBER-
TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1 *Except*
9-12: 2x10 SP No.1, 5-7: 2x4 SP No.1
WEBS 2x6 SP No.1 *Except*
1-11: 2x8 SP No.1, 3-8: 2x4 SP No.2

BRACING-
TOP CHORD 2-0-0 oc purlins (6-0-0 max.), except end verticals
(Switched from sheeted: Spacing > 2-8-0).
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
6-0-0 oc bracing: 5-7.
WEBS 1 Row at midpt 1-11, 3-11

REACTIONS. (size) 12=0-3-8, 5=0-3-8
Max Horz 12=-996(LC 13)
Max Uplift 12=-484(LC 13)
Max Grav 12=2245(LC 20), 5=2226(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-518/310, 3-4=-2988/0, 4-5=-1419/52, 1-11=-652/457
BOT CHORD 11-12=-1122/1185, 8-11=0/2221, 4-8=0/2329
WEBS 3-11=-2814/711, 3-8=0/1557

- NOTES-**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x8 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Webs connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-8-6 to 5-1-3, Interior(1) 5-1-3 to 23-8-9 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 484 lb uplift at joint 12.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

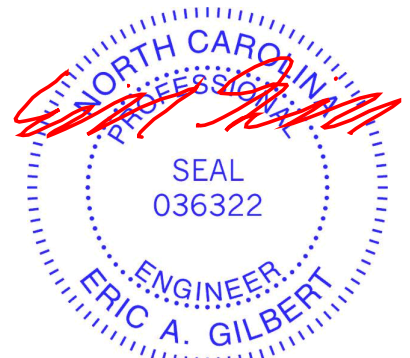

February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
Edenton, NC 27932

Job J0124-0288	Truss A8	Truss Type ROOF TRUSS	Qty 1	Ply 2	Weaver Homes/Lot 9 West Pointe III 163532527
-------------------	-------------	--------------------------	----------	----------	---

Comtech, Inc. Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:36 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

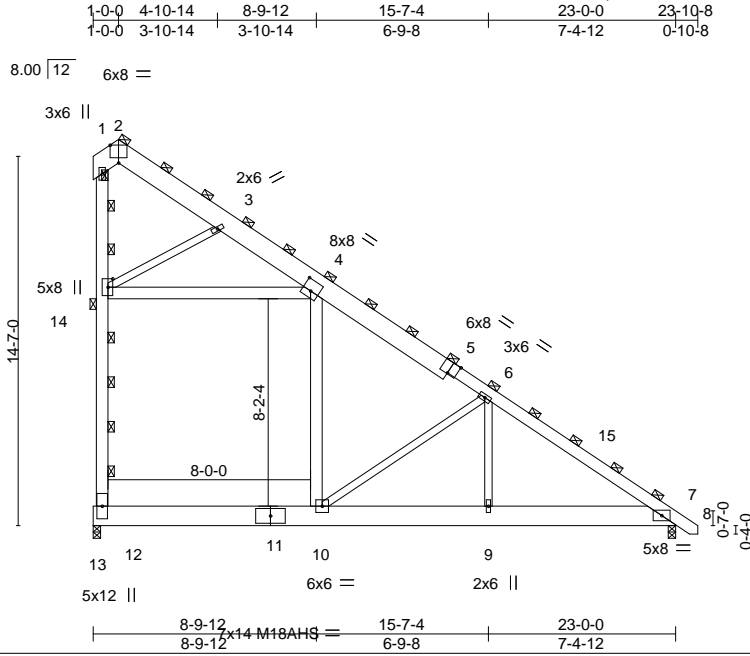

Scale = 1:91.0

Plate Offsets (X,Y)-- [2:0-4-0,Edge], [4:0-4-0,0-5-0], [5:0-4-0,Edge], [14:0-4-0,0-2-4]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.96	Vert(LL) -0.27	10	>984	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.82	Vert(CT) -0.60	10	>454	240	M18AHS	186/179
BCLL 0.0 *	Rep Stress Incr NO	WB 0.63	Horz(CT) 0.01	7	n/a	n/a		
BCDL 10.0	Code IRC2015/TP12014	Matrix-S	Wind(LL) 0.23	9-10	>999	240		
							Weight: 564 lb	FT = 20%

LUMBER-
TOP CHORD 2x10 SP No.1 *Except*
5-8: 2x6 SP No.1
BOT CHORD 2x10 SP No.1
WEBS 2x4 SP No.2 *Except*
4-10,4-14: 2x6 SP No.1
OTHERS 2x6 SP 2400F 2.0E

BRACING-
TOP CHORD 2-0-0 oc purlins (6-0-0 max.)
(Switched from sheeted: Spacing > 2-8-0).
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
JOINTS 1 Brace at Jt(s): 2, 1, 14

REACTIONS. (size) 12=0-3-8, 7=0-3-8
Max Horz 12=-831(LC 13)
Max Uplift 12=-12(LC 13)
Max Grav 12=2979(LC 21), 7=1926(LC 21)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=0/327, 2-3=-95/457, 3-4=-1061/123, 4-6=-1151/162, 6-7=-2953/132,
12-14=-1489/169
BOT CHORD 10-12=-96/820, 9-10=0/2299, 7-9=0/2299
WEBS 4-10=0/944, 6-10=-2609/392, 6-9=0/1143, 4-14=-232/1267, 3-14=-2514/285

- NOTES-**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-4-4 to 5-3-1, Interior(1) 5-3-1 to 23-8-9 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Ceiling dead load (10.0 psf) on member(s). 4-14; Wall dead load (5.0psf) on member(s).4-10
 - Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 10-12
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 12 lb uplift at joint 12.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - Attic room checked for L/360 deflection.



February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)


ENGINEERING BY
TRENCO
A MiTek Affiliate
818 Soundside Road
Edenton, NC 27932

Job J0124-0288	Truss A9	Truss Type ROOF TRUSS	Qty 3	Ply 1	Weaver Homes/Lot 9 West Pointe III Job Reference (optional)	I63532528
-------------------	-------------	--------------------------	----------	----------	--	-----------

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:38 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrcDoi7J4zJC?f

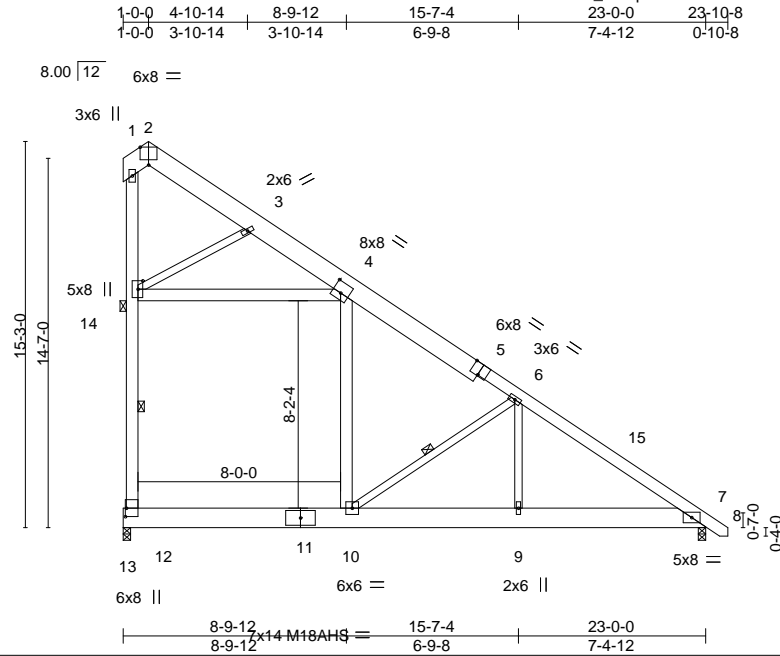

Scale = 1:91.0

Plate Offsets (X,Y)-- [2:0-4-0,Edge], [4:0-4-0,0-5-0], [5:0-4-0,Edge], [12:0-4-0,0-0-8], [14:0-4-0,0-2-4]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.95	Vert(LL) -0.31	10	>861	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.85	Vert(CT) -0.68	10	>397	240	M18AHS	186/179
BCLL 0.0 *	Rep Stress Incr YES	WB 0.67	Horz(CT) 0.01	7	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.26	9-10	>999	240		
							Weight: 282 lb	FT = 20%


LUMBER-
TOP CHORD 2x10 SP No.1 *Except*
5-8: 2x6 SP No.1
BOT CHORD 2x10 SP No.1
WEBS 2x4 SP No.2 *Except*
4-10,4-14: 2x6 SP No.1
OTHERS 2x6 SP 2400F 2.0E

BRACING-
TOP CHORD Structural wood sheathing directly applied or 1-7-8 oc purlins.
BOT CHORD Rigid ceiling directly applied or 5-3-9 oc bracing.
WEBS 1 Row at midpt 6-10, 12-14
JOINTS 1 Brace at Jt(s): 14

REACTIONS. (size) 12=0-3-8, 7=0-3-8
Max Horz 12=-475(LC 13)
Max Uplift 12=-7(LC 13)
Max Grav 12=1702(LC 21), 7=1101(LC 21)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-54/261, 3-4=-606/70, 4-6=-658/93, 6-7=-1688/75, 12-14=-851/96
BOT CHORD 10-12=-55/468, 9-10=0/1314, 7-9=0/1314
WEBS 4-10=0/539, 6-10=-1491/224, 6-9=0/653, 4-14=-133/724, 3-14=-1437/163

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-4-4 to 5-3-1, Interior(1) 5-3-1 to 23-8-9 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Ceiling dead load (10.0 psf) on member(s). 4-14; Wall dead load (5.0psf) on member(s).4-10
 - Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 10-12
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 7 lb uplift at joint 12.
 - Attic room checked for L/360 deflection.

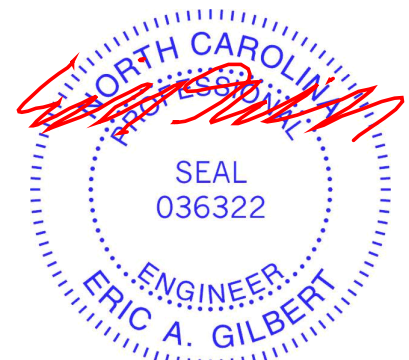

February 9,2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




Job J0124-0288	Truss A9GE	Truss Type GABLE	Qty 1	Ply 1	Weaver Homes/Lot 9 West Pointe III Job Reference (optional)	163532529
-------------------	---------------	---------------------	----------	----------	--	-----------

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:39 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

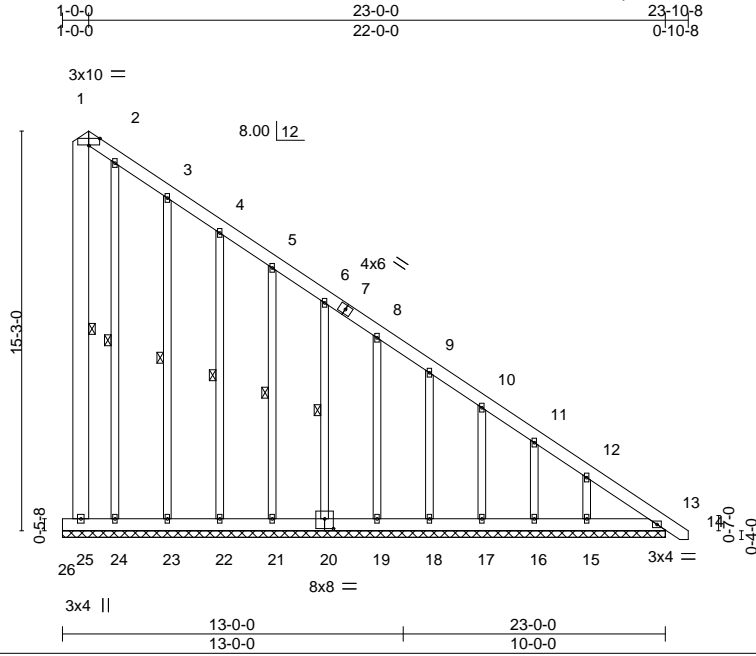

Scale = 1:87.9

Plate Offsets (X,Y)-- [1:0-5-0,Edge], [20:0-4-0,0-4-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.08	Vert(LL) 0.00	13	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.07	Vert(CT) -0.00	13	n/r	120		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.13	Horz(CT) 0.01	13	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S					Weight: 278 lb	FT = 20%

LUMBER-
 TOP CHORD 2x6 SP No.1
 BOT CHORD 2x6 SP No.1
 WEBS 2x8 SP No.1
 OTHERS 2x4 SP No.2

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
 WEBS 1 Row at midpt 1-25, 2-24, 3-23, 4-22, 5-21, 6-20

REACTIONS. All bearings 23-0-0.
 (lb) - Max Horz 26=-716(LC 13)
 Max Uplift All uplift 100 lb or less at joint(s) 26, 25, 13, 24, 23, 22, 21, 20, 19, 18, 17, 16 except 15=-144(LC 13)
 Max Grav All reactions 250 lb or less at joint(s) 26, 25, 24, 23, 22, 21, 20, 19, 18, 17, 16 except 13=402(LC 13), 15=265(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 5-6=-316/253, 6-8=-391/312, 8-9=-466/371, 9-10=-541/430, 10-11=-617/490, 11-12=-686/540, 12-13=-800/641
 BOT CHORD 25-26=-561/716, 24-25=-559/714, 23-24=-559/714, 22-23=-559/714, 21-22=-559/714, 20-21=-559/714, 19-20=-559/714, 18-19=-559/714, 17-18=-559/714, 16-17=-559/714, 15-16=-559/714, 13-15=-559/714

- NOTES-**
- 1) Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) 0-8-6 to 5-1-3, Exterior(2) 5-1-3 to 23-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 2) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
 - 3) All plates are 2x4 MT20 unless otherwise indicated.
 - 4) Gable requires continuous bottom chord bearing.
 - 5) Gable studs spaced at 2-0-0 oc.
 - 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 7) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 26, 25, 13, 24, 23, 22, 21, 20, 19, 18, 17, 16 except (jt=lb) 15=144.



February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)



818 Soundside Road
 Edenton, NC 27932

Job J0124-0288	Truss B1GE	Truss Type GABLE	Qty 1	Ply 1	Weaver Homes/Lot 9 West Pointe III 163532531
-------------------	---------------	---------------------	----------	----------	---

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:43 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

0-10-8 17-1-8 20-0-0 22-10-8 40-0-0 40-10-8
0-10-8 17-1-8 2-10-8 2-10-8 17-1-8 0-10-8

Scale = 1:78.5

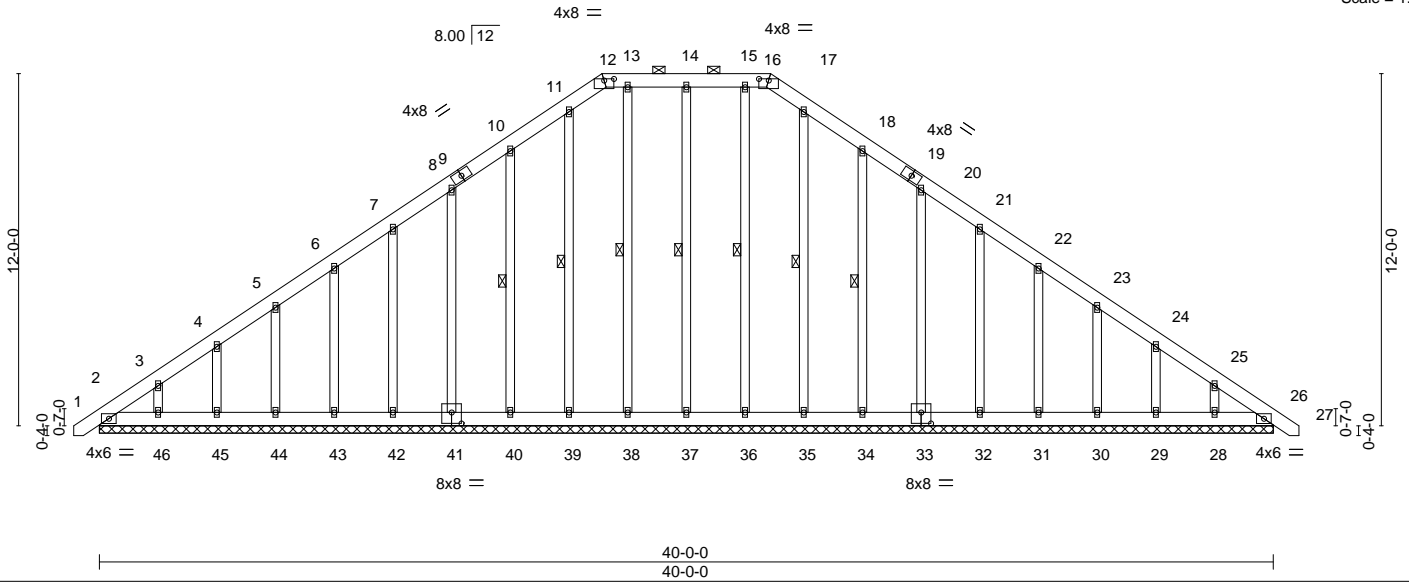


Plate Offsets (X,Y)-- [12:0-4-0,0-0-10], [16:0-4-0,0-0-10], [33:0-4-0,0-4-8], [41:0-4-0,0-4-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.15	TC 0.06	Vert(LL)	0.00 26	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	0.00 26	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.16	Horz(CT)	0.01 26	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014		Matrix-S					Weight: 393 lb	FT = 20%


LUMBER-
TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
OTHERS 2x4 SP No.2

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except 2-0-0 oc purlins (6-0-0 max.): 12-16.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 14-37, 13-38, 11-39, 10-40, 15-36, 17-35, 18-34

REACTIONS. All bearings 40-0-0.
(lb) - Max Horz 2=358(LC 11)
Max Uplift All uplift 100 lb or less at joint(s) 26, 37, 38, 39, 40, 41, 42, 43, 44, 45, 36, 34, 33, 32, 31, 30, 29, 28 except 2=106(LC 8), 46=-103(LC 12)
Max Grav All reactions 250 lb or less at joint(s) 2, 26, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 36, 35, 34, 33, 32, 31, 30, 29, 28

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-363/289, 3-4=-279/255, 8-10=-211/272, 10-11=-275/318, 11-12=-282/324, 12-13=-268/316, 13-14=-268/316, 14-15=-268/316, 15-16=-268/316, 16-17=-282/324, 17-18=-275/314, 25-26=-268/186
BOT CHORD 2-46=-168/263, 45-46=-168/263, 44-45=-168/263, 43-44=-168/263, 42-43=-168/263, 41-42=-168/263, 40-41=-168/263, 39-40=-168/263, 38-39=-168/263, 37-38=-168/263, 36-37=-168/263, 35-36=-168/263, 34-35=-168/263, 33-34=-168/263, 32-33=-168/263, 31-32=-168/263, 30-31=-168/263, 29-30=-168/263, 28-29=-168/263, 26-28=-168/263

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) -0-8-9 to 3-8-4, Exterior(2) 3-8-4 to 17-2-6, Corner(3) 17-2-6 to 21-7-2, Exterior(2) 21-7-2 to 22-9-10, Corner(3) 22-9-10 to 27-2-7, Exterior(2) 27-2-7 to 40-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
 - Provide adequate drainage to prevent water ponding.
 - All plates are 2x4 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Gable studs spaced at 2-0-0 oc.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 26, 37, 38, 39, 40, 41, 42, 43, 44, 45, 36, 34, 33, 32, 31, 30, 29, 28 except (jt=lb) 2=106, 46=103.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

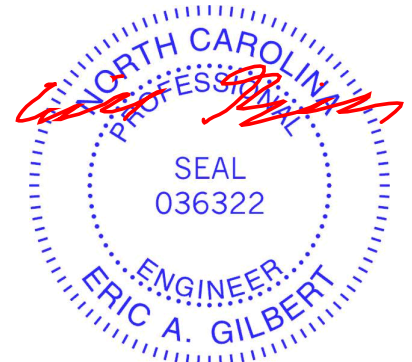

February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbccomponents.com)

ENGINEERING BY
TRENCO
A MiTek Affiliate


818 Soundside Road
Edenton, NC 27932

Job J0124-0288	Truss C1	Truss Type ATTIC	Qty 1	Ply 1	Weaver Homes/Lot 9 West Pointe III 163532532
-------------------	-------------	---------------------	----------	----------	---

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:45 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f



6x8 =

Scale = 1:78.5

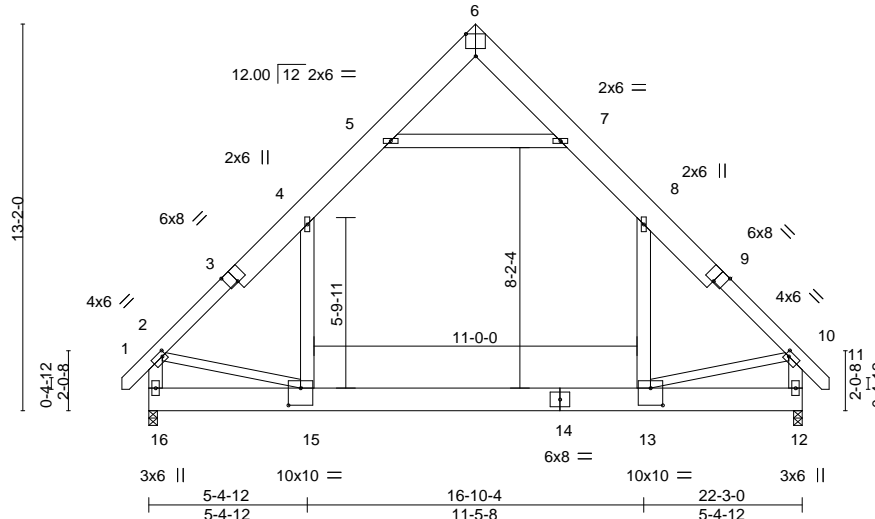


Plate Offsets (X,Y)-- [2:0-1-8,0-2-0], [3:0-4-0,Edge], [6:0-4-0,Edge], [9:0-4-0,Edge], [10:0-1-8,0-2-0], [13:0-5-0,0-7-0], [15:0-5-0,0-7-0]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.15	TC 0.33	Vert(LL)	-0.12 13-15	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL	1.15	BC 0.58	Vert(CT)	-0.19 13-15	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.31	Horz(CT)	0.01 12	n/a	n/a		
BCDL 10.0	Code IRC2015/TP12014		Matrix-S	Wind(LL)	0.05 15	>999	240		
								Weight: 267 lb	FT = 20%

LUMBER-
 TOP CHORD 2x10 SP No.1 *Except*
 1-3,9-11: 2x6 SP No.1
 BOT CHORD 2x10 SP No.1
 WEBS 2x6 SP No.1 *Except*
 2-15,10-13: 2x4 SP No.2

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 5-9-4 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 16=0-3-8, 12=0-3-8
 Max Horz 16=-419(LC 10)
 Max Grav 16=1469(LC 21), 12=1469(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-4=-1676/22, 4-5=-1046/187, 7-8=-1045/187, 8-10=-1675/22, 2-16=-1615/65,
 10-12=-1616/65
 BOT CHORD 15-16=-426/556, 13-15=0/1123
 WEBS 5-7=-1196/266, 4-15=0/744, 8-13=0/744, 2-15=-2/1037, 10-13=-11/1043

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) -0-9-0 to 3-7-13, Exterior(2) 3-7-13 to 11-2-0, Corner(3) 11-2-0 to 15-6-13, Exterior(2) 15-6-13 to 23-1-0 zone; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 4) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - 5) Ceiling dead load (10.0 psf) on member(s). 4-5, 7-8, 5-7; Wall dead load (5.0psf) on member(s).4-15, 8-13
 - 6) Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 13-15
 - 7) Attic room checked for L/360 deflection.



February 9, 2024


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
 Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)



Job J0124-0288	Truss C1GE	Truss Type GABLE	Qty 1	Ply 1	Weaver Homes/Lot 9 West Pointe III 163532533
-------------------	---------------	---------------------	----------	----------	---

Comtech, Inc., Fayetteville, NC 28309

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-2C2U2ZRspLQNZRS8TxBLWe6B18NDp1tqEzNaezmuxA
8.430 s Jan 6 2022 MiTek Industries, Inc. Fri Feb 9 11:49:55 2024 Page 1



5x5 =

Scale = 1:53.4

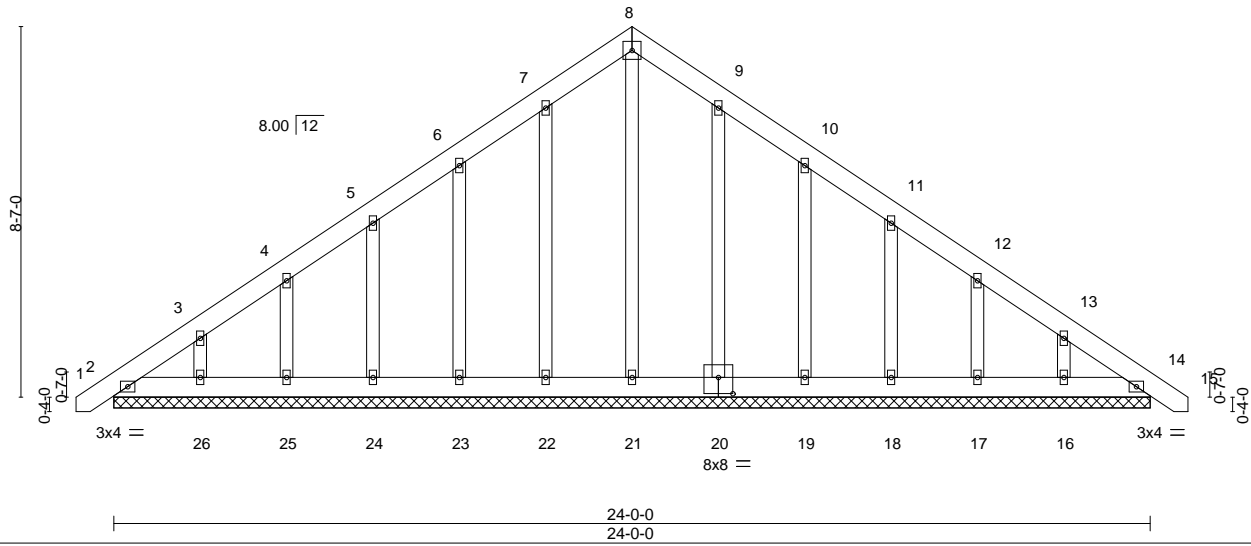


Plate Offsets (X,Y)-- [20:0-4-0,0-4-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.15	TC 0.03	Vert(LL)	0.00	14	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	0.00	14	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.16	Horz(CT)	0.00	14	n/a	n/a		
BCDL 10.0	Code	IRC2015/TPI2014	Matrix-S						Weight: 195 lb	FT = 20%


LUMBER-
TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
OTHERS 2x4 SP No.2

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 24-0-0.
(lb) - Max Horz 2=-254(LC 10)
Max Uplift All uplift 100 lb or less at joint(s) 2, 14, 22, 23, 24, 25, 26, 20, 19, 18, 17, 16
Max Grav All reactions 250 lb or less at joint(s) 2, 14, 21, 22, 23, 24, 25, 26, 20, 19, 18, 17, 16

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) -0-8-9 to 3-8-4, Exterior(2) 3-8-4 to 12-0-0, Corner(3) 12-0-0 to 16-4-13, Exterior(2) 16-4-13 to 24-8-9 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
 - All plates are 2x4 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Gable studs spaced at 2-0-0 oc.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 14, 22, 23, 24, 25, 26, 20, 19, 18, 17, 16.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

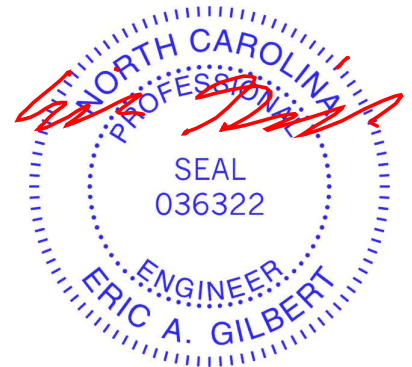

February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
Edenton, NC 27932

Job J0124-0288	Truss C2	Truss Type ATTIC	Qty 8	Ply 1	Weaver Homes/Lot 9 West Pointe III 163532534
-------------------	-------------	---------------------	----------	----------	---

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:47 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f



6x8 =

Scale = 1:78.5

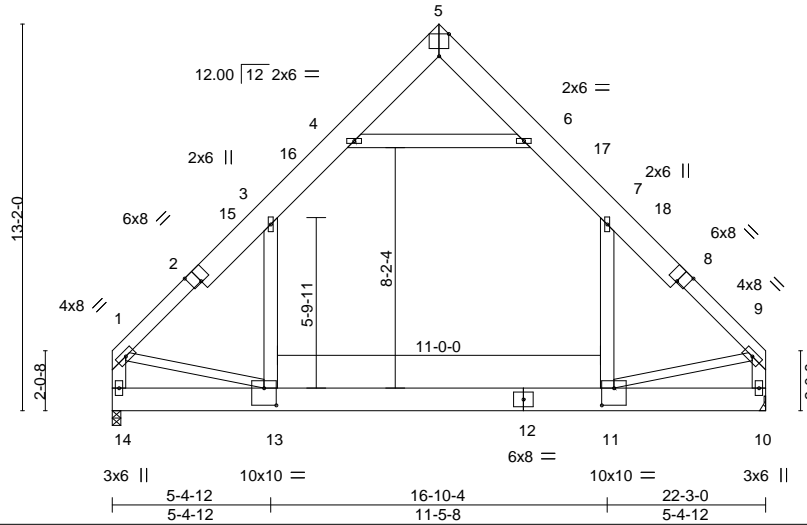


Plate Offsets (X,Y)-- [2:0-4-0,Edge], [5:0-4-0,Edge], [8:0-4-0,Edge], [11:0-5-0,0-7-0], [13:0-5-0,0-7-0]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL 1.15	TC 0.35	Vert(LL) -0.12	11-13	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL 1.15	BC 0.58	Vert(CT) -0.20	11-13	>999	240		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.32	Horz(CT) 0.01	10	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014	Matrix-S	Wind(LL) 0.04	13	>999	240		
							Weight: 262 lb	FT = 20%


LUMBER-
TOP CHORD 2x10 SP No.1 *Except*
1-2,8-9: 2x6 SP No.1
BOT CHORD 2x10 SP No.1
WEBS 2x6 SP No.1 *Except*
1-13,9-11: 2x4 SP No.2

BRACING-
TOP CHORD Structural wood sheathing directly applied or 5-8-5 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 14=0-3-8, 10=Mechanical
Max Horz 14=256(LC 9)
Max Grav 14=1434(LC 21), 10=1434(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-1657/0, 3-4=-1043/150, 6-7=-1043/150, 7-9=-1657/0, 1-14=-1567/0, 9-10=-1568/0
BOT CHORD 13-14=-285/369, 11-13=0/1080
WEBS 4-6=-1228/196, 3-13=0/728, 7-11=0/728, 1-13=0/1035, 9-11=0/1039

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-3-4 to 4-8-1, Interior(1) 4-8-1 to 11-2-0, Exterior(2) 11-2-0 to 15-6-13, Interior(1) 15-6-13 to 22-0-12 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 4) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - 5) Ceiling dead load (10.0 psf) on member(s). 3-4, 6-7, 4-6; Wall dead load (5.0psf) on member(s).3-13, 7-11
 - 6) Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 11-13
 - 7) Refer to girder(s) for truss to truss connections.
 - 8) Attic room checked for L/360 deflection.

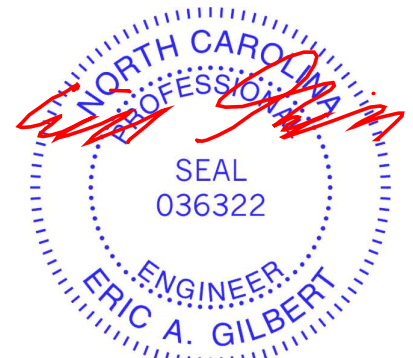

February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPH Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
Edenton, NC 27932

Job J0124-0288	Truss C3	Truss Type ATTIC	Qty 1	Ply 2	Weaver Homes/Lot 9 West Pointe III 163532535
-------------------	-------------	---------------------	----------	----------	---

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:49 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f



6x8 =

Scale = 1:78.5

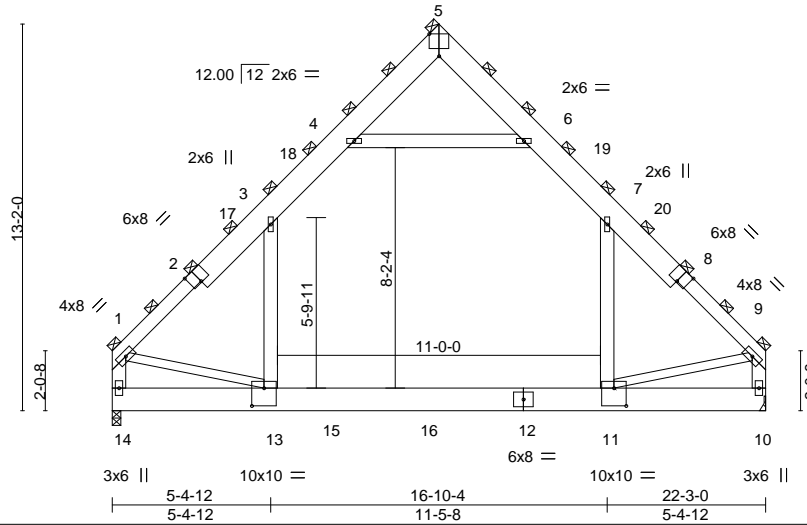


Plate Offsets (X,Y)-- [2:0-4-0,Edge], [5:0-4-0,Edge], [8:0-4-0,Edge], [11:0-5-0,0-7-4], [13:0-5-0,0-7-4]

LOADING (psf)	SPACING-	3-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.15	TC 0.44	Vert(LL)	-0.14 11-13	>999	360	MT20	244/190
TCDL 10.0	Lumber DOL	1.15	BC 0.76	Vert(CT)	-0.22 11-13	>999	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.24	Horz(CT)	0.01 10	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014		Matrix-S	Wind(LL)	0.04 11-13	>999	240		
								Weight: 524 lb	FT = 20%

LUMBER-
TOP CHORD 2x10 SP No.1 *Except*
1-2,8-9: 2x6 SP No.1
BOT CHORD 2x10 SP No.1
WEBS 2x6 SP No.1 *Except*
1-13,9-11: 2x4 SP No.2

BRACING-
TOP CHORD 2-0-0 oc purlins (6-0-0 max.), except end verticals
(Switched from sheeted: Spacing > 2-8-0).
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 14=0-3-8, 10=Mechanical
Max Horz 14=384(LC 9)
Max Grav 14=2783(LC 21), 10=2577(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-3252/47, 3-4=-1860/268, 4-5=-57/486, 5-6=-59/420, 6-7=-1926/278, 7-9=-3168/41,
1-14=-3093/67, 9-10=-3004/54
BOT CHORD 13-14=-426/580, 11-13=0/2086
WEBS 4-6=-2516/391, 3-13=0/1662, 7-11=0/1480, 1-13=0/1969, 9-11=0/2075

- NOTES-**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x10 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x10 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-3-4 to 4-8-1, Interior(1) 4-8-1 to 11-2-0, Exterior(2) 11-2-0 to 15-6-13, Interior(1) 15-6-13 to 22-0-12 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Ceiling dead load (10.0 psf) on member(s). 3-4, 6-7, 4-6; Wall dead load (5.0psf) on member(s).3-13, 7-11
 - Bottom chord live load (40.0 psf) and additional bottom chord dead load (10.0 psf) applied only to room. 11-13
 - Refer to girder(s) for truss to truss connections.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 529 lb down and 76 lb up at 7-4-8, and 529 lb down and 76 lb up at 10-8-8 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
 - Attic room checked for L/360 deflection.

LOAD CASE(S) Standard

Continued on page 2



February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPH Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)



818 Soundside Road
Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver Homes/Lot 9 West Pointe III	I63532535
J0124-0288	C3	ATTIC	1	2	Job Reference (optional)	

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:49 2024 Page 2
 ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 13-14=-30, 11-13=-60, 10-11=-30, 1-3=-90, 3-4=-120, 4-5=-90, 5-6=-90, 6-7=-120, 7-9=-90, 4-6=-30

Drag: 3-13=-15, 7-11=-15

Concentrated Loads (lb)

Vert: 15=-300(B) 16=-300(B)

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPH Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
 Edenton, NC 27932

Job J0124-0288	Truss C4	Truss Type FINK	Qty 6	Ply 1	Weaver Homes/Lot 9 West Pointe III 163532536
-------------------	-------------	--------------------	----------	----------	---

Comtech, Inc., Fayetteville, NC 28309

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-AiKPh0b0IL2XdRyekaWpYN8H_Nj6NguDpldZWOzmuWz
8.430 s Jan 6 2022 MiTek Industries, Inc. Fri Feb 9 11:50:08 2024 Page 1



4x6 =

Scale = 1:52.2

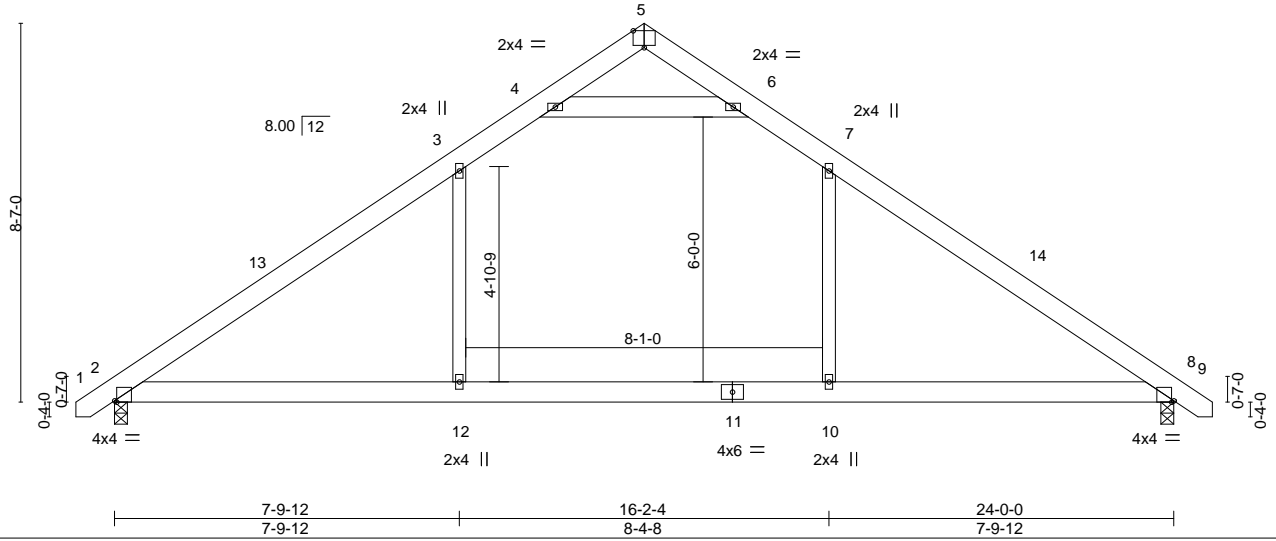


Plate Offsets (X,Y)-- [2:0-0-10,Edge], [5:0-3-0,Edge], [8:0-0-10,Edge]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.15	TC 0.59	Vert(LL)	-0.17	10-12	>999	MT20	244/190
TCDL 10.0	Lumber DOL	1.15	BC 0.41	Vert(CT)	-0.24	10-12	>999		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.30	Horz(CT)	0.02	8	n/a		
BCDL 10.0	Code IRC2015/TPI2014		Matrix-S	Wind(LL)	0.15	2-12	>999		
								Weight: 155 lb	FT = 20%


LUMBER-
TOP CHORD 2x6 SP No.1
BOT CHORD 2x6 SP No.1
WEBS 2x4 SP No.2 *Except*
4-6: 2x6 SP No.1

BRACING-
TOP CHORD Structural wood sheathing directly applied or 5-8-12 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 2=0-3-8, 8=0-3-8
Max Horz 2=-203(LC 10)
Max Uplift 2=-62(LC 12), 8=-62(LC 13)
Max Grav 2=1118(LC 19), 8=1118(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1548/251, 3-4=-1077/310, 4-5=-98/433, 5-6=-98/433, 6-7=-1077/310, 7-8=-1548/251
BOT CHORD 2-12=-54/1187, 10-12=-54/1187, 8-10=-54/1187
WEBS 3-12=0/469, 7-10=0/469, 4-6=-1618/472

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) 0-8-9 to 3-8-4, Interior(1) 3-8-4 to 12-0-0, Exterior(2) 12-0-0 to 16-2-4, Interior(1) 16-2-4 to 24-8-9 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 8.
 - This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

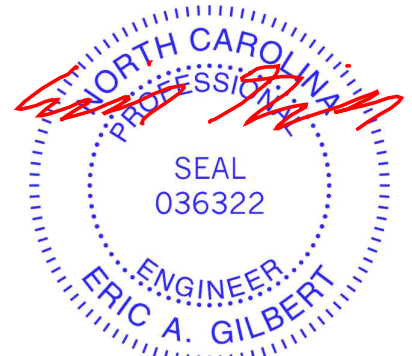

February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)



818 Soundside Road
Edenton, NC 27932

Job J0124-0288	Truss G2GR	Truss Type FINK	Qty 1	Ply 2	Weaver Homes/Lot 9 West Pointe III Job Reference (optional)	163532537
-------------------	---------------	--------------------	----------	-----------------	--	-----------

Comtech, Inc., Fayetteville, NC 28309

8.430 s Jan 6 2022 MiTek Industries, Inc. Fri Feb 9 11:59:40 2024 Page 2
 ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-QlueqbVp257MFLhaEIBXk?q4xyvVODVPLIBrcEzmuO1

LOAD CASE(S) Standard
 Concentrated Loads (lb)

Vert: 10=-1147(F) 11=-1146(F) 12=-1146(F) 13=-1146(F) 14=-1146(F) 16=-1146(F) 17=-1146(F) 18=-1146(F) 19=-1961(F)

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPH Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)



818 Soundside Road
 Edenton, NC 27932


Job J0124-0288	Truss PB1	Truss Type Piggyback	Qty 8	Ply 1	Weaver Homes/Lot 9 West Pointe III 163532538
-------------------	--------------	-------------------------	----------	----------	---

Comtech, Inc, Fayetteville, NC - 28314,


8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:53 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f

Job Reference (optional)



Scale = 1:21.3

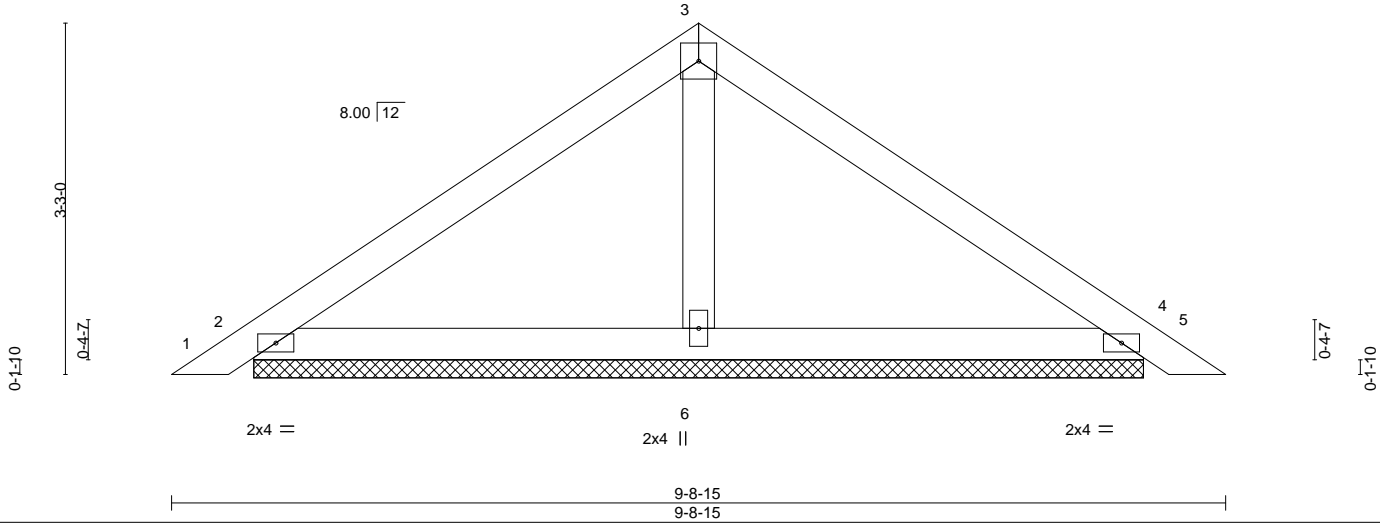

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 20.0	2-0-0	TC 0.23	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.15	BC 0.13	Vert(LL) 0.01 5 n/r 120		
BCLL 0.0 *	Lumber DOL 1.15	WB 0.03	Vert(CT) 0.02 5 n/r 120		
BCDL 10.0	Rep Stress Incr YES	Matrix-P	Horz(CT) 0.00 4 n/a n/a		
	Code IRC2015/TPI2014			Weight: 33 lb	FT = 20%


LUMBER-
TOP CHORD 2x4 SP No.1
BOT CHORD 2x4 SP No.1
OTHERS 2x4 SP No.2

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 2=8-2-11, 4=8-2-11, 6=8-2-11
Max Horz 2=-74(LC 10)
Max Uplift 2=-36(LC 12), 4=-44(LC 13)
Max Grav 2=211(LC 1), 4=211(LC 1), 6=297(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TC DL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Gable requires continuous bottom chord bearing.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 4.
 - See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.

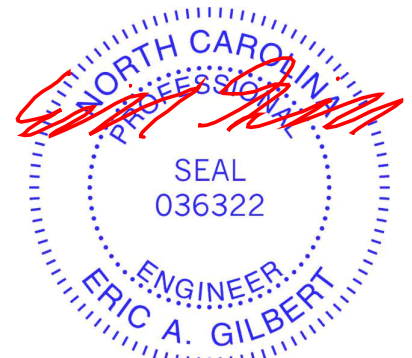

February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
Edenton, NC 27932


Job	Truss	Truss Type	Qty	Ply	Weaver Homes/Lot 9 West Pointe III	163532539
J0124-0288	PB1GE	GABLE	1	1		

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:54 2024 Page 1
 ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f



Scale = 1:21.4

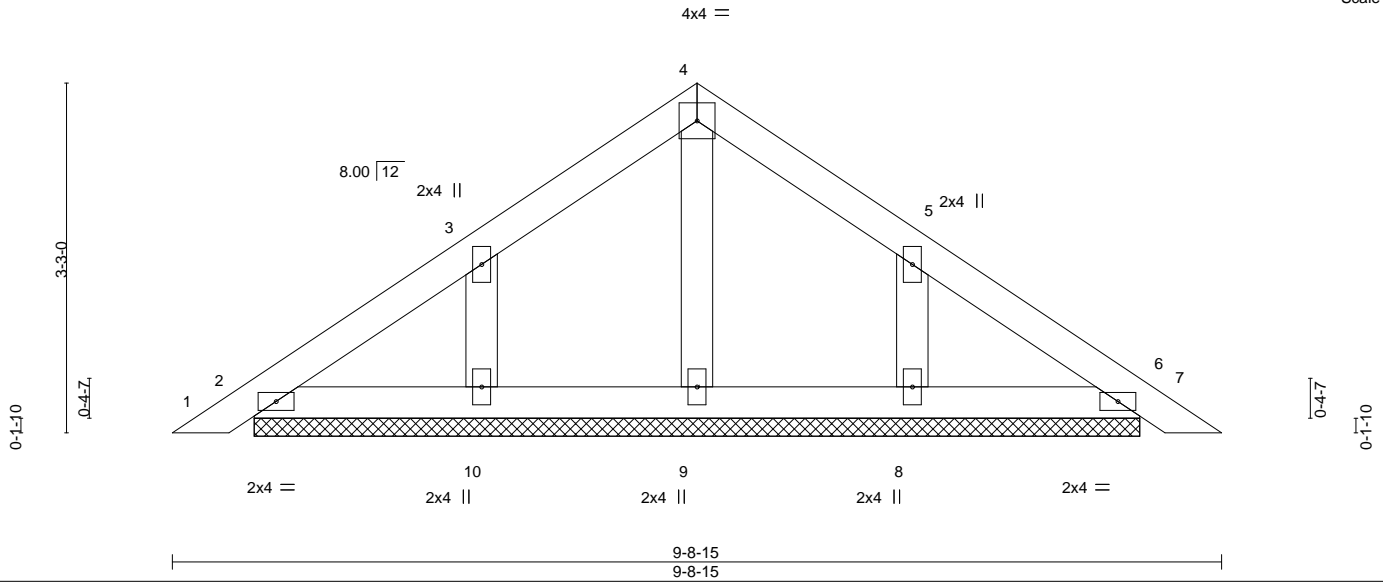

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.15	TC 0.05	Vert(LL)	0.00	6	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	0.00	6	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	6	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014		Matrix-P						Weight: 37 lb	FT = 20%

LUMBER-
 TOP CHORD 2x4 SP No.1
 BOT CHORD 2x4 SP No.1
 OTHERS 2x4 SP No.2

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 8-2-11.
 (lb) - Max Horz 2=-92(LC 10)
 Max Uplift All uplift 100 lb or less at joint(s) 2, 6 except 10=-112(LC 12), 8=-111(LC 13)
 Max Grav All reactions 250 lb or less at joint(s) 2, 6, 9, 10, 8

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCCL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2) zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
 - Gable requires continuous bottom chord bearing.
 - Gable studs spaced at 2-0-0 oc.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 6 except (jt=lb) 10=112, 8=111.
 - See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.



February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
 Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)



818 Soundside Road
 Edenton, NC 27932

Job	Truss	Truss Type	Qty	Ply	Weaver Homes/Lot 9 West Pointe III	I63532540
J0124-0288	PB2	Piggyback	5	1		

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:55 2024 Page 1

ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITxbGKWrCDoi7J4zJC?f



3x4 =

Scale = 1:13.5

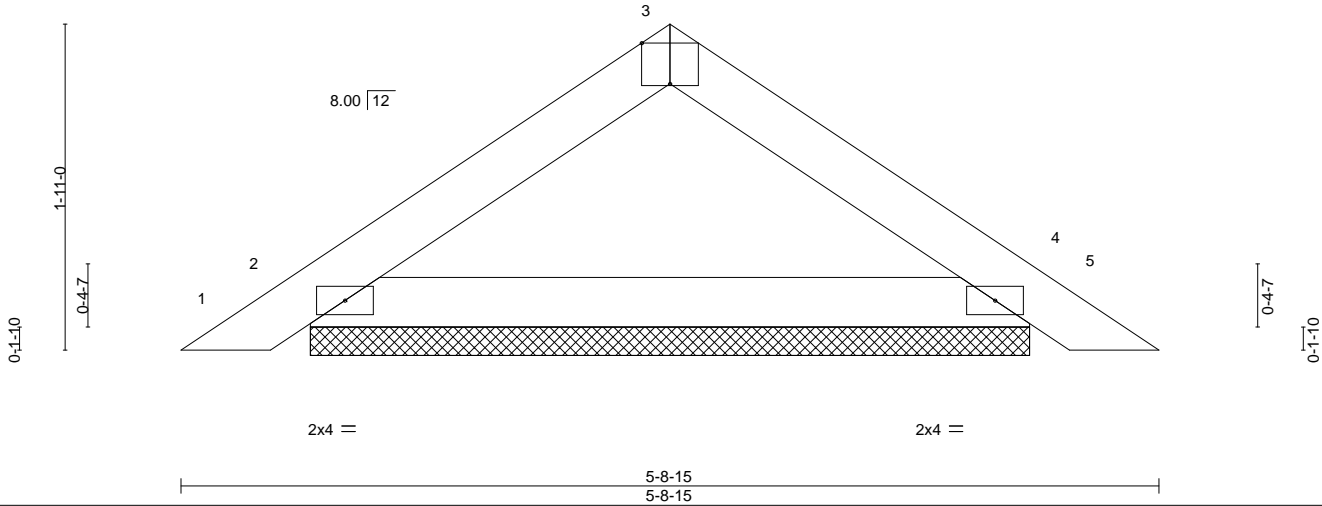


Plate Offsets (X,Y)-- [3:0-2-0,Edge]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.15	TC 0.06	Vert(LL)	0.00	5	n/r	120	MT20	244/190
TCDL 10.0	Lumber DOL	1.15	BC 0.16	Vert(CT)	0.00	5	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2015/TPI2014		Matrix-P						Weight: 17 lb	FT = 20%


LUMBER-
 TOP CHORD 2x4 SP No.1
 BOT CHORD 2x4 SP No.1

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 5-8-15 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 2=4-2-11, 4=4-2-11
 Max Horz 2=42(LC 11)
 Max Uplift 2=-16(LC 12), 4=-16(LC 13)
 Max Grav 2=199(LC 1), 4=199(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Exterior(2) zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Gable requires continuous bottom chord bearing.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 4.
 - See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.

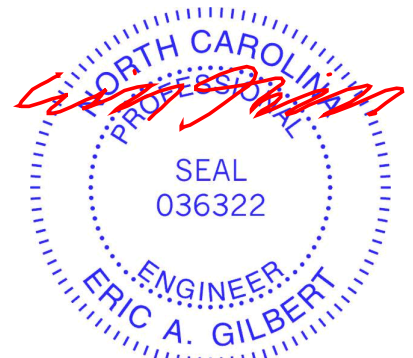

February 9,2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)




818 Soundside Road
 Edenton, NC 27932


Job J0124-0288	Truss PB2GE	Truss Type PIGGYBACK	Qty 1	Ply 1	Weaver Homes/Lot 9 West Pointe III Job Reference (optional)	163532541
-------------------	----------------	-------------------------	----------	----------	--	-----------

Comtech, Inc, Fayetteville, NC - 28314,

8.430 s Jan 6 2022 MiTek Industries, Inc. Thu Feb 8 14:04:56 2024 Page 1
ID:FKRF2G2VvSGFSXRUG_ubJqzaK1d-RfC?PsB70Hq3NSgPqnL8w3uITXbGKWrCDoi7J4zJC?f



Scale = 1:13.6

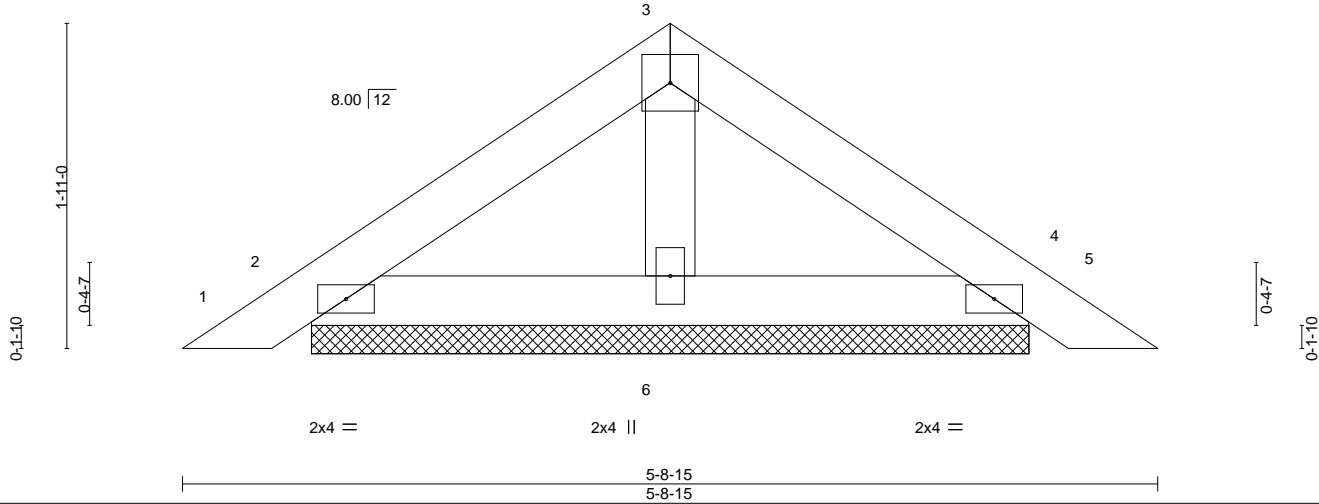

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plate Grip DOL	1.15	TC 0.06	Vert(LL)	0.00	5	n/r	MT20	244/190
TCDL 10.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	0.00	5	n/r		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.01	Horz(CT)	0.00	4	n/a		
BCDL 10.0	Code IRC2015/TPI2014		Matrix-P						
								Weight: 18 lb	FT = 20%


LUMBER-
TOP CHORD 2x4 SP No.1
BOT CHORD 2x4 SP No.1
OTHERS 2x4 SP No.2

BRACING-
TOP CHORD Structural wood sheathing directly applied or 5-8-15 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 2=4-2-11, 4=4-2-11, 6=4-2-11
Max Horz 2=-52(LC 10)
Max Uplift 2=-47(LC 12), 4=-54(LC 13), 6=-1(LC 12)
Max Grav 2=125(LC 1), 4=125(LC 1), 6=148(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-10; Vult=130mph Vasd=103mph; TCDL=6.0psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2) zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) Gable requires continuous bottom chord bearing.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) * This truss has been designed for a live load of 30.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 4, 6.
 - 7) See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.

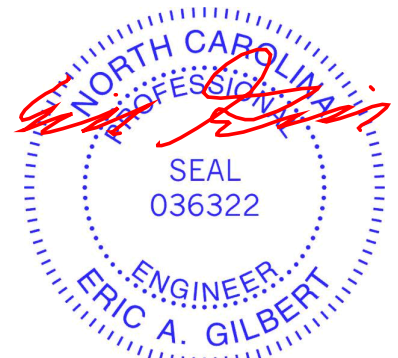

February 9, 2024

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 1/2/2023 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TP1 Quality Criteria and DSB-22** available from Truss Plate Institute (www.tpinst.org) and **BCSI Building Component Safety Information** available from the Structural Building Component Association (www.sbcacomponents.com)



818 Soundside Road
Edenton, NC 27932

Symbols


PLATE LOCATION AND ORIENTATION



Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.



For 4 x 2 orientation, locate plates 0- 1/16\" from outside edge of truss.



This symbol indicates the required direction of slots in connector plates.

* Plate location details available in MITek software or upon request.

PLATE SIZE


4 X 4
The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number/letter where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TP1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-22: Design Standard for Bracing.
BCSI: Building Component Safety Information, Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

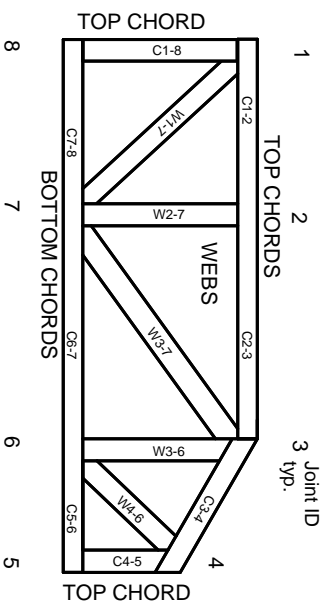

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

Product Code Approvals

ICC-ES Reports:

ESR-1988, ESR-2362, ESR-2685, ESR-3282
ESR-4722, ESL-1388

Design General Notes

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 section 6.3. These truss designs rely on Lumber values established by others.

© 2023 MITek® All Rights Reserved

MITek

ENGINEERING BY
TRENGO
A MITek Affiliate

MITek Engineering Reference Sheet: MIL-7473 rev. 1/2/2023

General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability/bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.