


THIS LAYOUT IS INTENDED FOR THE PURPOSE OF TRUSS LOCATION AND PLACEMENT ONLY. REFER TO THE BUILDING PLANS FOR ACTUAL BUILDING CONSTRUCTION.


Truss Connector Total List		
Qty	Product	Manuf
1	HHUS28-2	Simpson
14	HUS26	Simpson
37	LUS24	Simpson

THE PURPOSE OF THIS DETAIL IS TO ILLUSTRATE HOW TO PROPERLY SPACE 24" O.C. ROOF TRUSSES TO ALLOW FOR A 25 1/2" OPENING FOR PULL DOWN ATTIC ACCESS


TRUSSES TO BE DESIGNED AT 24" ON CENTER



TRUSS LAYOUT DIMENSIONS AT PULL DOWN ATTIC ACCESS

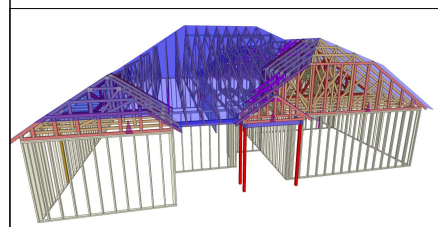

1st Level Roof Area: 0
2nd Level Roof Area: 0

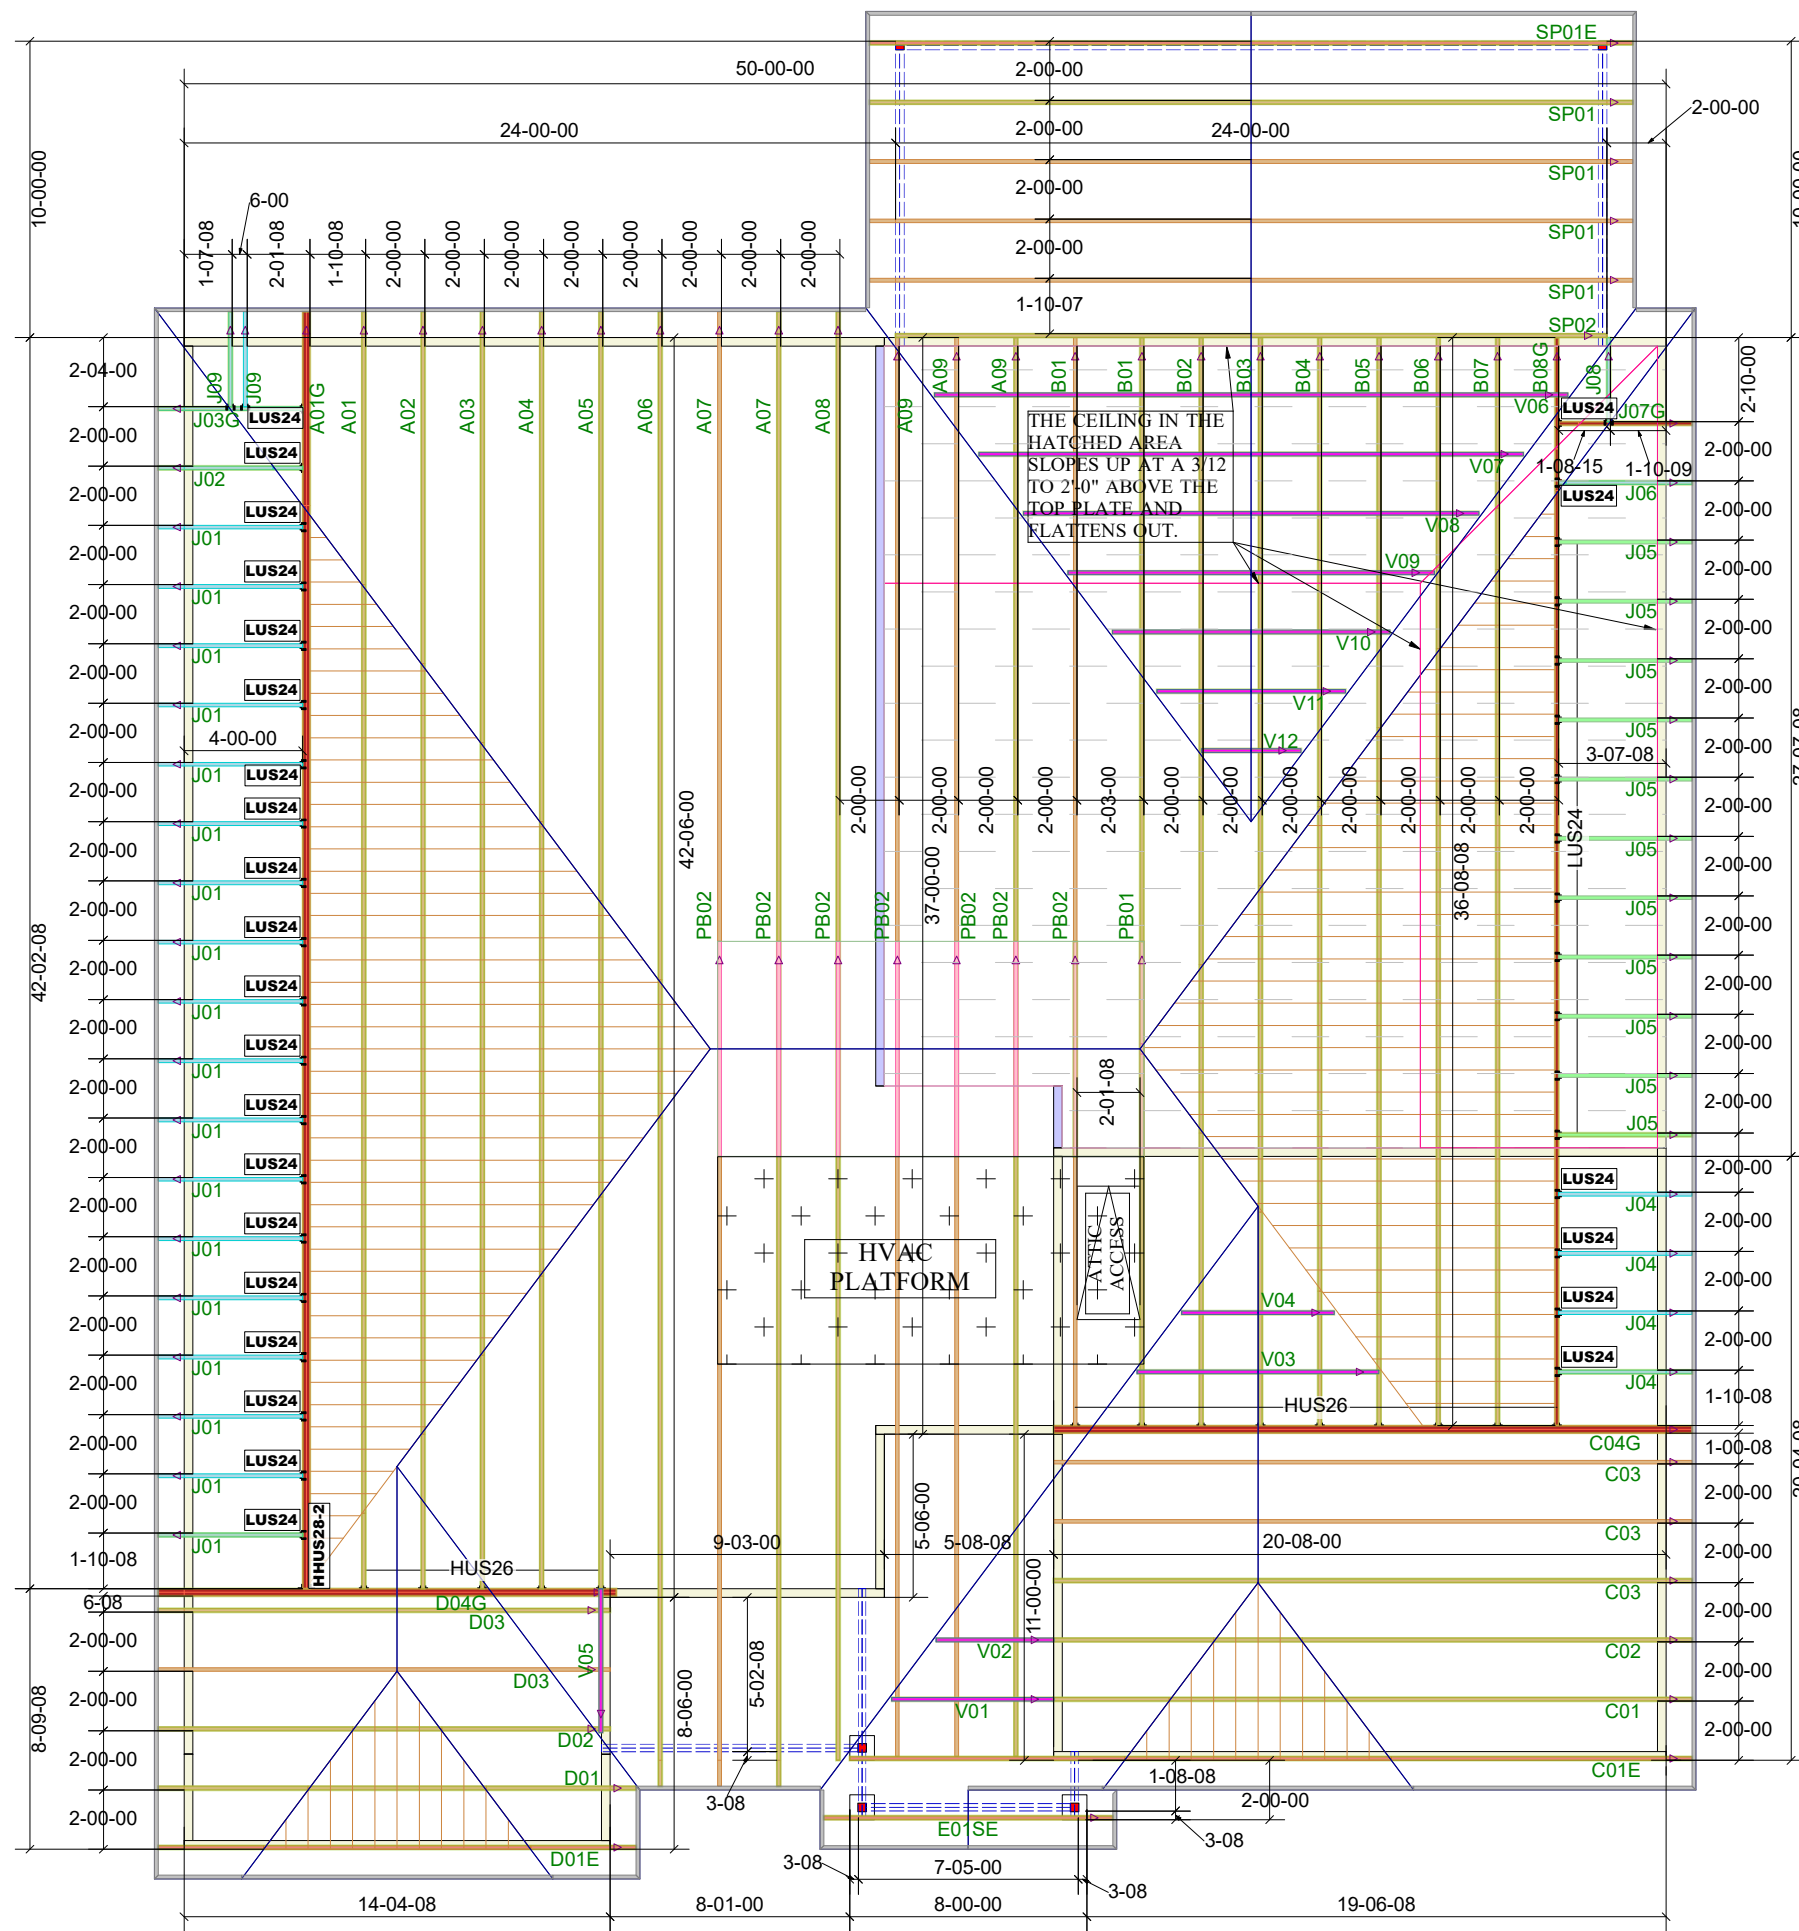

DEDICATED TO QUALITY AND EXCELLENCE
200 EMMETT ROAD
DUNN, NORTH CAROLINA 28334
PHONE: 910-892-8400

PROJECT: LOT 177 BIRCHWOOD GROVE

CUSTOMER: KB HOME

MODEL: 150-1910 - ELEVATION D - VOLUME CEILING - 10X24
SCREENED COVERED PORCH - GR

QUOTE #: 07726
PRINT DATE: 12/29/2023
DRAWN BY: Mike Bolt
SCALE: N.T.S

TOP LIVE LOAD: 20

TOP DEAD LOAD: 10

BOTTOM DEAD LOAD: 10

WIND SPEED: 130

GENERAL NOTES:

DO NOT CUT OR MODIFY TRUSSES

TRUSSES ARE SPACED 24" ON CENTER UNLESS OTHERWISE NOTED
REFER TO THE INDIVIDUAL TRUSS DESIGN DRAWINGS FOR THE LOCATION OF LATERAL BRACING AND MULTI-PLY CONNECTION REQUIREMENTS.

PER ANSITPI 1-2002 THE TRUSS ENGINEER IS RESPONSIBLE FOR TRUSS TO TRUSS CONNECTIONS AND TRUSS PLY TO PLY CONNECTIONS. THIS TRUSS LAYOUT PLAN RECOMMENDS TRUSS TO BEARING CONNECTIONS AND TRUSS TO BEAM CONNECTIONS WHICH SHALL BE REVIEWED BY THE BUILDING DESIGNER. IT IS THE RESPONSIBILITY OF THE BUILDING DESIGNER TO RESOLVE ALL ROOF FORCES ADEQUATELY TO THE FOUNDATION.