


SIMPSON CONNECTOR SCHEDULE							
HANGER TYPE	Qty	FASTE CARRYING MEMBER		CARRYING MEMBER	CARRIED MEMBER		
HTU-26	8	20-16d	20-10d x 1½	B02	A02, A02A		

THE SUGGESTED TRUSS HANGERS, CONNECTIONS AND TIE-DOWNS FOR GRAVITY, UPLIFT AND LATERAL LOADS, MUST BE REVIEWED BY THE BUILDING DESIGNER OR ENGINEER OF RECORD. PER ANSI/TPI 1-2002, ALL "TRUSS TO WALL" AND "TRUSS TO "TRUSS TO TRUSS" CONNECTIONS ARE THE RESPONSIBILTY OF THE TRUSS DESIGNER/ MANUFACTURER

	H2.5A	-
\Rightarrow	H10A	-
\triangle	HTS20	-
	TBE4	-
	LGT2	-
	LGT3	-
	MGT+HDU	-
		-

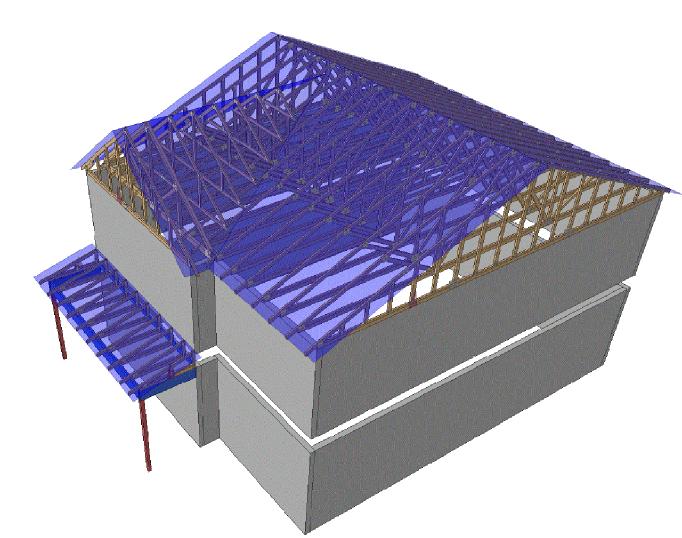

ISOMETRIC ELEVATION

SCALE: N.T.S.

ROOF TRUSS

REVISIONS

ŋ

+COP.

<u>"</u>

Hampton

on "A" BASE+COF New Horizons Fayetteville, NC A&G Residential

Truss Plant
Box 1546
, S.C. 29151
03-778-1921
3-773-4731

Sumter P.O. E

Box 1 , S.C. 303-7

Sumter, 5 none: 803 ax: 803-

S Ph

51 92 31

NOTES:

DO NOT CUT, DRILL, NOTCH, OR OTHERWISE DAMAGE TRUSSES. Contact your BFS Representative for assistance PRIOR TO modifying any truss. **Espanol** - (NO CORTE, PERFORE, HAGA MUESCAS O DANE DE CUALQUIER OTRA MANERA LAS TRUSSES (CERCHAS DE MADERA). Contacte a su representante de BFS para asistencia ANTES de realizar cualquier modification.)

- 1. This Truss Placement Diagram is intended to serve as a guide for truss installation. This Diagram has been prepared by a Truss Technician and is not an engineered drawing. 2. The responsibilities of the Owner, Building Designer, Contractor, Truss Designer, and
- Truss Manufacturer shall be as defined by the TPI 1 National Standard. 3. The wood components shown on this diagram are to be used in dry service (moisture content<19%) and non-toxic environmental applications. The metal plates and hangers are galvanized to the G60 Standard unless
- noted otherwise. 4. Refer to the Truss Design Drawings for specific information about each individual truss
- 5. The Truss Technician shall provide Truss-to-Truss Connection Requirements. Any special or other connection shall be the responsibility of the Building Designer.
- 6. The Truss Placement Diagram and Truss Design Drawings are the property of Builders FirstSource and may not be reused or reproduced in part or in total under any circumstances without prior written authorization.
- 7. In some cases, field framing may be required to achieve the final appearance shown on the Construction Documents. 8. Field framing, including valley rafters, installed over roof trusses shall have a knee brace from the rafter to the truss top chord at

intervals of 48" on center (O.C.) or less.

Stagger knee braces from adjacent rafters

such that the load is distributed uniformly over

- multiple truss locations and not concentrated at one location or along one truss. 9. Truss Top Chords shall be fully sheathed or have lateral bracing (purlins) spaced at 24" O.C. or less. Truss Bottom Chord Bracing shall not exceed the maximum shown on the Truss Design Drawing. Field framed bottom chord floor or ceiling attachments shall be spaced at 24" O.C. or less. Proper Bracing prevents buckling of individual truss members
- due to design loads. 10. This Placement Diagram is based upon the supporting structure being structurally adequate, dimensionally correct, square, plumb, and level to adequately support the trusses. The foundation design, structural member sizing, load transfer, bearing conditions, and the structure's compliance with the applicable building code are the responsibility of the Owner, Building Designer,
- and Contractor. 11. If Piggyback Trusses are included in this project, refer to the Mitek Piggyback Connection Detail applicable for the project details and wind load category. 12. The Contractor shall follow the SBCA TTB Partition Separation Prevention and Solutions for truss attachment to non-load bearing walls

INSTALLATION. FAILURE TO DO SO MAY RESULT IN INJURY OR DEATH. Espanol (TRUSSES (CERCHAS) DEBERAN TENER UN SOPORTE DURANTE LA INSTALACION. NO HACERLO PODRIA RESULTAR EN LESIONES O MUERTE.)

- meeting all code, local, OSHA, TPI, and BCSI Specifications. Failure to follow these specifications may result in injury or death. 2. Buildings under construction are vulnerable to high winds and present a possible safety
- hazard. The Contractor is responsible for recognizing adverse weather conditions and shall take appropriate action to prevent injury 3. BCSI INSTRUCTIONS SHALL BE
- **FOLLOWED:** BCSI-B1 = Safe Truss Handling and

BCSI-B2 = Installation and Temporary

BCSI-B3 = Permanent Restraint BCSI-B4 = Safe Construction Loading BCSI-B5 = Truss Damage and Modification Guidelines

BCSI-B7 = Floor Truss Installation BCSI-B8 = Toe-Nailed Connections BCSI-B9 = Multi-Ply Girders BCSI-B10 = Post Frame Truss Installation BCSI-B11 = Fall Protection 4. Follow TPI Requirements for Long Span

Trusses (>60').

3/5/2020 JOB NUMBER

SHEET NUMBER

DRAWN BY

MGM

DATE

and carefully complete these details to avoid gypsum wall board related issues. 1. Trusses shall be installed in a safe manner

2281537

ROOF TRUSS LAYOUT

SCALE: N.T.S.