
Harnett County Department of Public Health

A building permit cannot be issued with only an Improvement Permit

manager and Advided and Library and	PROPERTY LOCATION: 113 Sunr	
ISSUED TO: McKee Homes	subdivision Oakmont	LOT # 301
NEW REPAIR EXPANSION SFD 55'8"x49'9"	Site Improvements re	quired prior to Construction Authorization Issuance:
Proposed Wastewater System Type: 25% Reduction		
Projected Daily Flow: 480 GPD		
Number of bedrooms: 4 Number of Occupants: 8	max	
Basement Yes X No		
Pump Required: Yes No May be required based of	n final location and elevations of facilities	
Type of Water Supply: Community Public Well Permit conditions:	Distance from well feet	Permit valid for: Five years No expiration
A. M. A. A. amile	5/0/000	
Authorized State Agent::	Date: 5/6/2020	SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuar site is subject to revocation if the site plan, plat, or the intended use changes. The Im the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.	provement Permit shall not be affected by a change in own	scking with appropriate governing bodies in meeting their requirements. This ership of the site. This permit is subject to compliance with the provisions of
C	onstruction Authorization	
_	(Required for Building Permit)	
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .19		into this permit and shall be met. Systems shall be installed in accordance
with the attached system layout.	entre en communication de la communication de	,
ISSUED TO: McKee Homes	PROPERTY LOCATION: 113	Sunnybrook Ln
	SUBDIVISION Oakmont	LOT # 301
Facility Type: SFD 55'8"x49'9"		
Basement? Yes No Basement Fixtures?		
Type of Wastewater System** 25% Reduction	10	(Initial) Wastewater Flow: 480 GPD
(See note below, if applicable)		(IIIIIIai) Wastewater Flow OF D
25% Reduction	(Repair)	
	of trenches 1	
		Transk Sanina O Fact of Contra
	gth of each trench 150 feet	Trench Spacing: 9 Feet on Center
0	shall be installed on contour at a	Soil Cover: 6inches
	Trench Depth of: 18-24 inches	(Maximum soil cover shall not exceed
	ottoms shall be level to +/-1/4"	36" above the trench bottom)
in all dir	ections)	
Pump Requirements:ft. TDH vsGPM		inches below pipe
		Aggregate Depth:inches above pipe
Conditions:		inches total
WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. F	ROM ANY PART OF SEPTIC SYSTEM OR I	REPAIR AREA
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIEL		TEL AIR AIREA.
NO OTICITED ACCORD IN INITIAL ON NETAIN DIVANTILLE	D ARLA.	
**If applicable: 1 understand the system type specified is differen	from the type specified on the application.	I accept the specifications of this permit.
Owner/Legal Representative Signature:		Date:
This Construction Authorization is subject to revocation if the site plan, plat, or the inte		
Construction Authorization is subject to compliance with the provisions of the Laws and		•
1 41 .		
Authorized State Agent: Both Code REH	S_I Nata	5/6/2020
AUTHORIZED STATE ASCITE.	Construction Authorization Expiration D	
	construction Authorization Expiration D	ale: 5/0/2025

Harnett County Department of Public Health Site Sketch

Property Location:	3 Sunni	1 brook Ln				
Issued To: Mckeo	tlames	Subdivision _	Octement		Lo	t# 301
Authorized State Agent:	but ,	ad 1845-I		Date: _	5/6	2020

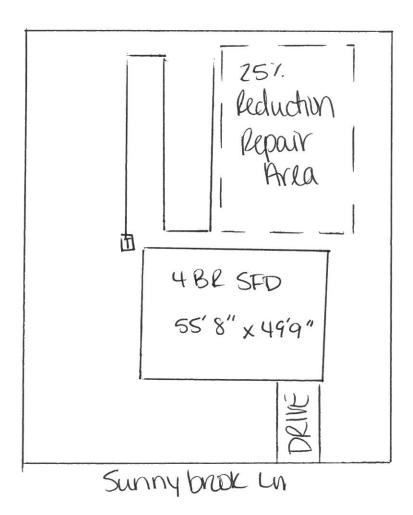

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.