

Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

SN 1715

ISSUED TO: TAYLOR SERVICES & CONST.

PROPERTY LOCATION: 79 MORRISON DR. (MEADOWLARK RD)
 SUBDIVISION: MEADOWLIDGE LOT # PARB

NEW REPAIR EXPANSION

Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: 3-BEDROOM 52'x48' SFD

Proposed Wastewater System Type: 25% REDUCTION

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: 6 max

Basement Yes No

Pump Required: Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well NA feet

Permit valid for: Five years No expiration

Permit conditions: _____

Authorized State Agent: [Signature]

Date: 05/29/2020

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules 1950, 1952, 1954, 1955, 1956, 1957, 1958, and 1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: TAYLOR SERVICES & CONST.

PROPERTY LOCATION: 79 MORRISON DR. (MEADOWLARK RD)
 SUBDIVISION: MEADOWLIDGE LOT # PARB

Facility Type: 3BR 52'x48' SFD New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** PUMP TO 25% REDUCTION (Initial) Wastewater Flow: 360 GPD

(See note below, if applicable)

PUMP TO 25% REDUCTION (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons

Pump Tank Size 1000 gallons

Number of trenches 4

Exact length of each trench 60 feet

Trenches shall be installed on contour at a

Maximum Trench Depth of: 22 inches

(Trench bottoms shall be level to +/-1/4"

in all directions)

Trench Spacing: 9 Feet on Center

Soil Cover: 10 inches

(Maximum soil cover shall not exceed

36" above the trench bottom)

Pump Requirements: _____ ft. TDH vs. _____ GPM

NA inches below pipe

Aggregate Depth: NA inches above pipe

Conditions: PUMP TO D-BOX EQUAL DISTRIBUTION

NA inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____

Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This

Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature]

Date: 05/29/2020

ANDREW CURRAN

Construction Authorization Expiration Date: 05/29/2025


Application # SD2005-0015

Harnett County Department of Public Health Site Sketch

Property Location: 79 MORRISON DR. (MEADOWCREEK RD - S1715)
Issued To: TARHELL SER. & CONST. Subdivision MEADOWRIDGE Lot # PAR B

Authorized State Agent: *Andrew Corrin* Date: 05/29/2020
ANDREW CORRIN

- * PUMP TO D-BOX EQUAL DISTRIBUTION
- * CONTOUR MAY VARY - USE TRENCH DEPTH TO COMPENSATE OFF CONTOUR INSTALL
- * TANK POSITIONING CAN VARY IF SETBACKS MAINTAINED

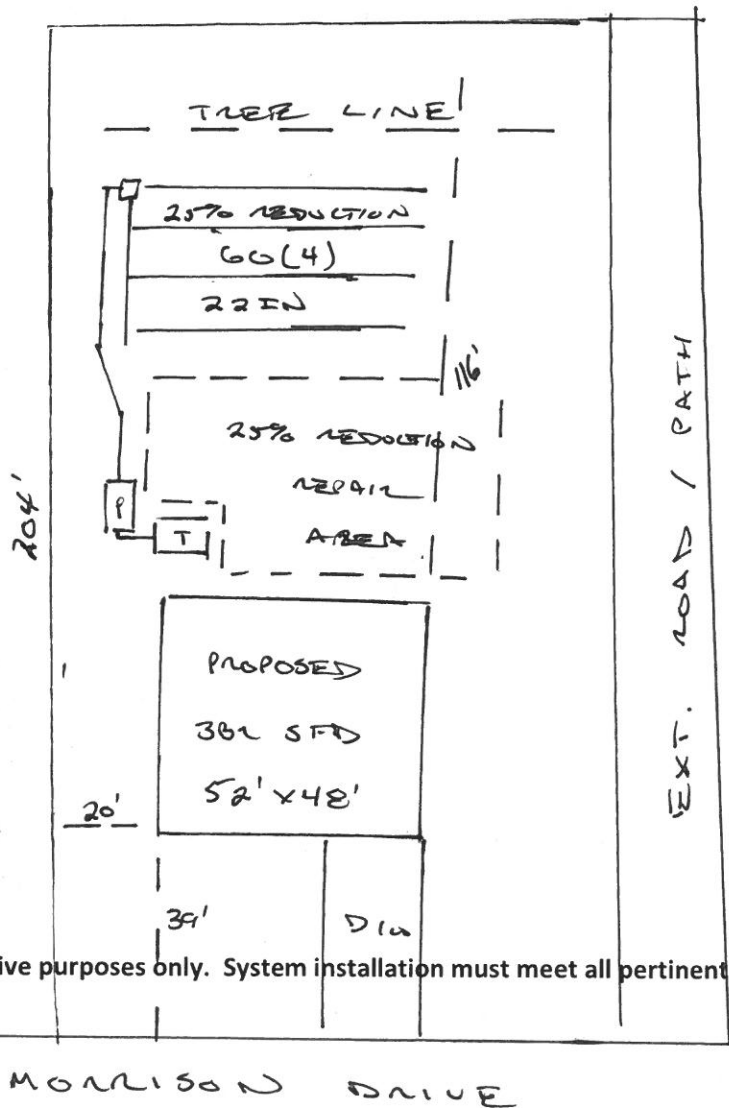

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.