

Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: BLAKE DENNING PROPERTY LOCATION: 597 HODGES CHAPEL RD (SR 1709)
 SUBDIVISION _____ LOT # _____
 NEW REPAIR EXPANSION
 Type of Structure: 3 BEDROOM 80' X 80' SFS
 Proposed Wastewater System Type: 25% REDUCTION SIS.
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well NA feet
 Permit conditions: _____ Permit valid for: Five years
 No expiration

Authorized State Agent: [Signature] Date: 07/21/2020 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958 and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: BLAKE DENNING PROPERTY LOCATION: 597 HODGES CHAPEL RD (SR 1709)
 SUBDIVISION _____ LOT # _____
 Facility Type: 3 BR 80' X 80' SFS New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable
PUMP TO 25% RED. SIS - (Repair)
Installation Requirements/Conditions
 Number of trenches 3
 Septic Tank Size 1000 gallons Exact length of each trench 100 feet Trench Spacing: 9 Feet on Center
 Pump Tank Size _____ gallons Trenches shall be installed on contour at a Soil Cover: 16 inches
 Maximum Trench Depth of: 28 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
 in all directions
 Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: NA inches below pipe
NA inches above pipe
 Conditions: GRAVITY TO D-BOX EQUAL DISTRIBUTION NA inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
 Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 07/21/2020
ANDREW CORN Construction Authorization Expiration Date: 07/21/2025

Application # SFD 2005-0051


Harnett County Department of Public Health Site Sketch

Property Location: 577 HODGES CHAPEL RD (SFL 1705)

Issued To: BLAKE DENNING Subdivision _____ Lot # _____

Authorized State Agent: Andrew Corbin Date: 07/21/2020

- * GRAVITY TO D-BOX EQUAL DISTRIBUTION
- * SYS. FLAGGED ONSITE
- * APPLICANT REQ. FRONT YARD INSTALL
- * PLUMBING AND TANK SHALL BE INSTALLED SHALLOW TO ALLOW FALL TO LINES
- * SIDE YARD INSTALL MAY BE REQUIRED IF FALL REQUIREMENTS CANNOT BE MAINTAINED

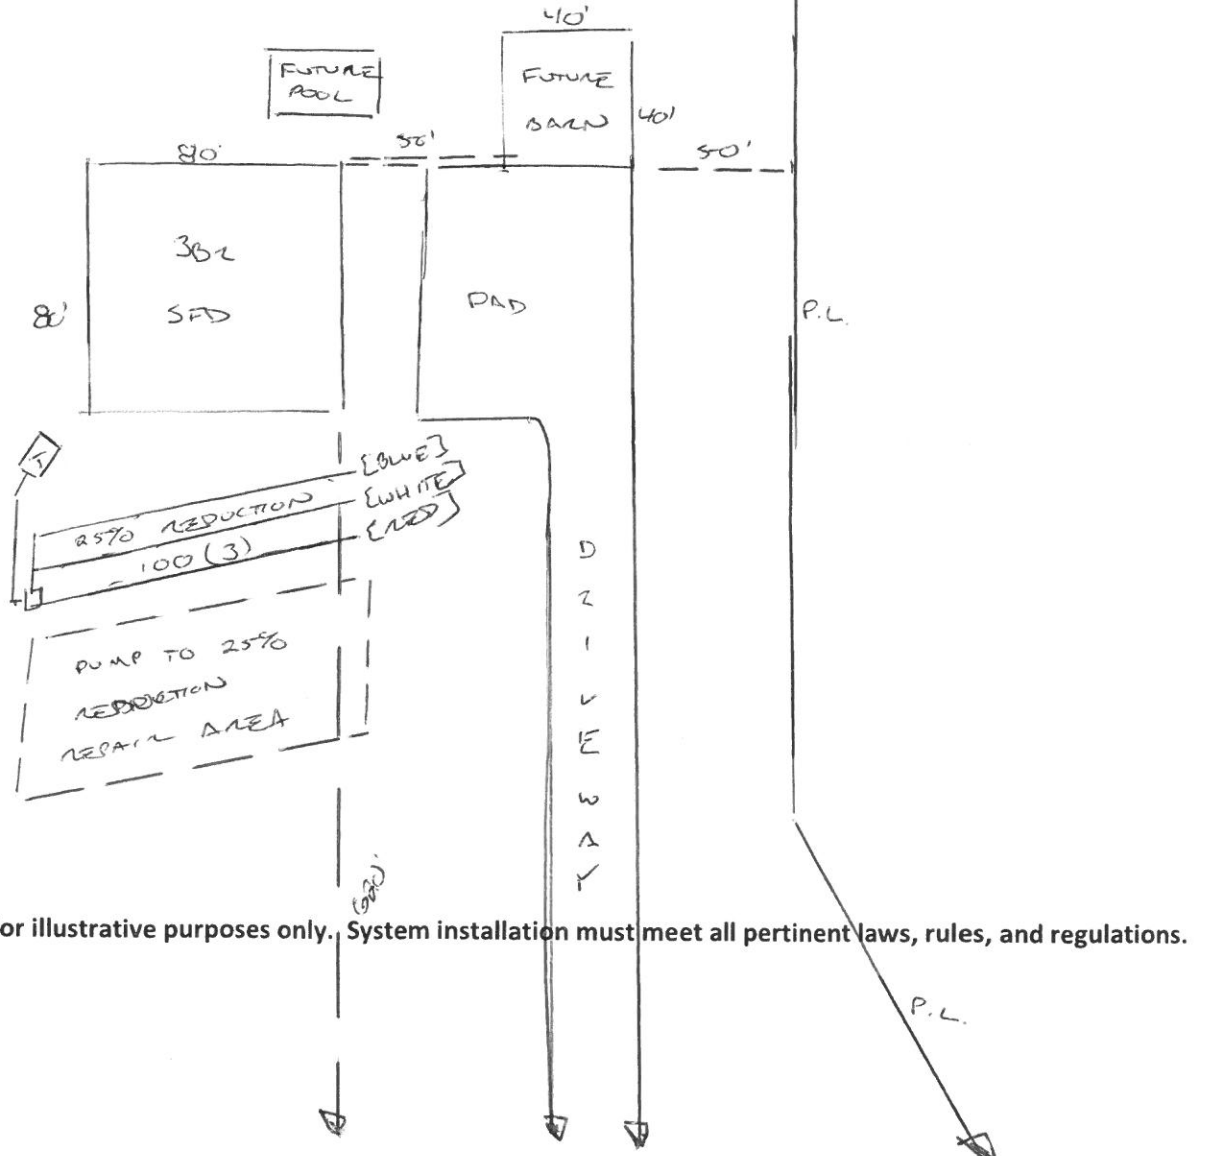

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.