


**Avery Pond**  
**Lot #122**

3-Bedroom Home (360 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	Yellow			4.0	98	110	100
2	Red			4.6	97.4	112	100
3	White			5	97	117	100
4	Blue			5.5	96.5	136	100
5	Orange			6.1		115	100
6	Pink			6.5		100	100
Total						365	300

	<u>System</u>	<u>Repair</u>
	Lines 1-3	Lines 4-6
<b>System Type</b>	Accepted Status System	Accepted Status System
	EZ-FLOW	EZ-FLOW
Suggested Soil LTAR	0.40	0.40
<b>Total Line Length</b>	300	300
<b>Square Footage</b>	900	900
<b>Proposed Trench Bottom</b>	24"	24"
<b>Distribution Method</b>	Gravity to D-Box	Gravity to D-Box

# Avery Pond 3-Bedroom Septic Proposal Lot #122

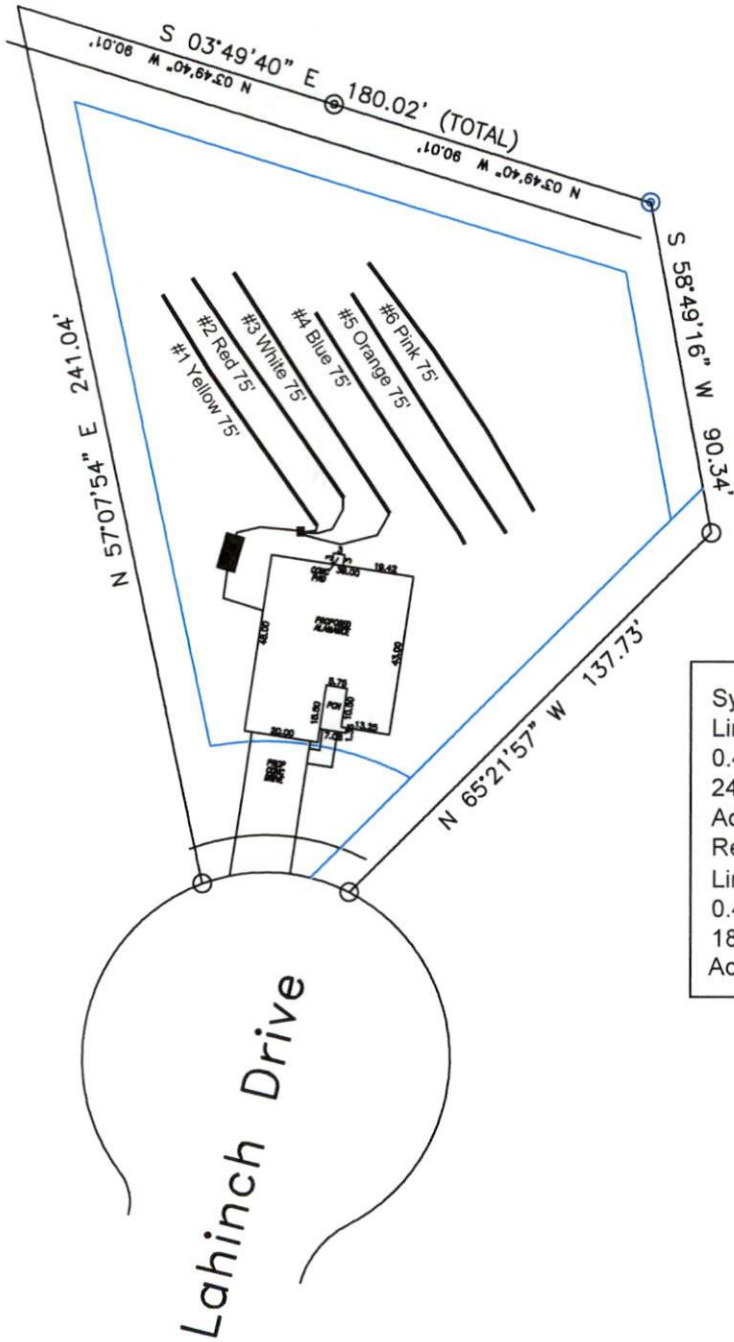

122

System: Gravity D-Box
Lines: 1-3 (225')
0.4 LTAR
24" Trench Bottom
Accepted Status System
Repair: Pressure Manifold
Lines: 4-6 (225')
0.4 LTAR
18-24" Trench Bottom
Accepted Status System

GRAPHIC SCALE  
1" = 50'



Soil Consulting
919-414-6761
Job #708