

Avery Pond

Lot #121

3-Bedroom Home (360 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	Red			2.9	99.1	135	120
2	White			3.2	98.8	135	120
3	Blue			3.7	98.3	135	120
4	Orange			4.1	97.9	135	120
Total						405	360

System

Repair

Lines 1-2

Lines 3-4

System Type

Accepted Status System
EZ-FLOW

Accepted Status System
EZ-FLOW

Suggested Soil LTAR

0.40

0.40

Total Line Length

240

240

Square Footage

720

720

Proposed Trench Bottom

24"

24"


Distribution Method

Gravity to D-Box

Gravity to D-Box

Avery Pond 3-Bedroom Septic Proposal Lot #121

121

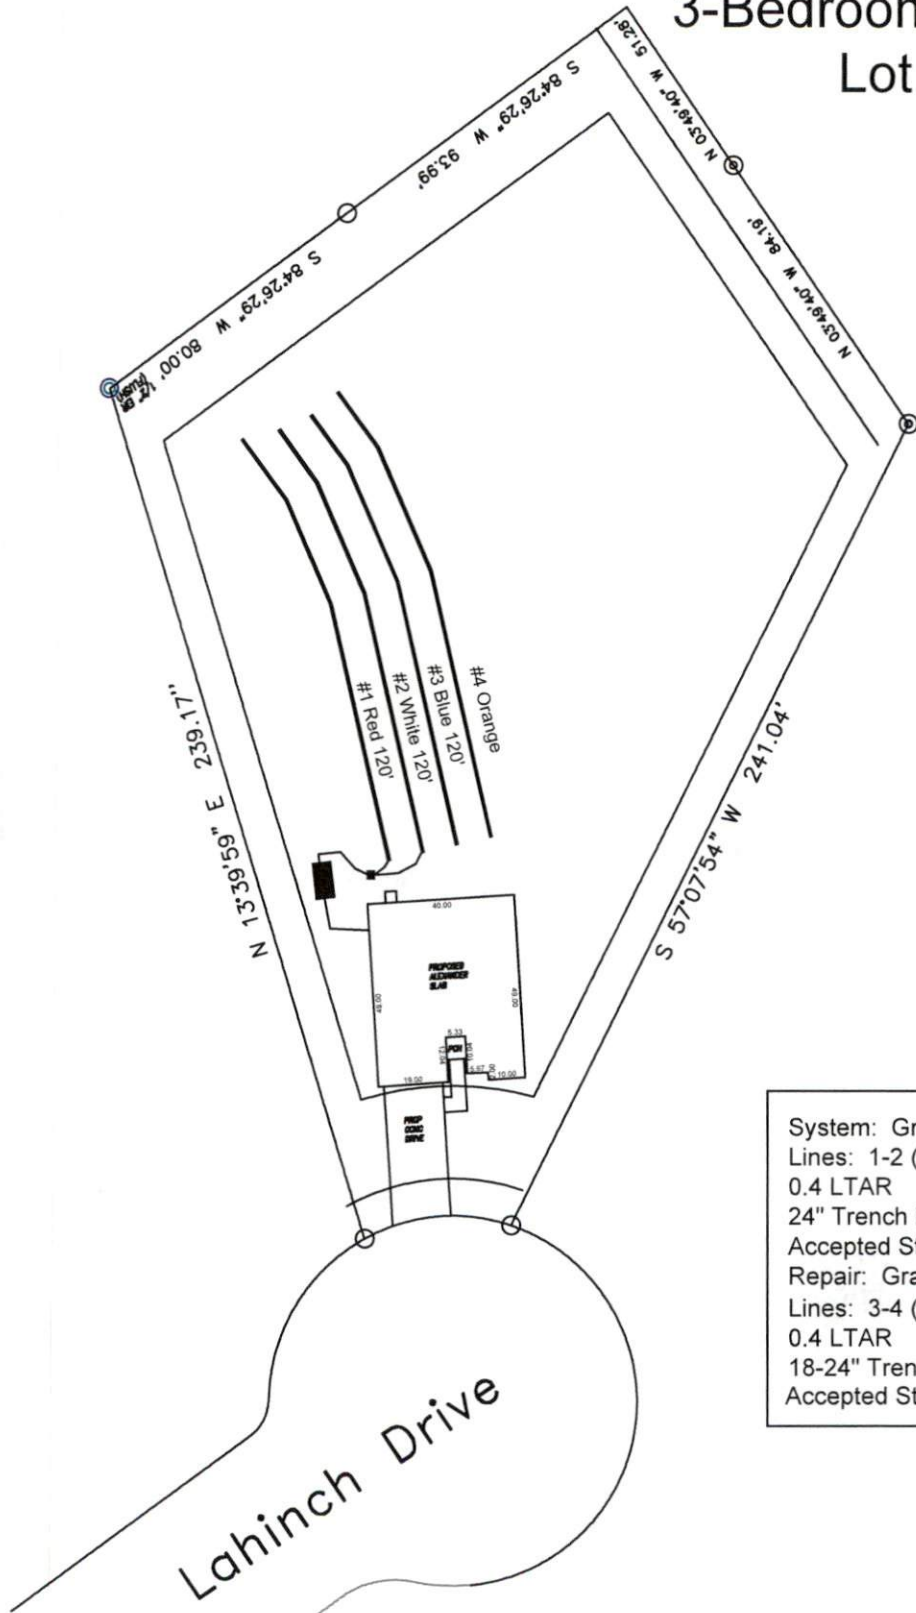

System: Gravity to D-Box
 Lines: 1-2 (240')
 0.4 LTAR
 24" Trench Bottom
 Accepted Status System
 Repair: Gravity to D-Box
 Lines: 3-4 (240')
 0.4 LTAR
 18-24" Trench Bottom
 Accepted Status System

Lahinch Drive

GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #708