


**Avery Pond**  
**Lot #117**

3-Bedroom Home (360 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	White			3.2	98.8	60	60
2	Red			3.3	98.7	60	60
3	Pink			3.5	98.5	60	60
4	Yellow			3.6	98.4	60	60
5	Orange			3.8	98.2	60	60
6	B			4	98	60	60
7	White			4.2	97.8	60	60
8	Red			4.4	97.6	60	60
Total						240	240


	<u>System</u>	<u>Repair</u>
	Lines 5-8	Lines 1-4
<b>System Type</b>	Accepted Status System EZ-FLOW	Accepted Status System EZ-FLOW
Suggested Soil LTAR	0.40	0.40
<b>Total Line Length</b>	240	240
<b>Square Footage</b>	720	720
<b>Proposed Trench Bottom</b>	24"	24"
<b>Distribution Method</b>	Pump to D-Box	Pump to D-Box

# Avery Pond 3-Bedroom Septic Proposal Lot #117

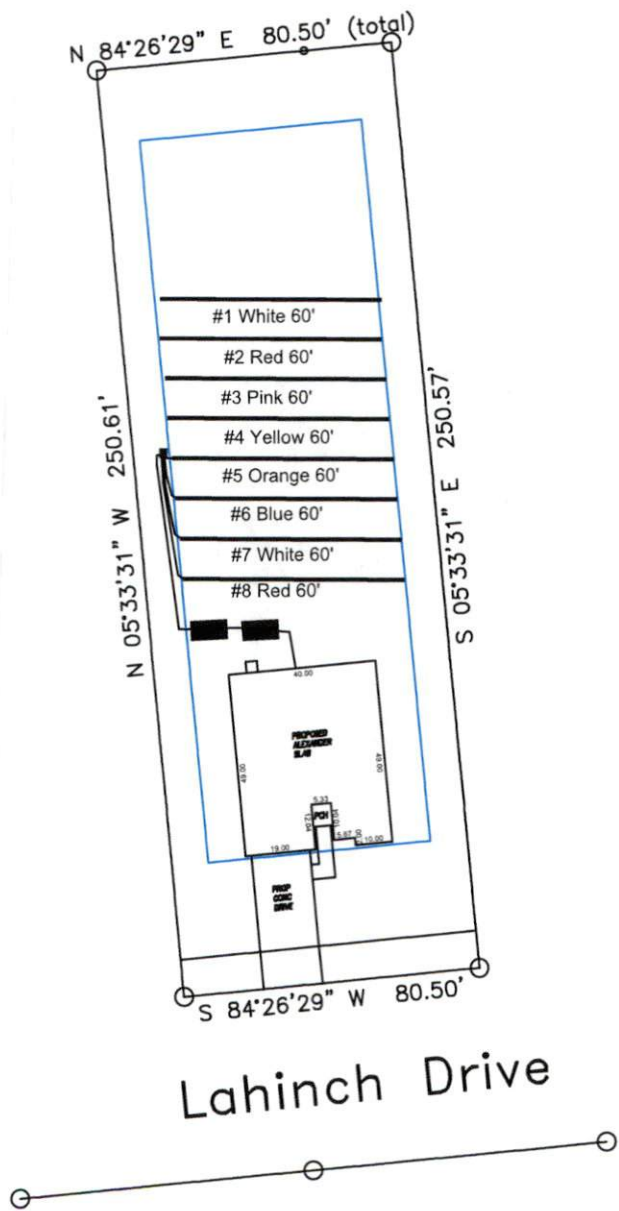

117

System: Pump to D-Box  
 Lines: 5-8 (240')  
 0.4 LTAR  
 24" Trench Bottom  
 Accepted Status System  
 Repair: Pressure Manifold  
 Lines: 1-4 (240')  
 0.4 LTAR  
 24" Trench Bottom  
 Accepted Status System

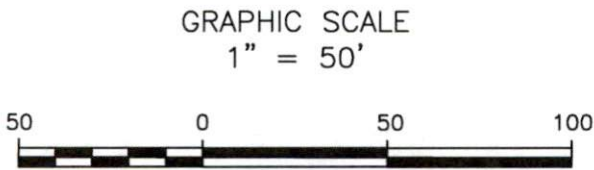

Adams  
 Soil Consulting  
 919-414-6761  
 Job #708