


**Avery Pond**  
**Lot #123**

3-Bedroom Home (360 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	Orange			3.3	98.7	60	60
2	Blue			3.8	98.2	68	60
3	Red			4.3	97.7	70	60
4	Pink			4.8	97.2	74	60
5	White			5.6	96.4	75	60
6	Yellow			5.9	96.1	72	60
7	Orange			6.7	95.3	71	60
8	Blue			7.3	94.7	71	60
Total						212	180

	<u>System</u>	<u>Repair</u>
	Lines 1-4	Lines 5-8
<b>System Type</b>	Accepted Status System EZ-FLOW	Accepted Status System EZ-FLOW
Suggested Soil LTAR	0.40	0.40
<b>Total Line Length</b>	240	240
<b>Square Footage</b>	720	720
<b>Proposed Trench Bottom</b>	24"	24"
<b>Distribution Method</b>	Gravity to D-Box	Gravity to D-Box

# Avery Pond 3-Bedroom Septic Proposal Lot #123

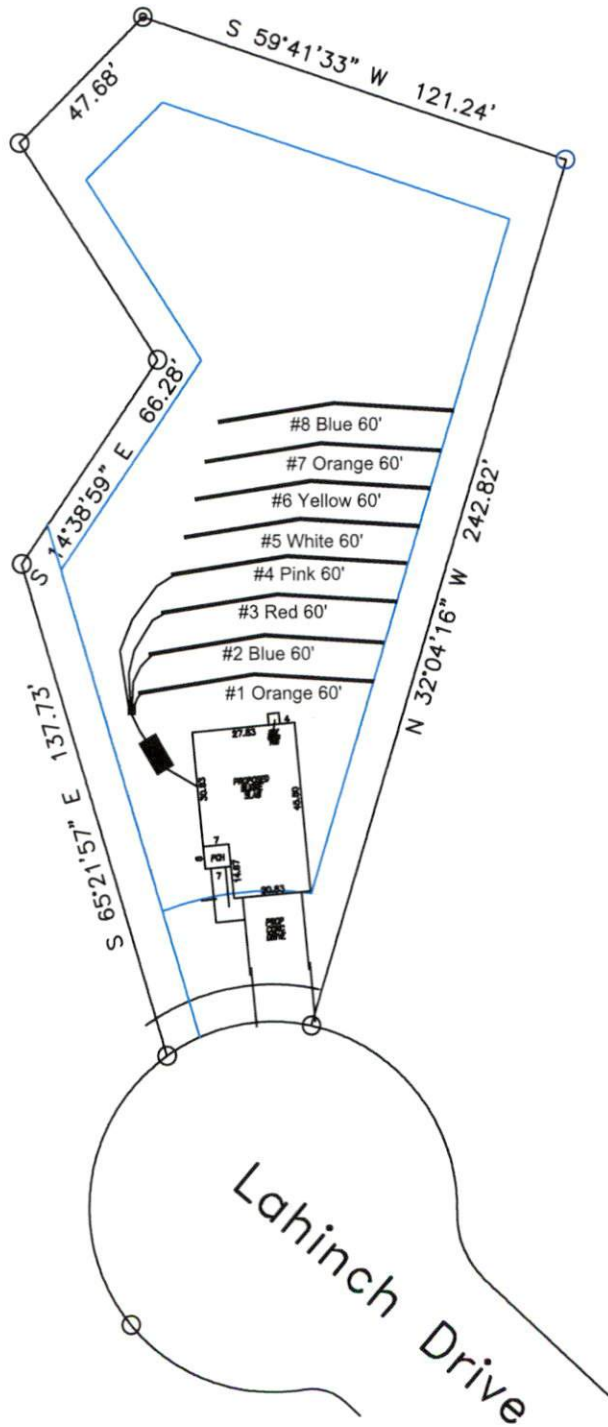

123

System: Gravity D-Box
Lines: 1-4 (240')
0.4 LTAR
24" Trench Bottom
Accepted Status System
Repair: Pressure Manifold
Lines: 5-8 (240')
0.4 LTAR
18-24" Trench Bottom
Accepted Status System

GRAPHIC SCALE  
1" = 50'



Adams Soil Consulting 919-414-6761 Job #708
--