


Avery Pond
Lot #128

3-Bedroom Home (360 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	Blue			4.8	97.2	100	85
2	Yellow			5.9	96.1	150	85
3	Red			7	95	150	85
4	White			8	94	150	130
5	Pink			9	93	135	130
Total							

	<u>System</u>	<u>Repair</u>
	Lines 1-3	Lines 4-5
System Type	Accepted Status System EZ-FLOW	Accepted Status System EZ-FLOW
Suggested Soil LTAR	0.350	0.350
Total Line Length	255	260
Square Footage	765	780
Proposed Trench Bottom	24"	24"
Distribution Method	Gravity to D-Box	Gravity to D-Box

Avery Pond 3-Bedroom Septic Proposal Lot #128

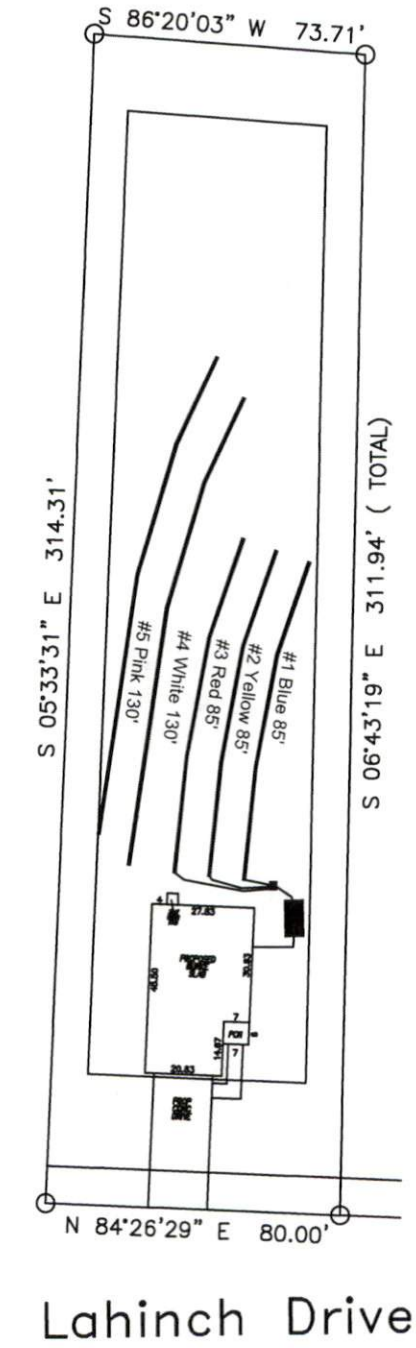

System: Gravity D-Box
 Lines: 1-3 (255')
 0.35 LTAR
 24" Trench Bottom
 Accepted Status System
 Repair: Gravity to D-Box
 Lines: 4-5 (260')
 0.35 LTAR
 18-24" Trench Bottom
 Accepted Status System

Lahinch Drive

GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #708