


Avery Pond
Lot #119

3-Bedroom Home (360 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	White			3.1	98.9	60	60
2	Red			3.3	98.7	60	60
3	Yellow			3.3	98.7	60	60
4	Pink			3.5	98.5	60	60
5	Orange			3.7	98.3	60	60
6	Blue			4	98	60	60
7	White			4.3	97.7	60	60
8	Red			4.7	97.3	60	60
Total						240	240

	<u>System</u>	<u>Repair</u>
	Lines 5-8	Lines 1-4
System Type	Accepted Status System EZ-FLOW	Accepted Status System EZ-FLOW
Suggested Soil LTAR	0.40	0.40
Total Line Length	240	240
Square Footage	720	720
Proposed Trench Bottom	24"	24"
Distribution Method	Pump to D-Box	Pump to D-Box


Avery Pond 3-Bedroom Septic Proposal Lot #119

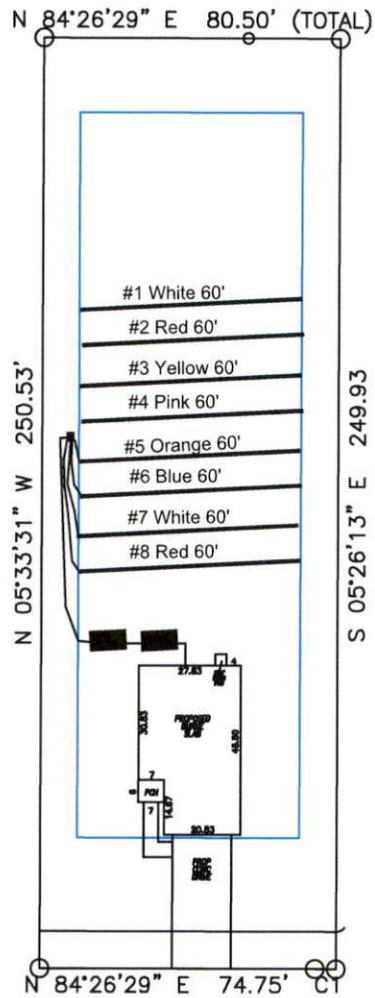

119

System: Pump to D-Box
 Lines: 5-8 (240')
 0.4 LTAR
 24" Trench Bottom
 Accepted Status System
 Repair: Pressure Manifold
 Lines: 1-4 (240')
 0.4 LTAR
 24" Trench Bottom
 Accepted Status System

Lahinch Drive



GRAPHIC SCALE
1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #708