SOUTHEASTERN SOIL & ENVIRONMENTAL ASSOC., INC.

PROPOSED SUBSURFACE WASTE DISPOSAL SYSTEM DETAIL SHEET

SUBDIVISION: Summerlin — LOT 63

INITIAL SYSTEM: APPROVED 25% RECUCTION (Grav) — REPAIR APPROVED 25% Reduction (GRAV)

DISTRIBUTION: SERIAL — DISTRIBUTION SERIAL

BENCHMARK: 100.0 — LOCATION BC Lot Iron 64/63

NO. BEDROOMS: (3) — LTAR 0.4 gpd/ft²

	LINE	FLAG COLOR	ELEVATION	LENGTH
I	1	B	105.67	65
	2	Y	105.33	95
	3	B	105.00	110
	4a	Y	104.42	30
				300
R	4b	Y	104.42	75
	5	B	104.08	105
	6	Y	103.58	105
	7	B	103.33	65
				350 AVAIL

BY B.C. Rayner — DATE 07/16/2018

TYPICAL PROFILE

0-8 LS VFRI gran

8-30 SCL firm SBK

CR2 > 24"

THERE SHALL BE NO GRADING, CUTTING, LOGGING OR OTHER SOIL DISTURBANCE IN SEPTIC AREA

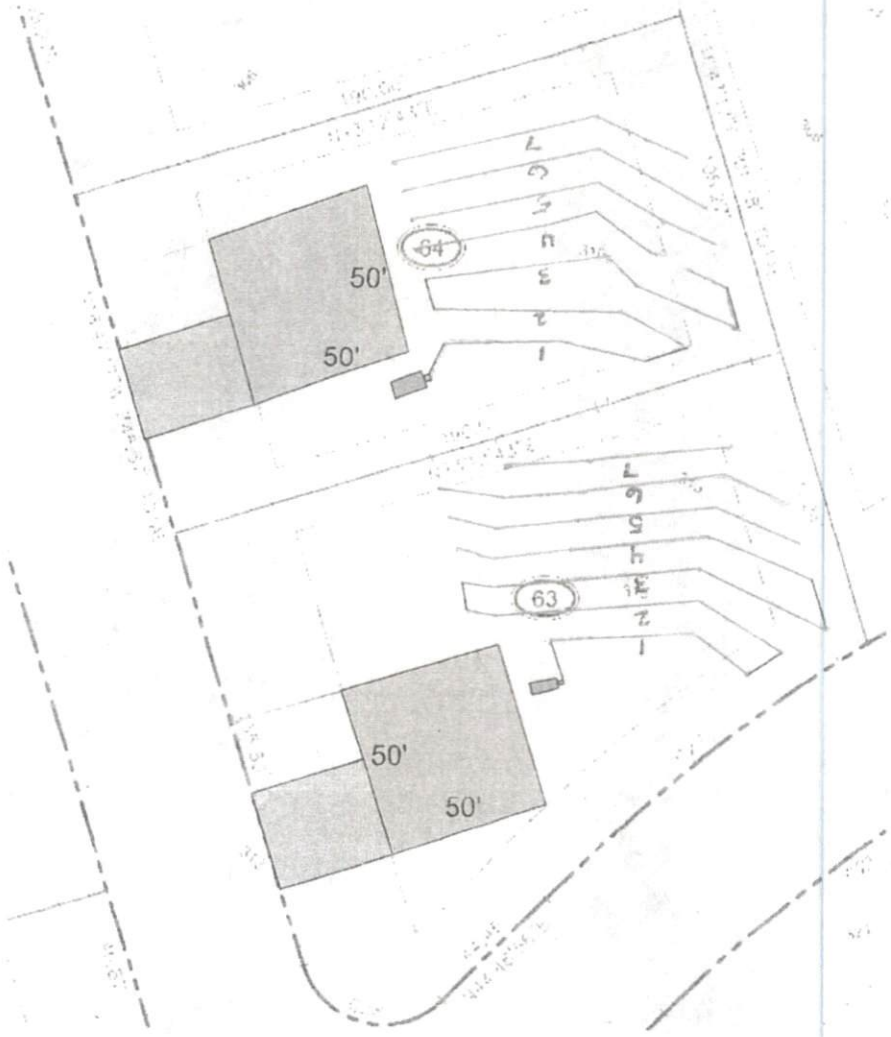
64
50'
50'
63
50'
50'