F02 See Boise literature for joist vertical load capacity.



F06 Load bearing wall above (stacked over wall below)



F07 See Boise literature for vertical load capacity.



F08



F09 Load bearing wall above (stacked over wall below)



F10



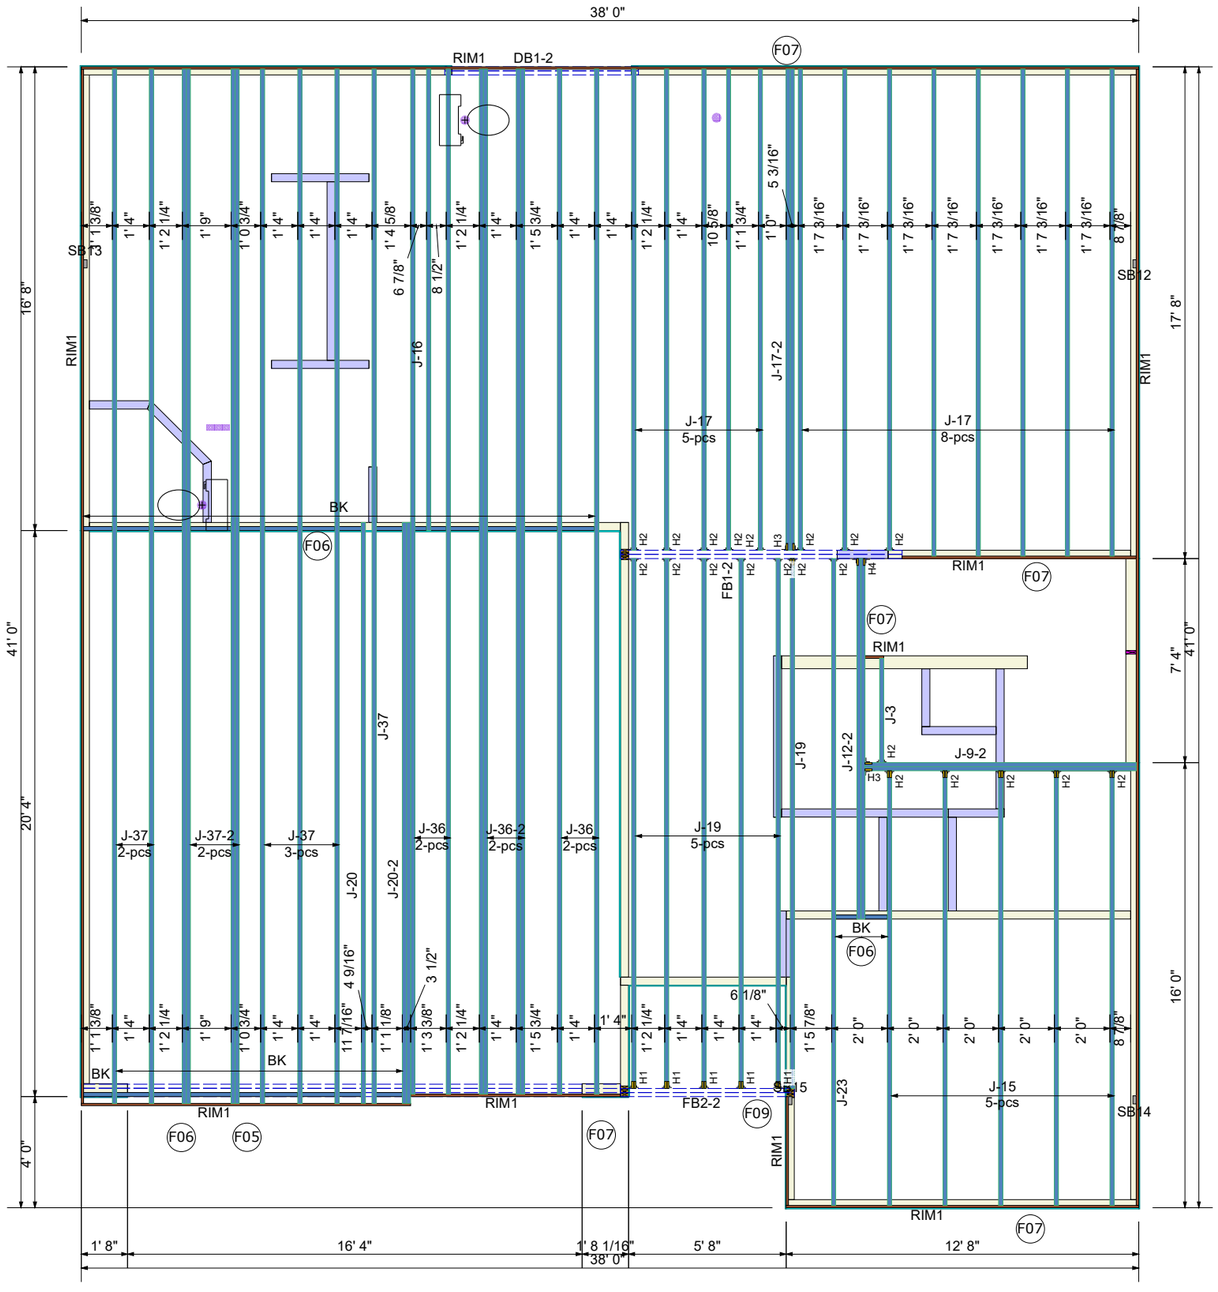

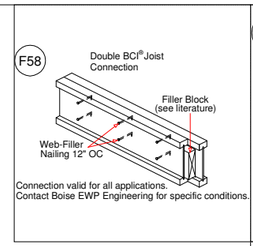

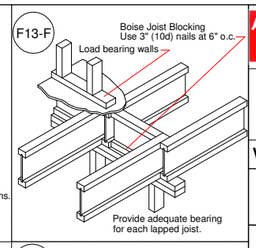

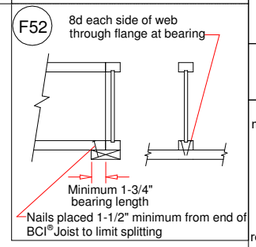

Products				
PlotID	Length	Product	Plies	Net Qty
J-37	37' 2"	14" BCI® 4500s-1.8	1	6
J-37-2	37' 2"	14" BCI® 4500s-1.8	2	4
J-36	36' 10"	14" BCI® 4500s-1.8	1	4
J-36-2	36' 10"	14" BCI® 4500s-1.8	2	4
J-23	23' 3"	14" BCI® 4500s-1.8	1	1
J-20	20' 10 1/2"	14" BCI® 4500s-1.8	1	1
J-20-2	20' 10 1/2"	14" BCI® 4500s-1.8	2	2
J-19	19' 0 1/2"	14" BCI® 4500s-1.8	1	6
J-17	17' 6"	14" BCI® 4500s-1.8	1	5
J-17	17' 3 1/2"	14" BCI® 4500s-1.8	1	8
J-17-2	17' 3 1/2"	14" BCI® 4500s-1.8	2	2
J-16	16' 7"	14" BCI® 4500s-1.8	1	1
J-15	15' 7 1/2"	14" BCI® 4500s-1.8	1	5
J-12-2	12' 11 1/2"	14" BCI® 4500s-1.8	2	2
J-9-2	9' 9"	14" BCI® 4500s-1.8	2	2
J-3	3' 9"	14" BCI® 4500s-1.8	1	1
DB1-2	8' 0"	1-3/4" x 9-1/4" VERSA-LAM® 2.0 3100 SP	2	2
FB1-2	12' 0"	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	2	2
FB2-2	8' 0"	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	2	2
GDH	20' 0"	1-3/4" x 18" VERSA-LAM® 2.0 3100 SP	3	3
RIM1	12' 0"	1" x 14" BC RIM BOARD OSB	1	14
BK	2' 0"	14" BCI® 4500s-1.8	1	14

Hangers			
PlotID	Qty	Manuf	Product
H1	5	Simpson	HU11
H2	21	Simpson	IUS 1.81/14
H3	2	Simpson	IUS 3.56/14
H4	1	Simpson	MIU 3.56/14

Builders FirstSource

Boise Cascade
Engineered Wood Products

www.BLDR.com

1135 Robeson St.
Fayetteville, NC 28305
V (910) 485-1111
F (910) 485-6475

7601 BOEING DRIVE
GREENSBORO, NC 27409
V: 336.884.5454

3189 NC HIGHWAY5
ABERDEEN NC 28315
V: 910.944.2516

This layout and associated materials list has been prepared based on project plans and/or information provided to Builders FirstSource (BFS). It remains the responsibility of the builder, architect, designer, or other responsible persons to review this information to assure that it is appropriate, accurate, complete and complies with applicable building codes.

GENERAL NOTES
1.) READ THE INSTALLATION GUIDE BEFORE FRAMING.
2.) ALL WALL SHOWN ARE LOAD BEARING UNLESS NOTES OTHERWISE WALLS NOT SHOWN HAVE BEEN CONSIDERED NON-LOAD BEARING
3.) UNLESS STATED OTHERWISE ALL CEILING & ROOF LOADS BRACE DIRECTLY TO LOAD BEARING WALLS SUPPORTED BY FOUNDATION
4.) CONTACT YOU LOCAL BUILDERS FIRSTSOURCE LOCATION BEFORE MAKING ANY ALTERATION & ADJUSTMENTS, FAILURE MAY RESULT IN COSTLY REPAIRS

H & H HOMES

PRELUDE GL

2nd FLOOR EWP PLACEMENT PLAN

Builders FirstSource, Central Carolina Markets

DATE: 3-27-18

JOB #

DRAWN BY: LEE ATKINS

SCALE: NTS

MINIMUM DESIGN DATA
LIVE LOAD 40 PSF
DEAD LOAD 10 PSF

TOTAL LOAD 50 PSF

STRESS DURATION = 100%

DEFLECTION CRITERIA
L/480 (MINIMUM)

ARCHITECTUAL PLAN DATE
11-16-17

REVISED ARCH. PLAN DATE
XX-XX-XX

SEALED PLAN DATE
12-27-17

Sheet
1 of 1