Harnett County Department of Public Health


Improvement Permit

A building permit cannot be issued with only an Improvement Permit

	PROPERTY LOCATION: 208 Kimb	orough Dr	
ISSUED TO: H&H Constructors	SUBDIVISION Woodshire	LOT # 190	
NEW REPAIR EXPANS Type of Structure: SFD 38'x42'	ION Site Improvements re	equired prior to Construction Authorization Issuance:	
Proposed Wastewater System Type: Pump to 25	5% Reduction		
Projected Daily Flow: 480 GPD			
Number of bedrooms: 4 Number of Occi	upants: 8max		
Basement Yes No			
	uired based on final location and elevations of facilities		
Type of Water Supply: Community Public Permit conditions:	Well Distance from well feet	Permit valid for: 🔀 Five years	
PAG			
Authorized State Agent::	REHS-I Date: 6/23/2020	SEE ATTACHED SITE SKETCH	
The issuance of this permit by the Health Department in mo way guar site is subject to revocation if the site plan, plat, or the intended use the Laws and Rules for Sewage Treatment and Disposal and to condition	changes. The Improvement Permit shall not be affected by a change in own	ecking with appropriate governing bodies in meeting their requirements. This tership of the site. This permit is subject to compliance with the provisions of	
	Construction Authorization		
	(Required for Building Permit)		
The construction and installation requirements of Rules .1950, .1952, . with the attached system layout.	1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references	into this permit and shall be met. Systems shall be installed in accordance	
ISSUED TO: H&H Constructors	PROPERTY LOCATION: 208 I		
Facility Types SED 38'v42'	SUBDIVISION Woodshire	LOT # <u>190</u>	
Facility Type: SFD 38'x42'	New DExpansion Repair		
	ctures? Yes No		
	% Reduction	(Initial) Wastewater Flow: 480 GPD	
(See note below, if applicable)	E0/ Daduation		
and the second s	5% Reduction (Repair)		
Installation Requirements/Conditions	Number of trenches 1		
Septic Tank Size 1000 gallons	Exact length of each trench 200 feet	Trench Spacing: 9 Feet on Center	
Pump Tank Size 1000 gallons	Trenches shall be installed on contour at a	Soil Cover: 6inches	
	Maximum Trench Depth of: 18-24 inches	(Maximum soil cover shall not exceed	
	(Trench bottoms shall be level to +/-1/4"	36" above the trench bottom)	
	in all directions)		
Pump Requirements:ft. TDH vs	GPM	inches below pipe	
		Aggregate Depth: inches above pipe	
Conditions:		inches total	
WATER LINES ANGLURING IRROR TRANSPORT			
WATER LINES (INCLUDING TRRIGATION) MUST I	BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR F	REPAIR AREA.	
NO UTILITIES ALLOWED IN INITIAL OR REPAIR C	PRAIN FIELD AREA.		
**If applicable: I understand the system type specified	t is different from the type specified on the application.	I accept the specifications of this permit.	
Owner/Legal Representative Signature:		Date:	
his Construction Authorization is subject to revocation if the site plan,	plat, or the intended use changes. The Construction Authorization shall not b	transferred when there is a change in ownership of the site. This	
onstruction Authorization is subject to compliance with the provisions o	f the Laws and Rules for Sewage Treatment and Disposal and to the condition	ons of this permit. SEE ATTACHED SITE SKETCH	
0 11	1.1		
Authorized State Agent:	LA REHS T Date	6/23/2020	
Construction Authorization Expiration Date: 6/23/2025			

Harnett County Department of Public Health Site Sketch

Property Location: 208 Ki MOUCLY DV		
Property Location: 208 KIMBOUGH DV Issued To: Halt CONSTRUCTOR'S gubdivision WOOCISHIVE		Lot # 190
Authorized State Agent: BACLA REHS-I	Date:	23 2020

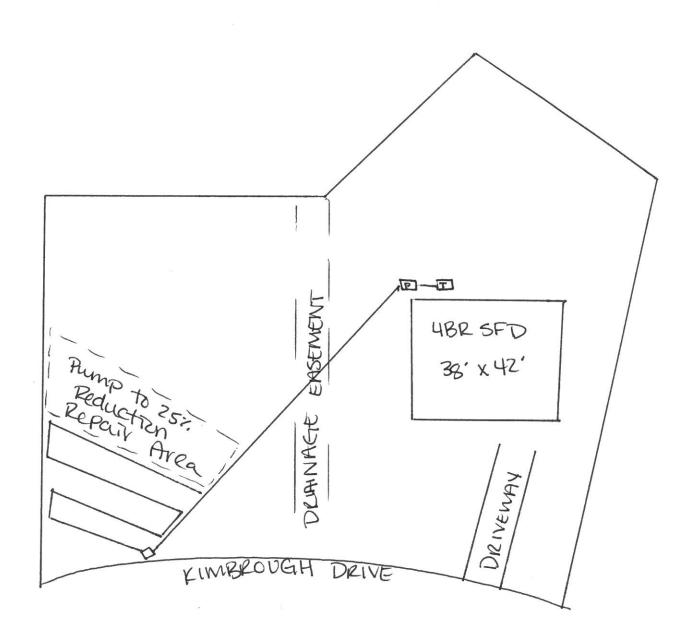

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.