


Avery Pond
Lot #156

3-Bedroom Home (360 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	Orange			4.8	97.2	70	65
2	Pink			4.3	97.7	70	65
3	Red			3.6	98.4	70	65
4	White			2.6	99.4	70	65
5	Blue			1.9	100.1	65	65
6	Orange			1.2	100.8	65	65
7	Pink			0.6	101.4	60	60
8	Yellow			0	102	60	60
Total							

	<u>System</u>	<u>Repair</u>
	Lines 1-4	Lines 5-8
System Type	Accepted Status System EZ-FLOW	Accepted Status System EZ-FLOW
Suggested Soil LTAR	0.350	0.375
Total Line Length	260	250
Square Footage	780	750
Proposed Trench Bottom	18-24"	18-24"
Distribution Method	Pump to D-Box	Pump to D-Box

Avery Pond 3-Bedroom Septic Proposal Lot #156

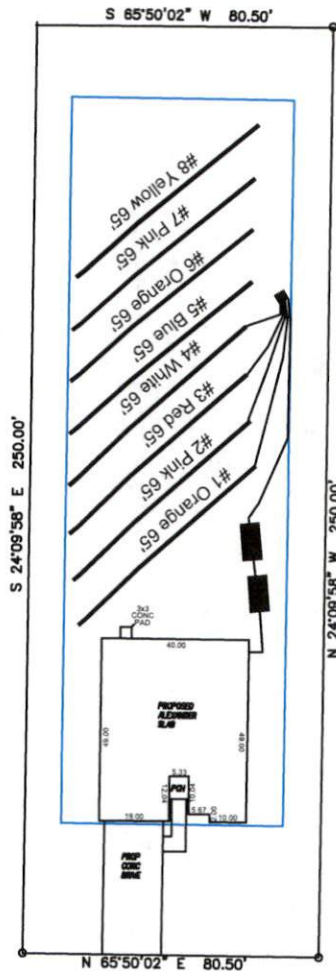

System: Pump to D-Box
 Lines: 1-4 (260')
 0.35 LTAR
 18-24" Trench Bottom
 Accepted Status System
 Repair: Pump to D-Box
 Lines: 5-8 (260')
 0.35 LTAR
 18-24" Trench Bottom
 Accepted Status System

Doonbeg Drive



GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #708