

**Avery Pond**

**Lot #116**


4-Bedroom Home (480 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	Yellow			2.7	99.3	60	60
2	Orange			2.9	99.1	60	60
3	White			3.2	98.8	60	60
4	Pink			3.4	98.6	60	60
5	Blue			3.5	98.5	60	60
6	Red			3.6	98.4	60	60
7	Yellow			3.8	98.2	60	60
8	Orange			3.9	98.1	60	60
9	White			4.1	97.9	60	60
10	Pink			4.3	97.7	60	60

Total

	<u>System</u>	<u>Repair</u>
	Lines 6-10	Lines 1-5
<b>System Type</b>	Accepted Status System EZ-FLOW	Accepted Status System EZ-FLOW
Suggested Soil LTAR	0.400	0.400
<b>Total Line Length</b>	300	300
<b>Square Footage</b>	900	900
<b>Proposed Trench Bottom</b>	24"	24"
<b>Distribution Method</b>	Pump to D-Box	Pump to D-Box

# Avery Pond 4-Bedroom Septic Proposal Lot #116

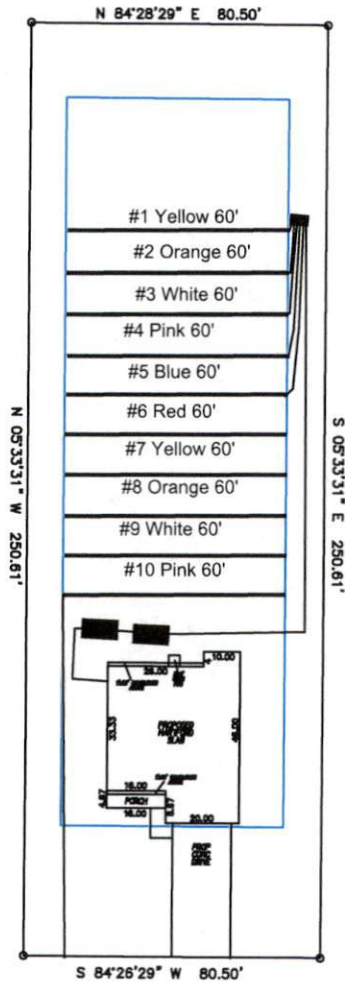

116

Lahinch Drive

System: Pump to D-Box  
 Lines: 6-10 (300')  
 0.4 LTAR  
 24" Trench Bottom  
 Accepted Status System  
 Repair: Pump to D-Box  
 Lines: 1-5 (300')  
 0.4 LTAR  
 24" Trench Bottom  
 Accepted Status System

GRAPHIC SCALE  
1" = 50'



Adams  
 Soil Consulting  
 919-414-6761  
 Job #708