


Avery Pond
Lot #114

4-Bedroom Home (480 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	Orange			3.2	98.8	120	100
2	Pink			3.2	98.8	120	100
3	Blue			3.3	98.7	120	100
4	White			3.3	98.7	120	100
5	Red			3.4	98.6	120	100
6	Yellow			3.4	98.6	120	100
Total							

	<u>System</u>	<u>Repair</u>
	Lines 1-3	Lines 4-6
System Type	Accepted Status System	Accepted Status System
	EZ-FLOW	EZ-FLOW
Suggested Soil LTAR	0.40	0.40
Total Line Length	300	300
Square Footage	900	900
Proposed Trench Bottom	18-24"	18-24"
Distribution Method	Gravity to D-Box	Gravity to D-Box

Avery Pond 4-Bedroom Septic Proposal Lot #114

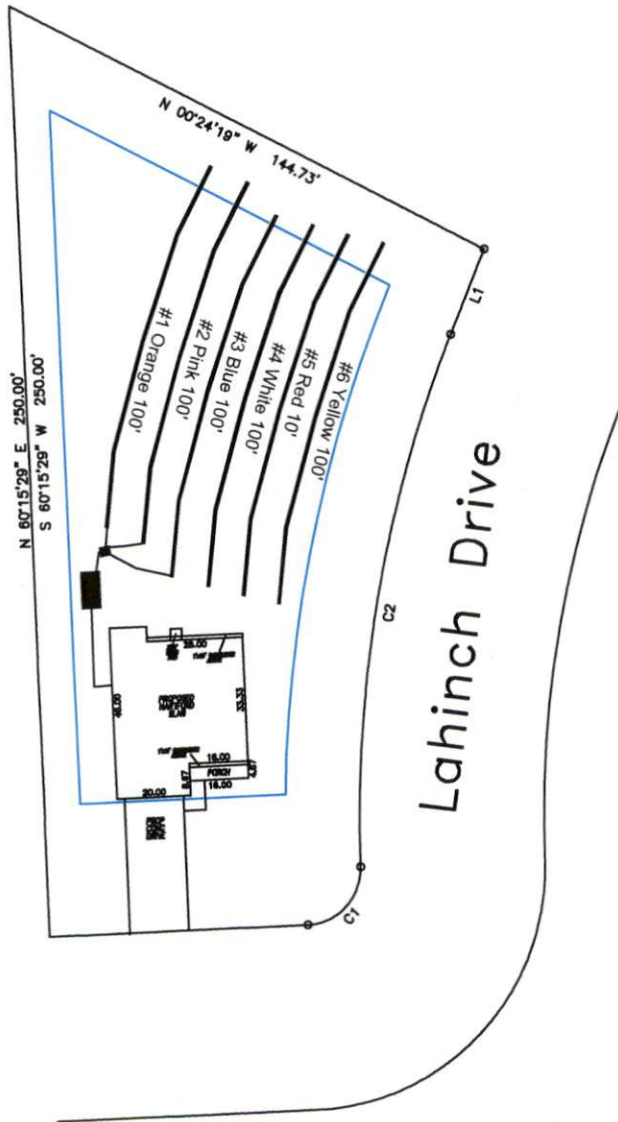

System: Gravity to D-Box
 Lines: 1-3 (300')
 0.4 LTAR
 18-24" Trench Bottom
 Accepted Status System
 Repair: Gravity to D-Box
 Lines: 4-6 (300')
 0.4 LTAR
 18-24" Trench Bottom
 Accepted Status System

GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #708