


Avery Pond
Lot #113

3-Bedroom Home (360 gal./day)

<u>LINE #</u>	<u>COLOR</u>	<u>BS</u>	<u>HI</u>	<u>FS</u>	<u>ELEVATION</u>	<u>LINE LENGTH</u>	<u>Design Length</u>
TBM		2.0		100.0		<u>in field</u>	<u>installation</u>
INST. 1			102.0				
1	Orange			3.4	98.6	150	115
2	Pink			3.5	98.5	150	115
3	Blue			3.6	98.4	150	115
4	White			3.7	98.3	150	115
Total							

	<u>System</u>	<u>Repair</u>
	Lines 1-2	Lines 3-4
System Type	Accepted Status System EZ-FLOW	Accepted Status System EZ-FLOW
Suggested Soil LTAR	0.40	0.40
Total Line Length	225	225
Square Footage	675	675
Proposed Trench Bottom	18-24"	18-24"
Distribution Method	Gravity to D-Box	Gravity to D-Box

Avery Pond 3-Bedroom Septic Proposal Lot #113

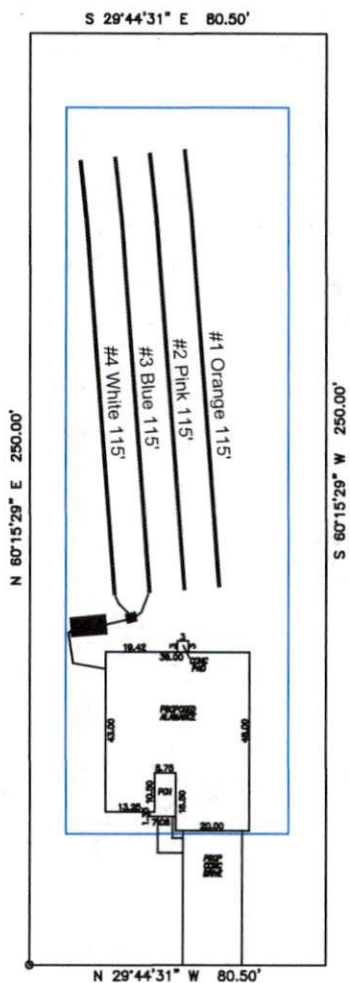

System: Gravity to D-Box
 Lines: 1-2 (225')
 0.4 LTAR
 18-24" Trench Bottom
 Accepted Status System
 Repair: Gravity to D-Box
 Lines: 3-4 (225')
 0.4 LTAR
 18-24" Trench Bottom
 Accepted Status System

Avery Pond Drive

GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #708