

App# B005

2006-  
~~0000~~  
58

# Harnett County Department of Public Health Improvement Permit

A building permit cannot be issued with only an Improvement Permit

6075  
MC

ISSUED TO: Chase Allen Banker PROPERTY LOCATION: 5N1229 McDougald Rd  
 NEW  REPAIR  EXPANSION  SUBDIVISION \_\_\_\_\_ LOT # \_\_\_\_\_  
 Type of Structure: SFD Site Improvements required prior to Construction Authorization Issuance: \_\_\_\_\_  
 Proposed Wastewater System Type: 75% REDUCTION  
 Projected Daily Flow: 480 GPD  
 Number of bedrooms: 4 Number of Occupants: 8 max  
 Basement  Yes  No  
 Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
 Type of Water Supply:  Community  Public  Well Distance from well 100' off feet  
 Permit valid for:  Five years  No expiration  
 Permit conditions: Boned

Authorized State Agent: James E. Marshant Date: 10-8-20 SEE ATTACHED SITE SKETCH  
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

6075

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Chase Allen Banker PROPERTY LOCATION: 5N1229 McDougald Rd  
 Facility Type: SFD SUBDIVISION \_\_\_\_\_ LOT # \_\_\_\_\_  
 Basement?  Yes  No Basement Fixtures?  Yes  No  
 Type of Wastewater System\*\* 75% REDUCTION SYSTEM (Initial) Wastewater Flow: 480 GPD  
 (See note below, if applicable)   
75%/50% REDUCTION (Repair)  
 Installation Requirements/Conditions  
 Septic Tank Size 1200 gallons Number of trenches 5  
 Pump Tank Size \_\_\_\_\_ gallons Exact length of each trench 60 feet Trench Spacing: 9 Feet on Center  
 Trenches shall be installed on contour at a Soil Cover: 6 inches  
 Maximum Trench Depth of: 24-16 inches (Maximum soil cover shall not exceed  
 (Trench bottoms shall be level to +/- 1/4" 36" above the trench bottom)  
 in all directions)  
 Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM Aggregate Depth: 6 inches below pipe  
2 inches above pipe  
 Conditions: FRENCH DRAIN REQUIRED AROUND SYSTEM. FOOTAGE TO BE DETERMINED IN CONSULTATION MEETING  
 WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.  
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.  
 Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Marshant Date: 10-8-20  
 Construction Authorization Expiration Date: 10-8-25

Application # 58 BIGGS 2006-00


Harnett County Department of Public Health  
Site Sketch

6075 McDougald RD

Property Location: 512 1229 McDougald RD

Issued To: CHASE ALLEN BANKER Subdivision \_\_\_\_\_ Lot # \_\_\_\_\_

Authorized State Agent: James E. Marshall # 72345 Date: 10-8-28

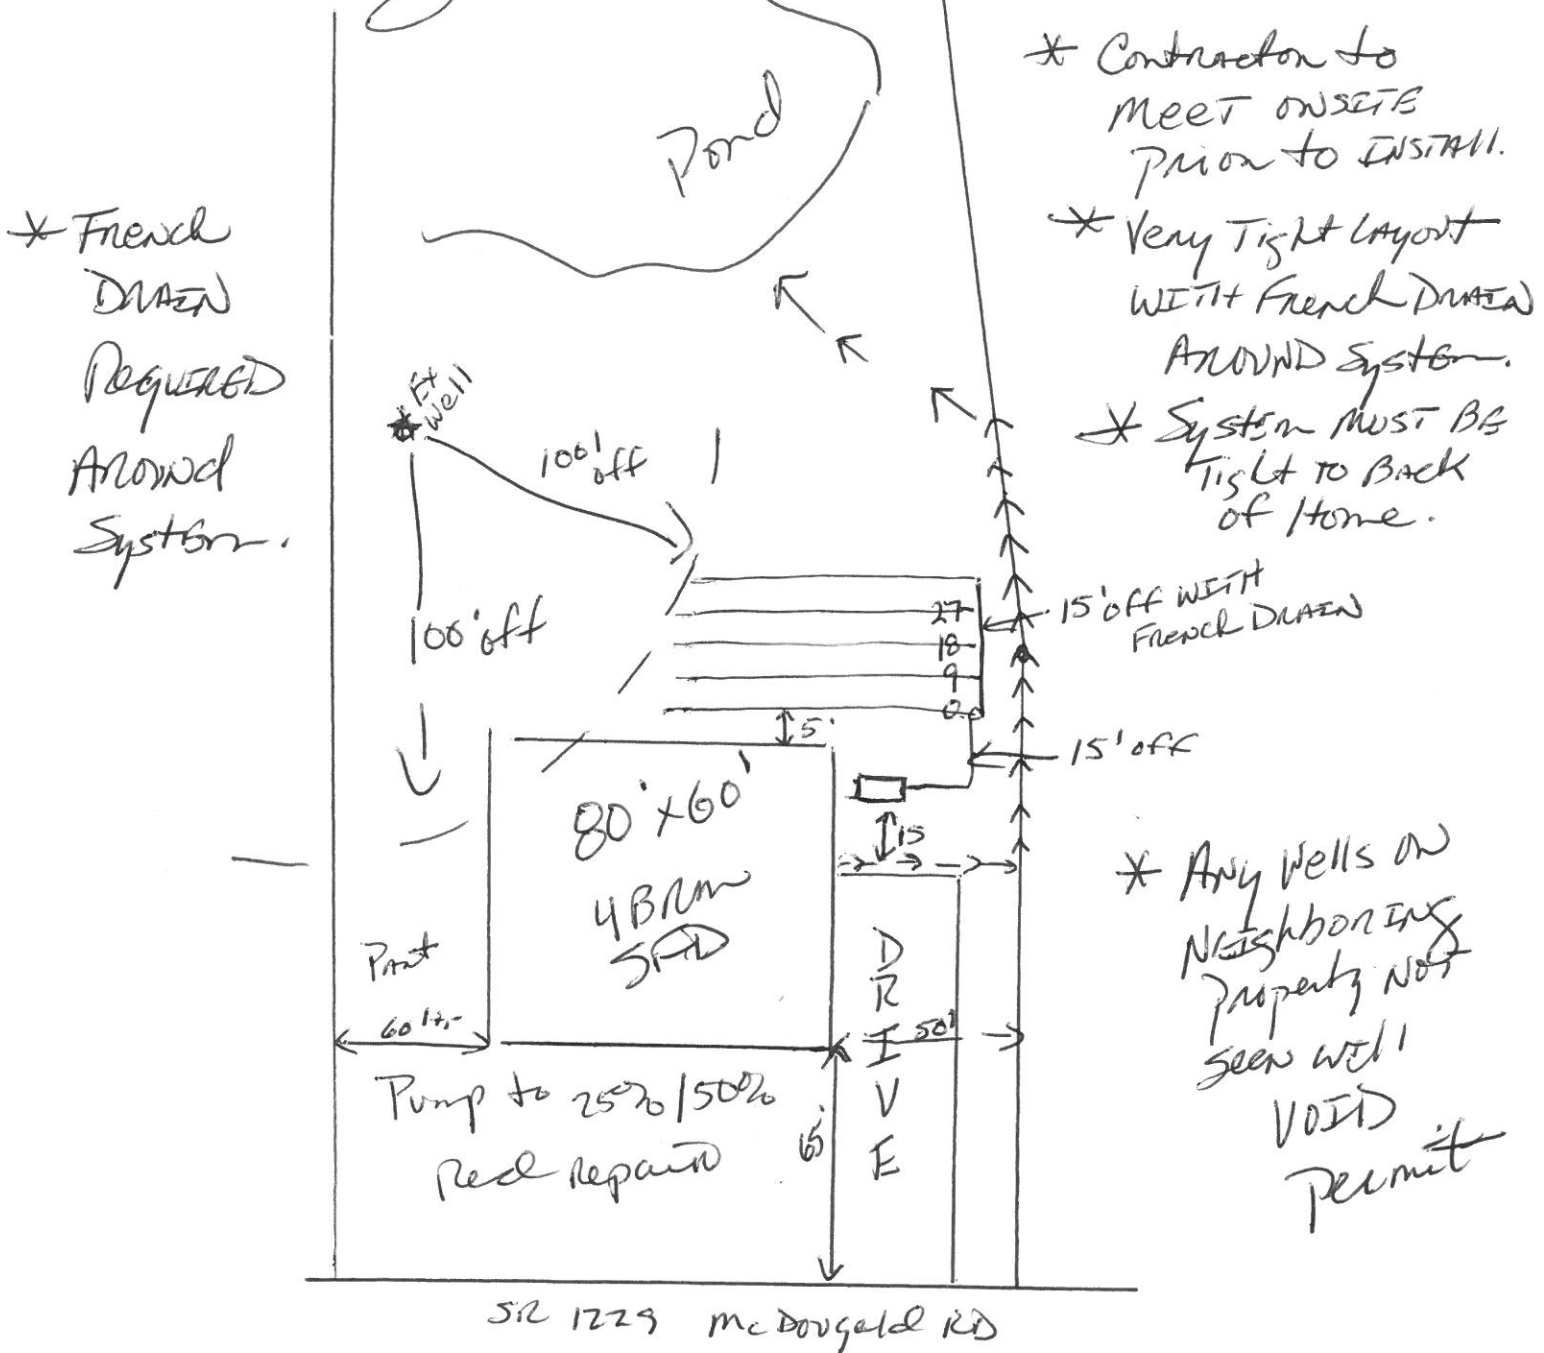

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.