
Olde Mill Village 3-Bedroom Septic Proposal Lot #12

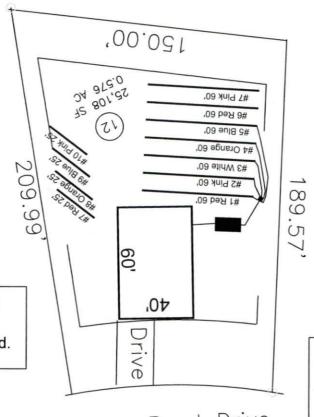

If plumbing is not sufficient a pump and tank may be required to septic drain field.

> Village Bend Drive 50' Public R/W

*Preliminary Design Not a Permit System: Gravity to D-Box Lines: 1-5 (300') 0.3 LTAR 24" Trench Bottom Accepted Status System Repair: Gravity to D-Box Lines: 6-10 (250') 0.3 LTAR 24 Trench Bottom T&J Panel - 50% Reduction System

 Adams
Soil Consulting
919-414-6761
Job #699