Harnett County Department of Public Health


Improvement Permit

A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: 72 Mitchell Manor Dr. (Mitchell Rd. - SR 15 ISSUED TO: Weaver Homes Inc. subdivision Mitchell Manor Site Improvements required prior to Construction Authorization Issuance: EXPANSION 🔲 REPAIR | Type of Structure: 34x54 sfd, 3 beds 2.5 baths Proposed Wastewater System Type: 25% Reduction Sys. Projected Daily Flow: 360 Number of bedrooms: 3__ Number of Occupants: 6 Basement Yes May be required based on final location and elevations of facilities ⊠ No Pump Required: Yes ★ Five years Type of Water Supply: Community Public Well Distance from well NA feet Permit valid for: No expiration Permit conditions: Authorized State Agent:

Date: Date: SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder of responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958. and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. ISSUED TO: Weaver Homes Inc. PROPERTY LOCATION: 72 Mitchell Manor Dr. (Mitchell Rd. - SR. SUBDIVISION Mitchell Manor Facility Type: 3434x54 sfd, 3 beds 2.5 t New Expansion Basement Fixtures? Yes No Basement? Yes Type of Wastewater System** 25% Reduction System (Initial) Wastewater Flow: 360 GPD (See note below, if applicable) Pump to 25% Reduction Sys. Number of trenches 1 Installation Requirements/Conditions Trench Spacing: 9 ___ Feet on Center Exact length of each trench 225 Septic Tank Size 1000 gallons Soil Cover: 12_ gallons Trenches shall be installed on contour at a Pump Tank Size (Maximum soil cover shall not exceed Maximum Trench Depth of: 24 inches (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) Pump Requirements: _____ ft. TDH vs. _ ___ inches below pipe Aggregate Depth: NA inches above pipe NA inches total WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. **If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This SEE ATTACHED SITE SKETCH Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. Authorized State Agent: ____ Construction Authorization Expiration Date: 04/04/2026

Harnett County Department of Public Health Site Sketch

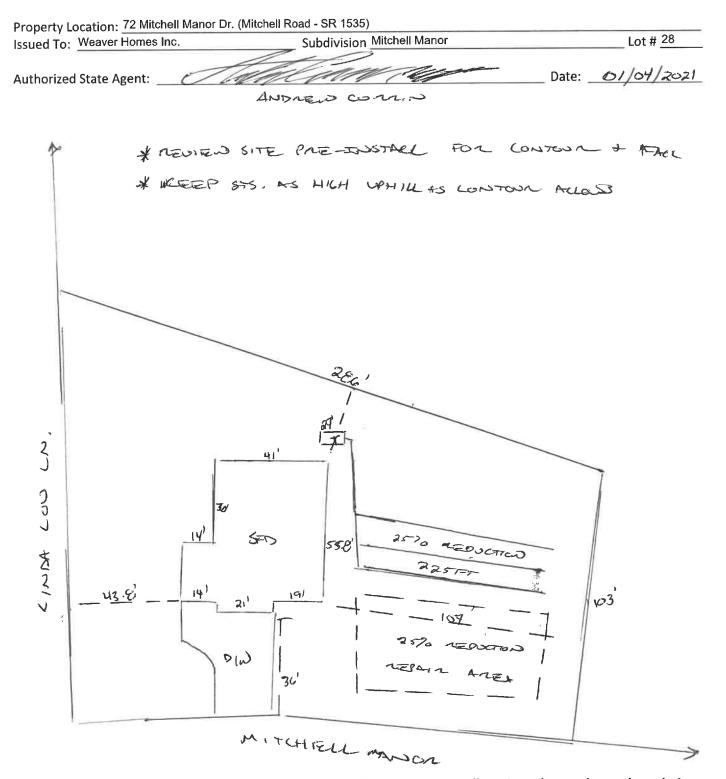

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.