

Harnett County Department of Public Health Improvement Permit

A building permit cannot be issued with only an Improvement Permit

SN 1535

ISSUED TO: SOUTHERN TOUCH HOMES

PROPERTY LOCATION: 72 MITCHELL MANOR DR (MITCHELL RD)
SUBDIVISION: MITCHELL MANOR LOT # 28

NEW REPAIR EXPANSION

Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: 3-BEDROOM 34'x54' SID

Proposed Wastewater System Type: 25% REDUCTION

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: 6 max

Basement Yes No

Pump Required: Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well NA feet

Permit valid for: Five years
 No expiration

Permit conditions:

Authorized State Agent: [Signature] Date: 11/17/2020

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: SOUTHERN TOUCH HOMES

PROPERTY LOCATION: 72 MITCHELL MANOR DR. (MITCHELL RD)
SUBDIVISION: MITCHELL MANOR LOT # 28

Facility Type: 360 34'x54' SID New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 360 GPD

(See note below, if applicable)

25% REDUCTION SYSTEM (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons

Pump Tank Size _____ gallons

Number of trenches 3 or 4

Exact length of each trench 75 or 60 feet

Trenches shall be installed on contour at a

Maximum Trench Depth of: 24 inches

(Trench bottoms shall be level to +1-1/4"

in all directions)

Trench Spacing: 9 Feet on Center

Soil Cover: 12 inches

(Maximum soil cover shall not exceed

36" above the trench bottom)

Pump Requirements: _____ ft. TDH vs. _____ GPM

Aggregate Depth: NA inches below pipe

NA inches above pipe

Conditions: GRAVITY TO D-BOX ELUKE DISTRIBUTION

NA inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This

Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 11/17/2020

ANDREW CURRAN

Construction Authorization Expiration Date: 11/17/2025

Application # SFD2009-0021

Harnett County Department of Public Health Site Sketch


Property Location: 72 MITCHELL MANOR DR. (MITCHELL RD - 521535)

Issued To: SOUTHERN TOUCH HOMES Subdivision MITCHELL MANOR Lot # 28

Authorized State Agent: [Signature] Date: 11/17/2020

ANDREW CURRIN

- * GRAVITY TO D-BOX EQUAL DISTRIBUTION
- * THREE (3) 75FT LINES OR FOUR (4) 60FT LINES

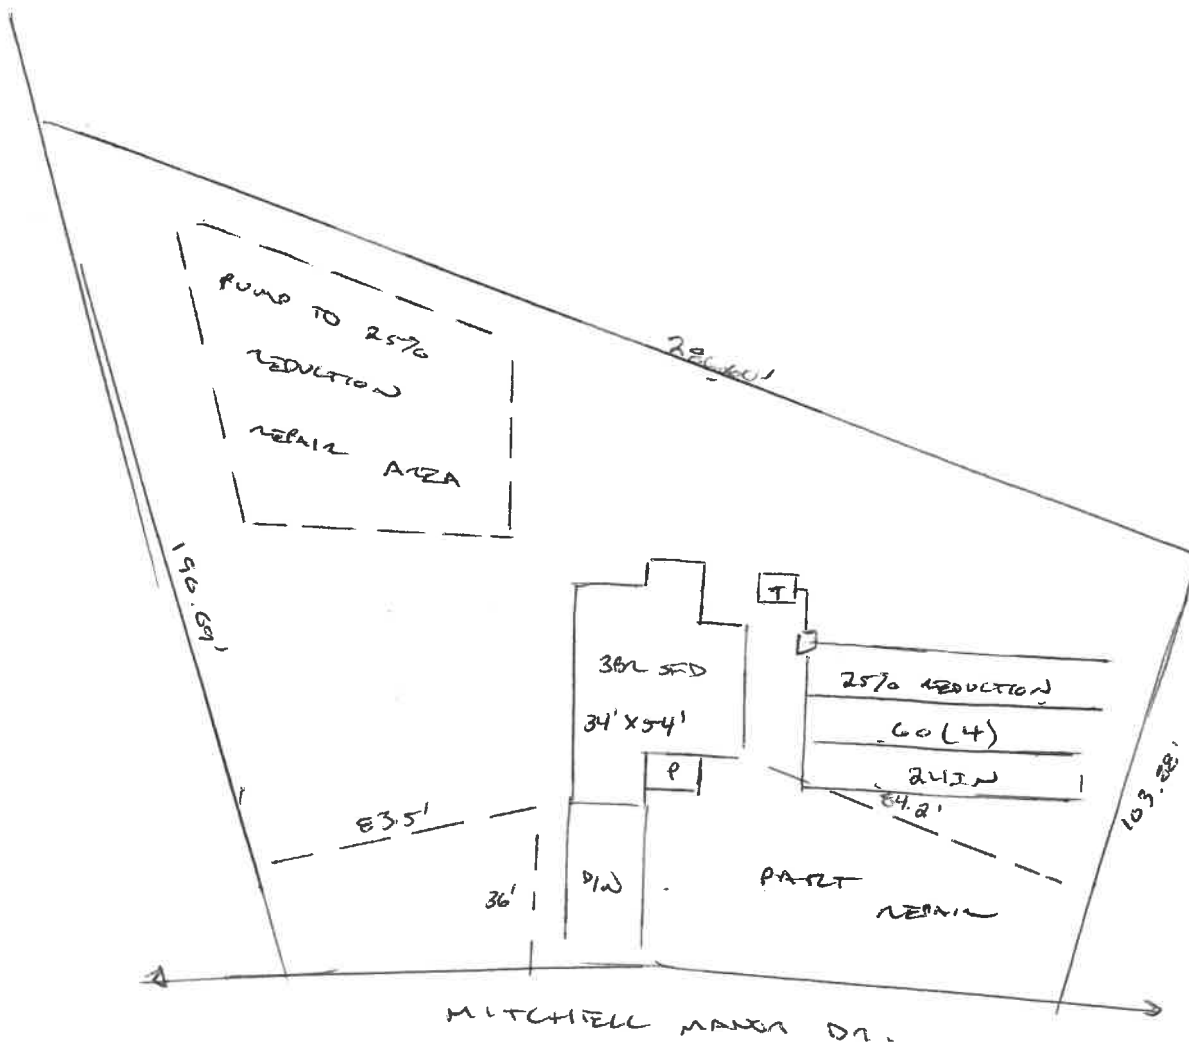

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.