SOUTHEASTERN SOIL & ENVIRONMENTAL ASSOC., INC.

PROPOSED SUBSURFACE WASTE DISPOSAL SYSTEM DETAIL SHEET

SUBDIVISION: Summerlin

LOT 404

INITIAL SYSTEM: GRAV APPROVED 25% REDUCTION

REPAIR GRAV Approved 25% Reduction

DISTRIBUTION: D-Box

DISTRIBUTION D-Box

BENCHMARK: 100.0

LOCATION Lot 43 L side 49/50 Rd

NO. BEDROOMS: 4

LTAR 0.4 gpd/ft2

	LINE	FLAG COLOR	ELEVATION	LENGTH
I	1	Y	101.33	75
	2	P	101.00	75
	3	Y	100.50	75
	4	P	100.00	75
				300
R	5	Y	99.50	75
	6	P	99.00	75
	7	Y	98.50	75
	8	P	97.00	75
				300

BY B.C. Raynor

DATE 07/16/2018

TYPICAL PROFILE

0-14 LS VFRE gran
14-30 SCL firm SBK
CR2 > 28"

THERE SHALL BE NO GRADING, CUTTING, LOGGING OR OTHER SOIL DISTURBANCE IN SEPTIC AREA

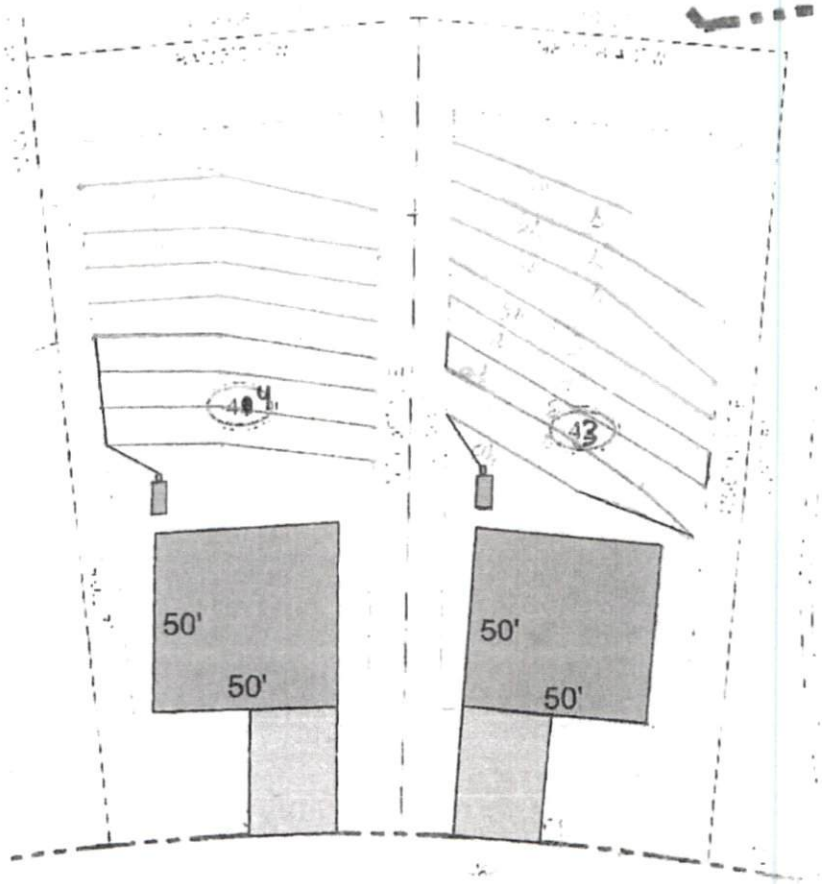
4
3
50'
50'
50'
50'