# **KENZIE** H&H HOMES - GARAGE LEFT

# PLAN REVISIONS

Ø1-10-19 COMPLETED CONSTRUCTION DOCUMENTS INCLUDING CLIENT REVIEW COMMENTS

Ø1-15-19 CLIENT BACK END COMMENTS

Ø1-24-19 MIRROR PLAN TO CREATE LEFT HAND VERSION

03-26-20 UPDATED ROOM NAMING PER HIH STANDARDS ADDED 2x6 WALL FLOOR FLANS 4 ELECTRICAL PLANS CHANGED ELEVATION 'A' ( 'C' TO 'A-1' ( 'C-1' ADDED ELEVATIONS 'A-2' ( 'C-2' CHAYGED ELEVATION 'B' TO ELEV. 'B-2' AND ADDED NEW ELEV. 'B-1' BROKE OUT OPTIONS FROM THE FLOOR FLANS AND MADE A SEPARATE PAGE FOR

ELEVATION ".	<b>4</b> "	
MAIN FLOOR	804	SF.
UPPER FLOOR	1154	SF.
TOTAL LIVING	1958	SF.
GARAGE	480	SF.
FRONT PORCH	82	SF.
PATIO	120	SF.
TOTAL SQ. FT.	2640	SF.
OPT. COV. PORCH	120	6F.
OPT. EXT. PORCH	160	SF.
OPT. I CAR GARAGE	240	SF.

ELEVATION "I	3"	
MAIN FLOOR	804	SF
UPPER FLOOR	1170	SF
TOTAL LIVING	1974	SF
GARAGE	480	SF
FRONT PORCH	83	SF
PATIO	120	SF
TOTAL SQ. FT.	2657	5F
OPT. COV. PORCH	120	SF
OPT. EXT. PORCH	160	SF
OPT. I CAR GARAGE	240	SF

ELEVATION "	C"	
MAIN FLOOR	804	SF
UPPER FLOOR	1170	SF
TOTAL LIVING	1974	SF
GARAGE	480	SF
FRONT PORCH	81	SF
PATIO	120	SF
TOTAL SQ. FT.	2655	SF
OPT. COV. PORCH	120	6F
OPT. EXT. PORCH	160	SF
OPT. I CAR GARAGE	240	SF







H&H HOMES KENZIE

1958








ISSUAVE OF FLANS FROM THIS DRAFTERS OFFICE SHALL NOT RELIEVE THE BULDER OF RESPONSIBILITY TO REVIEW AND VERRY ALL NOTES, DYENSIONS, AND ADHERINE TO APPLICABLE BULDN'S COORS FROM TO COPTENCE FOR NOTES, DYENSIONS, OR ADHERINE TO APPLICABLE BULDN'S COORS SHALL BE BROUGHT TO THE ATTENTION OF THE DRAFTER'S OFFICE FOR CORRECTION BEFORE COPTENCEFOR OF ANY COSSINALITION.


ANY REVISIONS OR CHAVES, NOT RELATED TO THE CORRECTION OF ERRORS THAT ARE HADE AFTER THE RIVEL. THAS BUYE BEEN COPTENED SHALL BE SUBJECT TO ADDITIONAL FIES.

FAIN TROPICATIONS ARE THOSE TO THE ERROR SHALT OTHER THAN THE DRAFTER'S OFFICE, THE DRAFTER SHALL BE SUBJECT TO ADDITIONAL FIES.

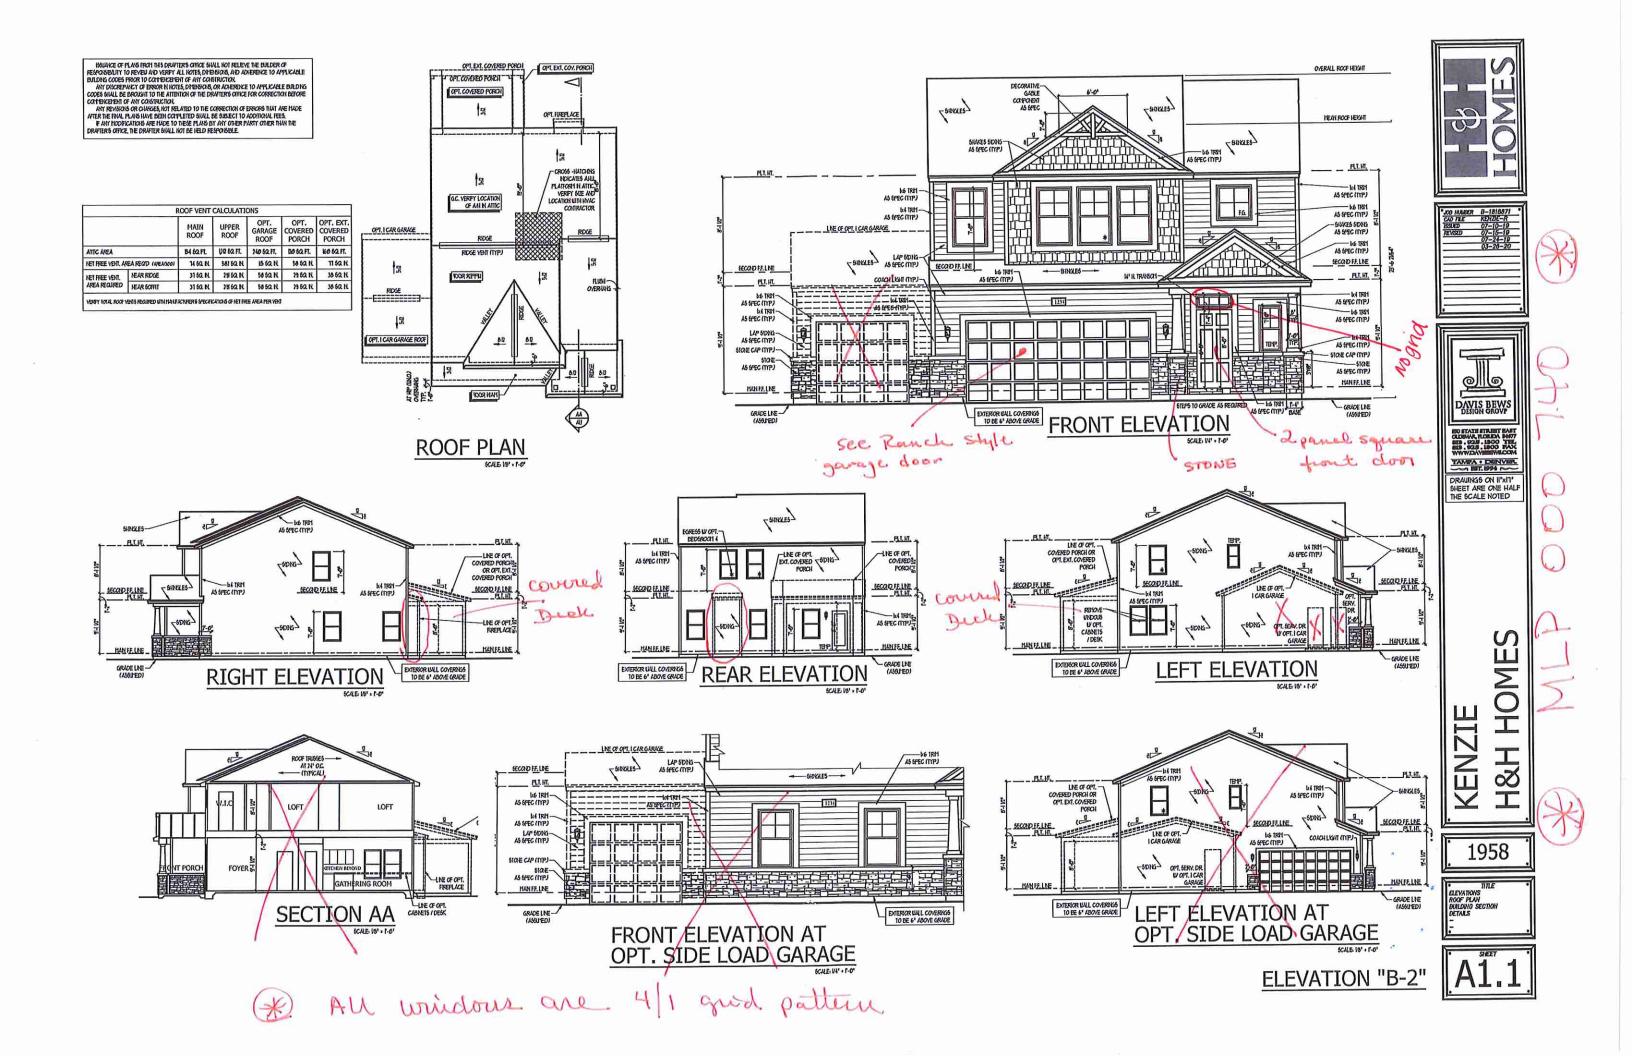

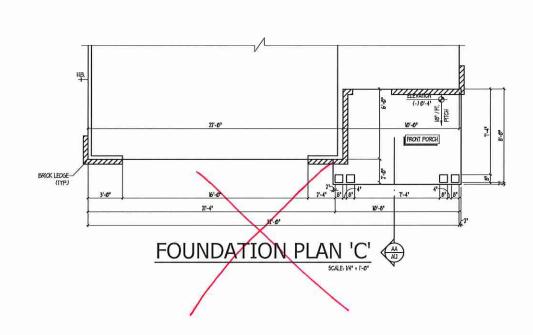

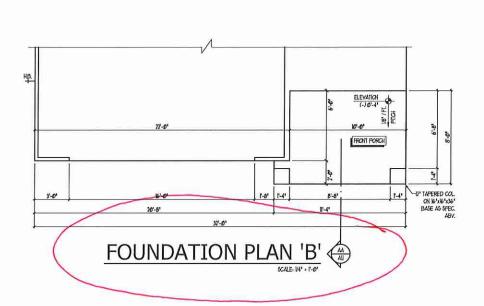

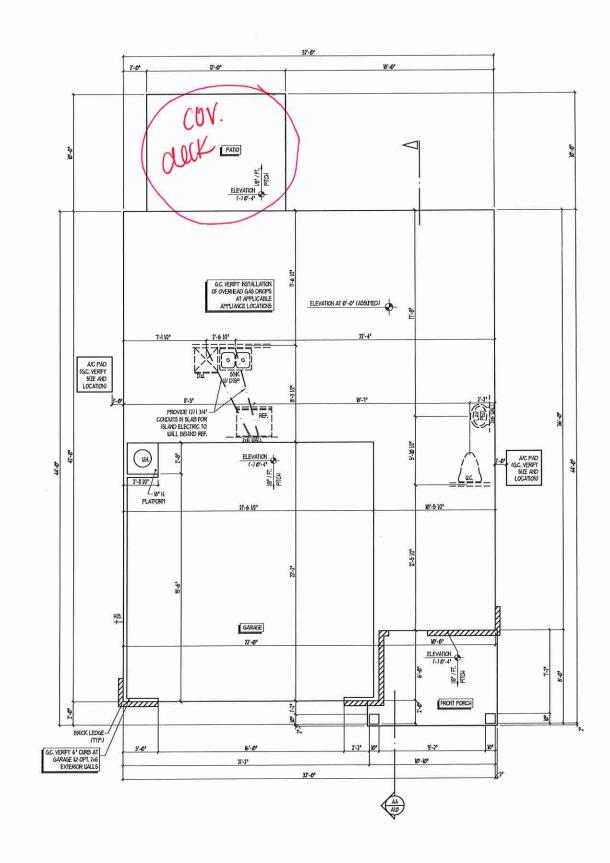










H&H HOMES KENZIE

1958


SLAB INTERFACE PLAN SCALE WITTER

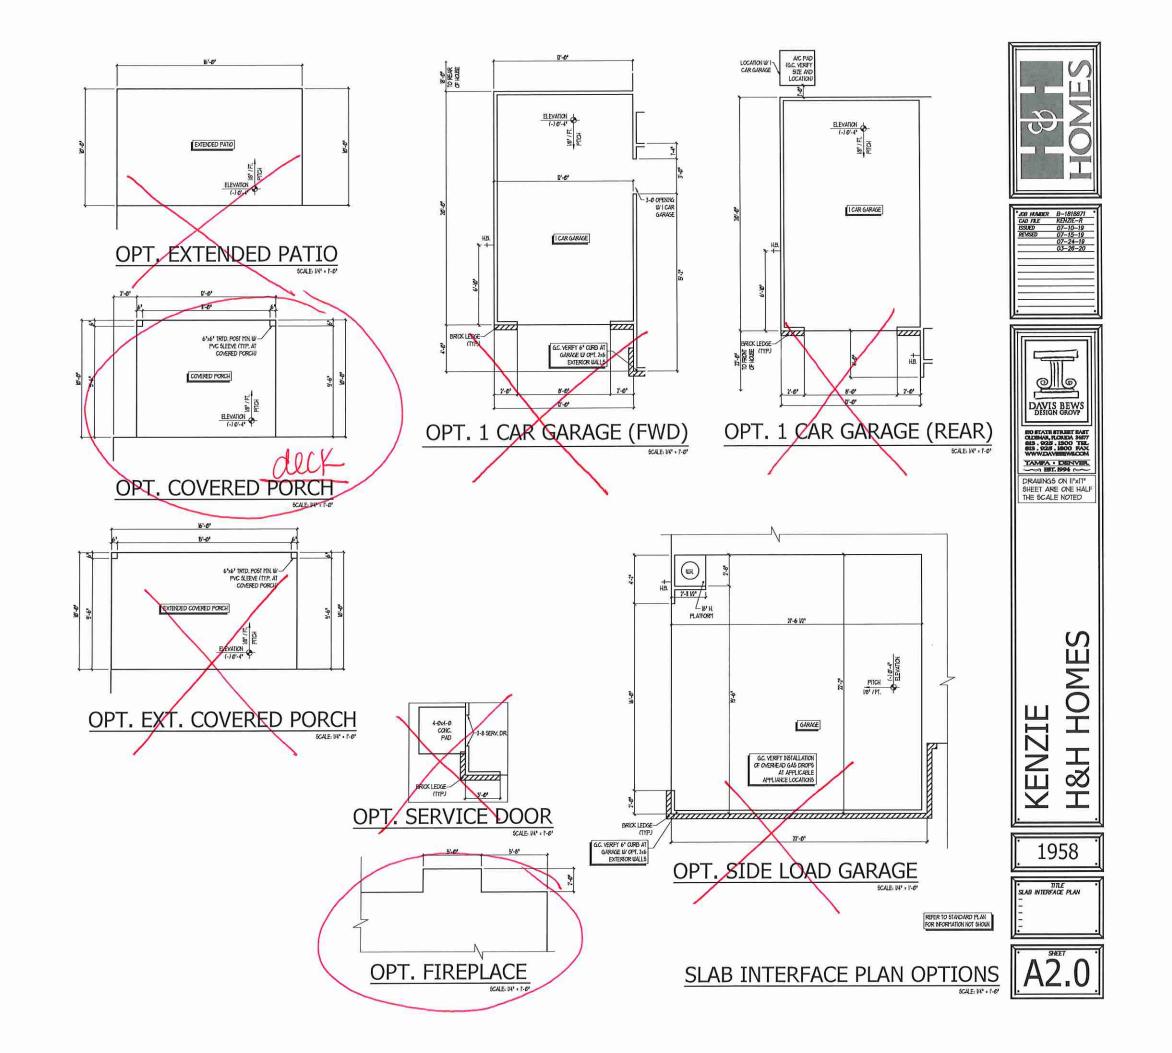

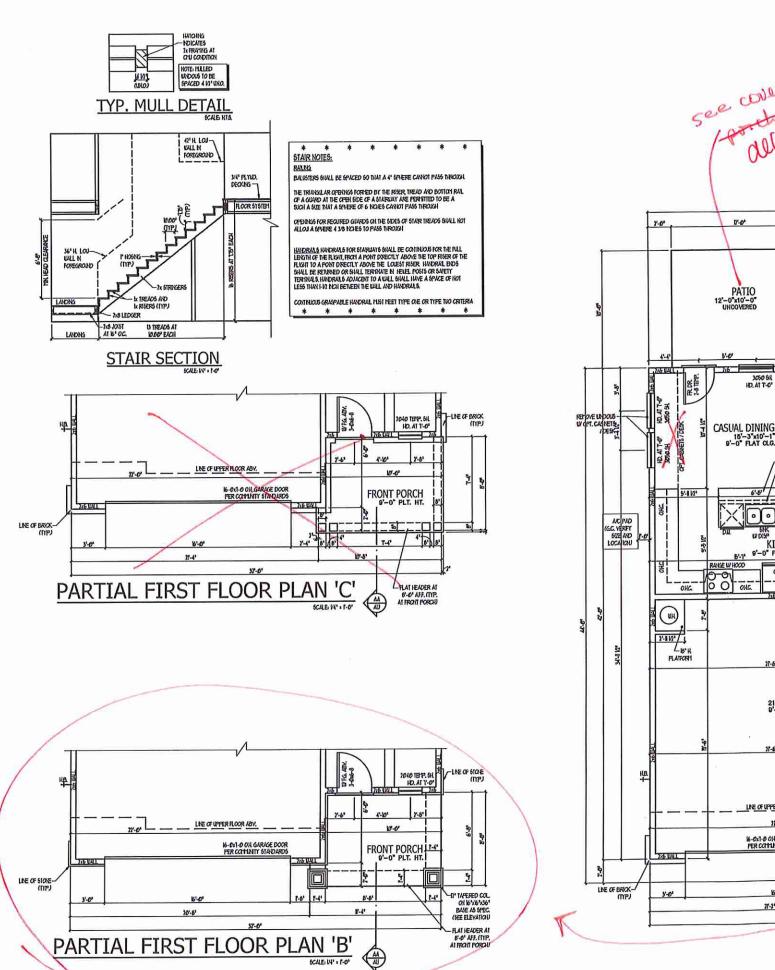

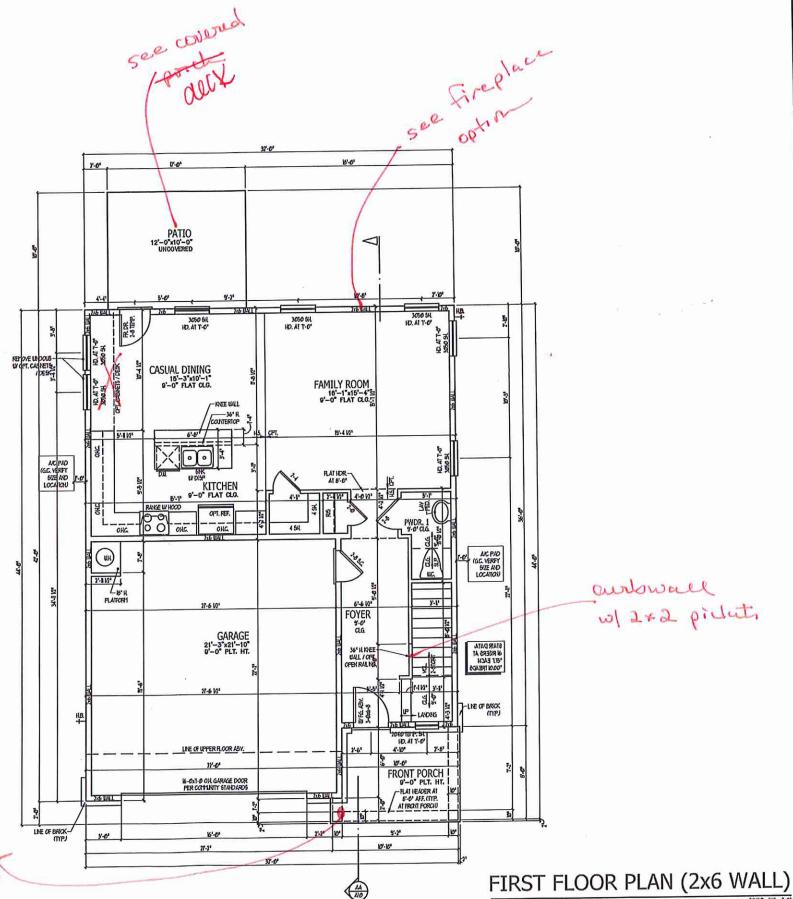









KENZIE H&H HOMES

1958



A3.0

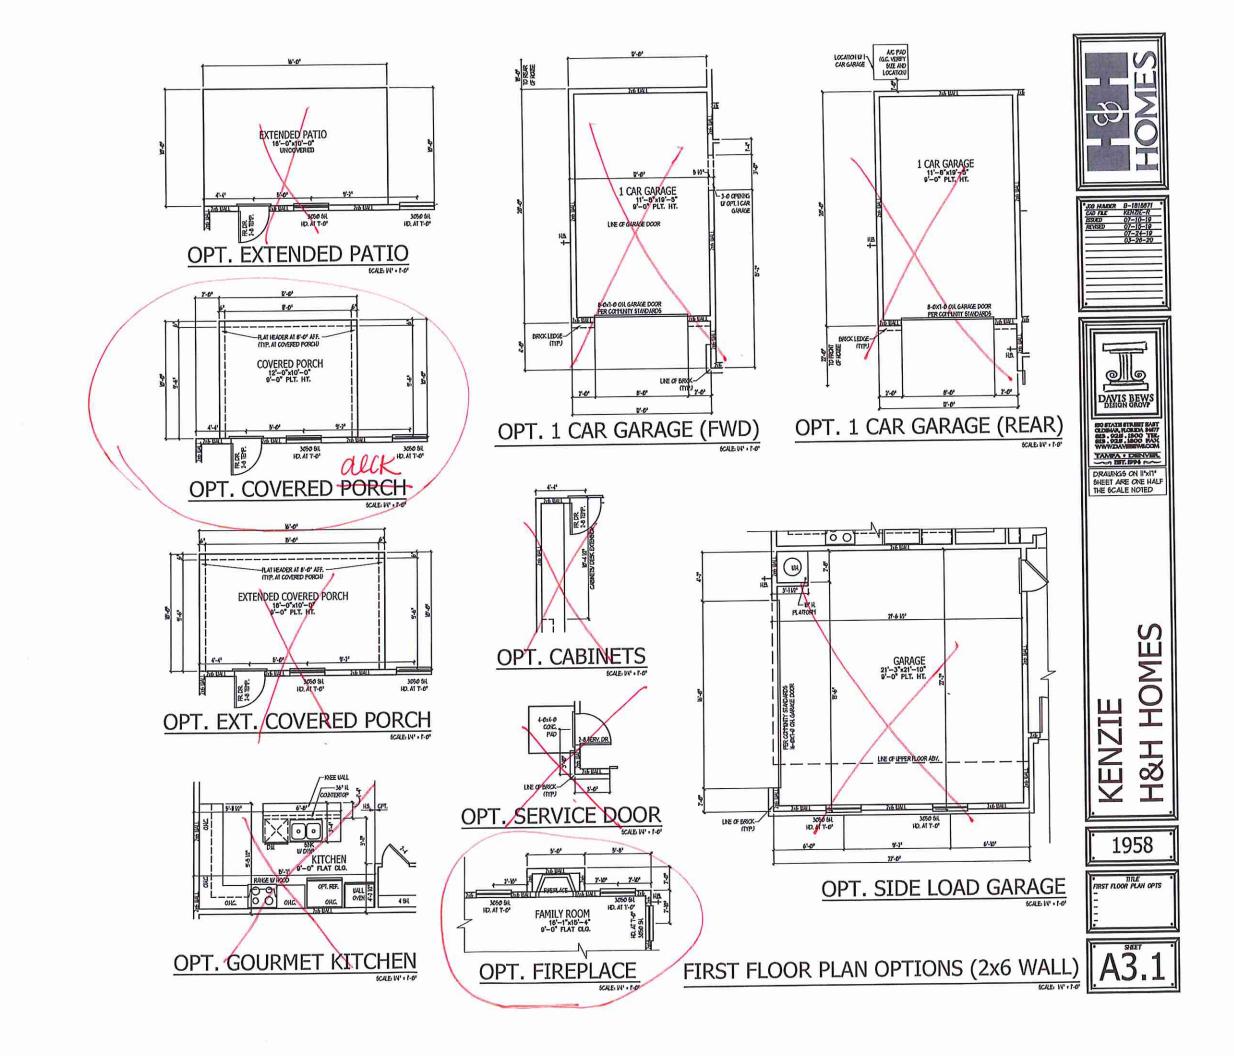

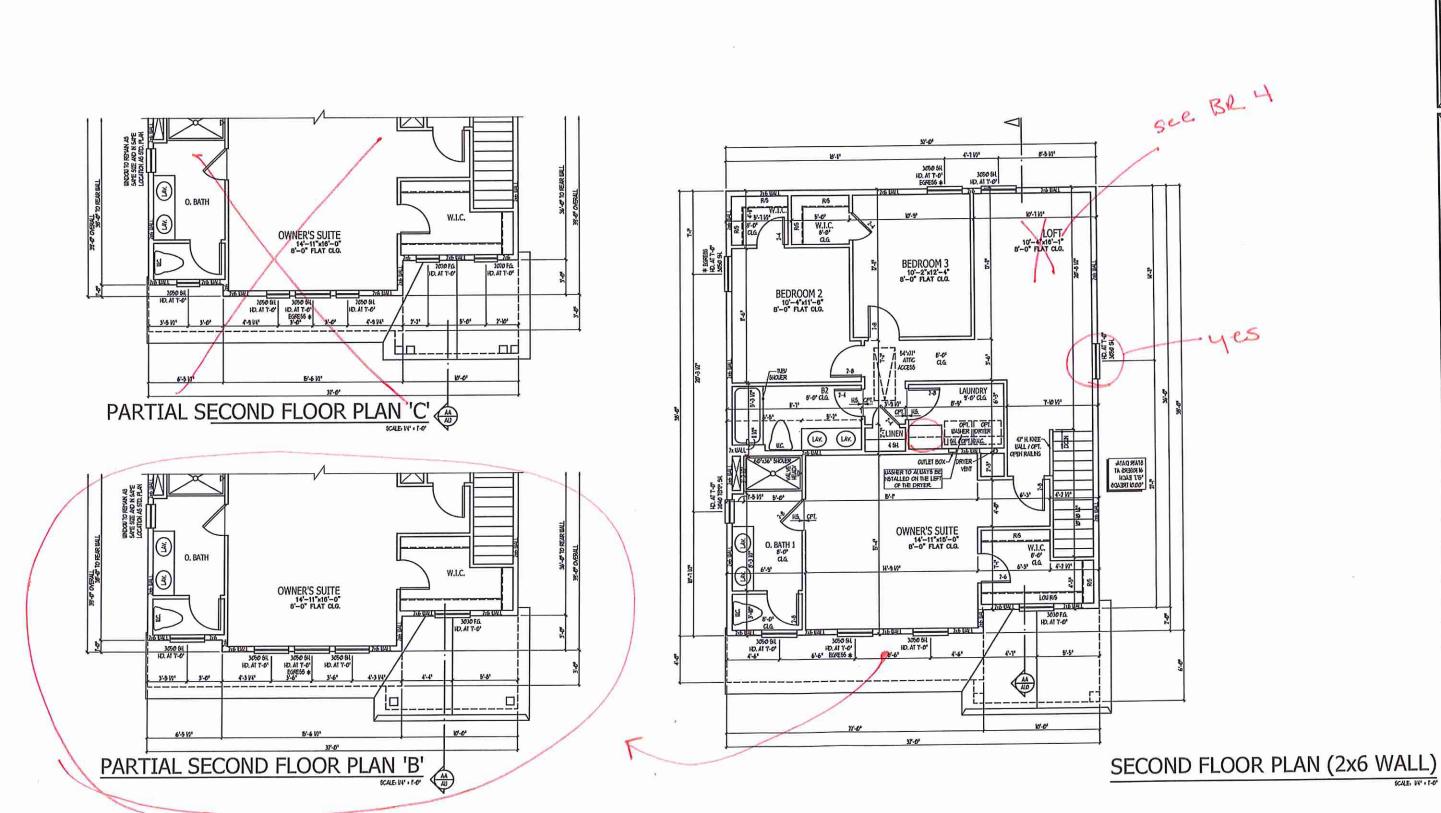







KENZIE H&H HOMES

1958




A3.2

#-1W' 8-5 W'    MO	*.co MARCH B-1818971 * *CO TIL 18708-18 *ESUB 07-18-19 *RYSSD 07-18-19 *O-3-20 *O-3-20
OPT. BEDROOM 4 I.L.O. LOFT	
102 (102) (1	DAVIS BEWS DESIGN GROVY  SO STATESTABLE BASE GUIDAGA, ROMEN SHOPE SES: 523-1800 PAX WWW.MAMMERSMEDON
OPT WALL IN BATH 2	TAMEA : DENVEL  DRAUNASS ON II'x11' SHEET ARE ONE HALF THE SCALE NOTED
CPT HE COTING THE CONTER DO CONTER D	
OPT. LAUNDRY TUB	Si
	KENZIE H&H HOMES
	1958

SECOND FLOOR PLAN OPTIONS (2x6 WALL)

A3.3

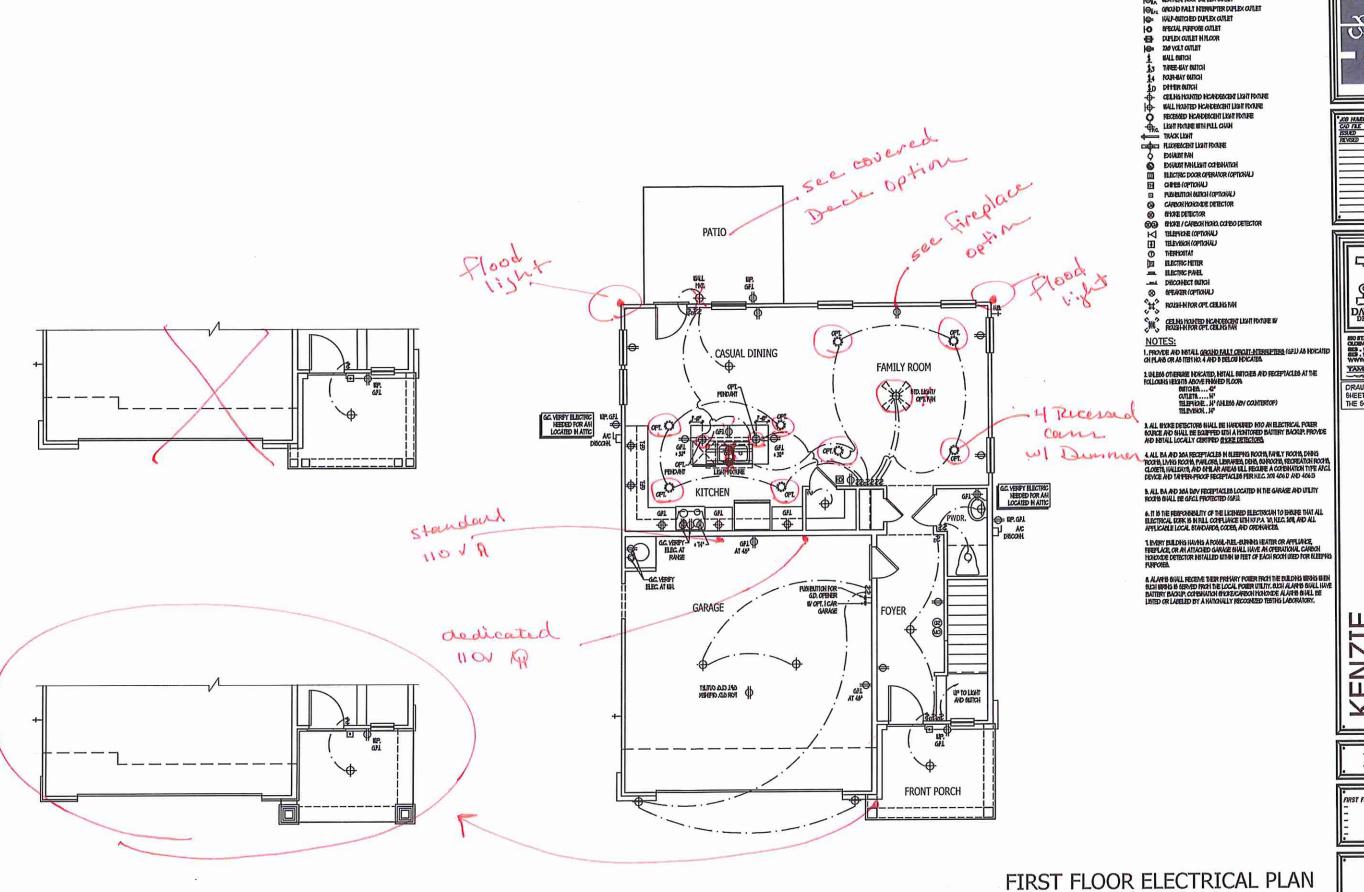

HOMES

ELECTRICAL KEY

| G: DUTEX CONTINUENCE OF ILET

| G: DUTEX CON







KENZIE H&H HOMES

1958



E1

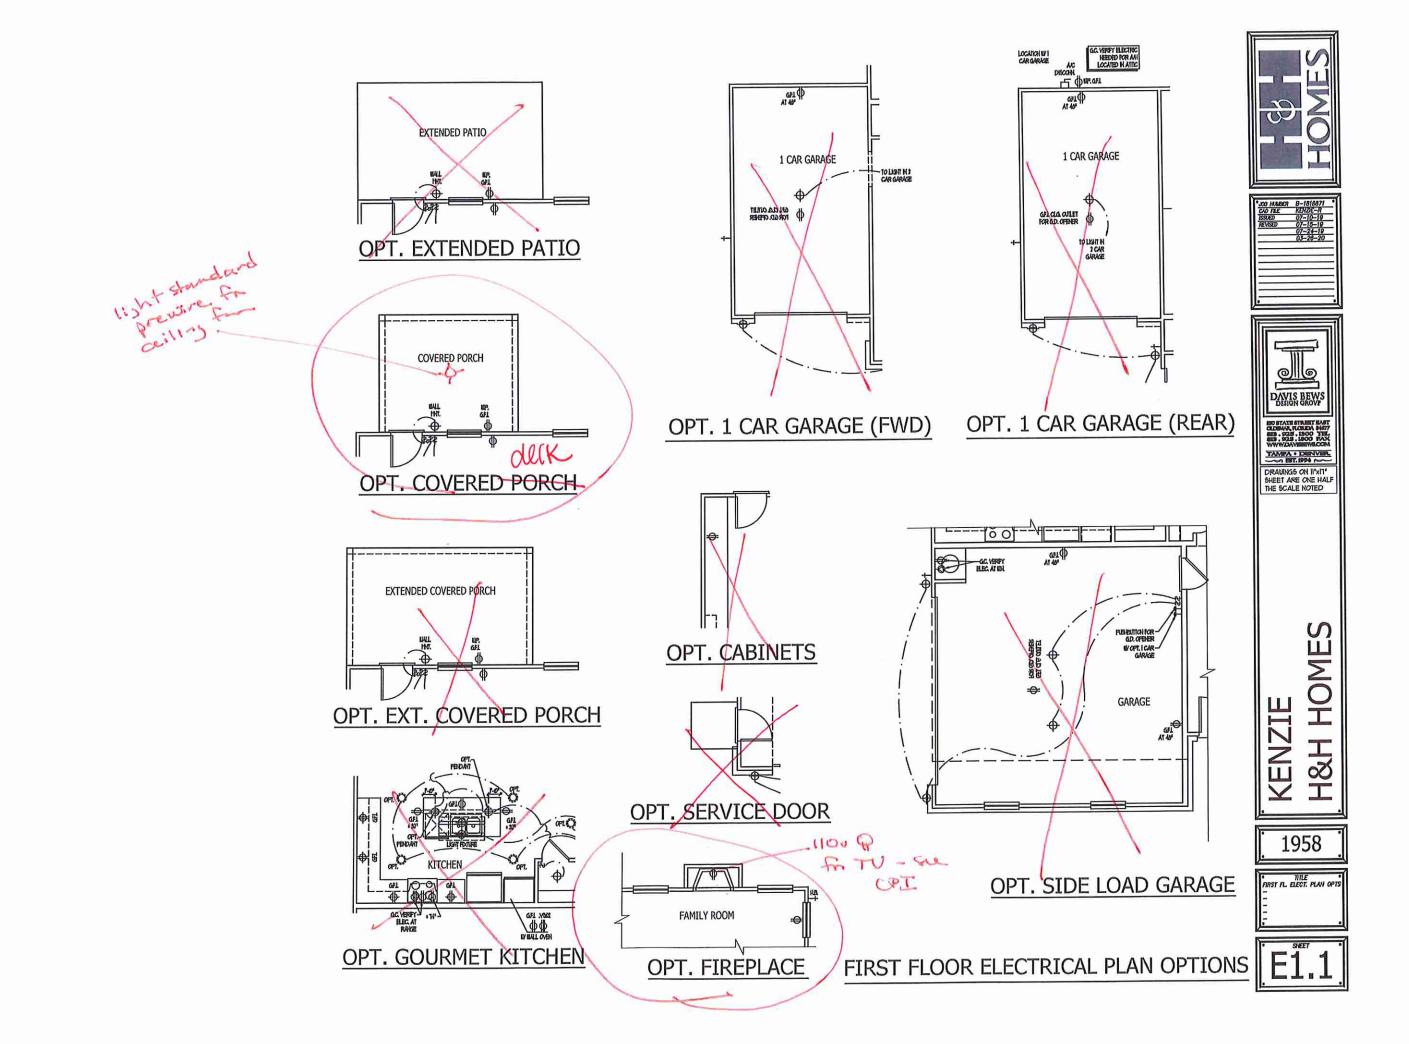

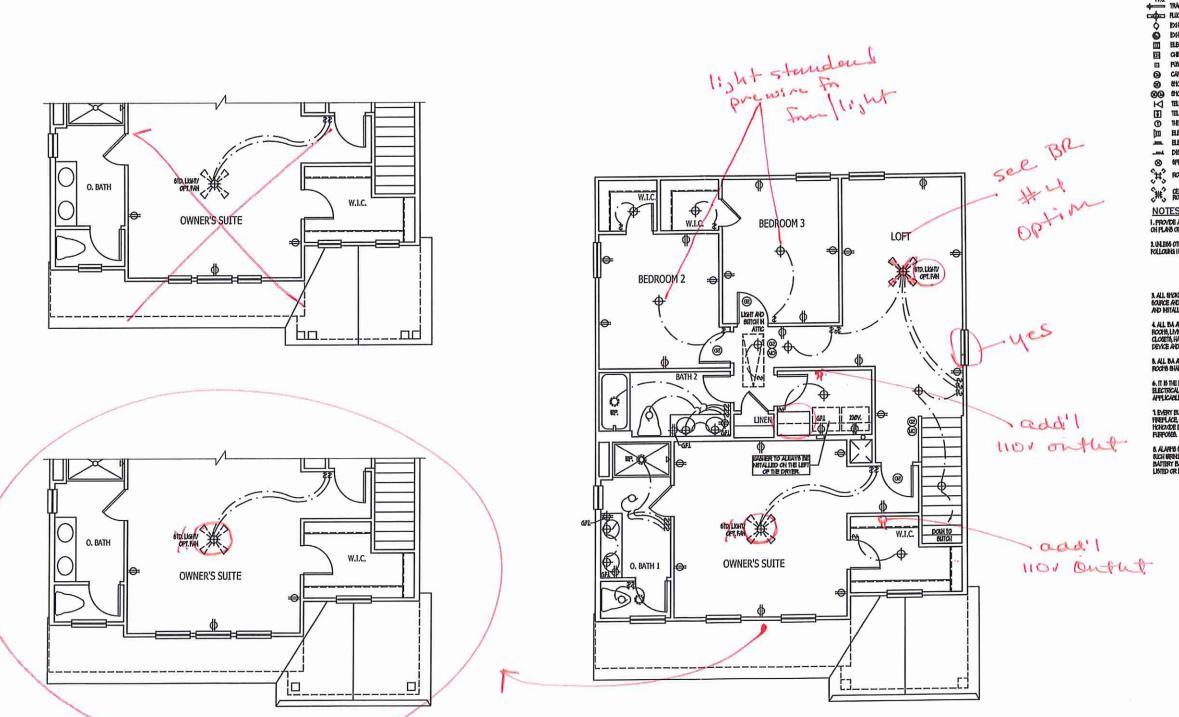

ELECTRICAL KEY

HO DIFLEX COMMENCE OFFIET

THE DREX CALE ABOVE CONTE

HOL MEANERFROOT DIFLEX OUTLET

GOAD HULL HERRETER DELEX ONLET

WE-WIF ON DEPLEY ONLET

O OFECUL PROPOSE CUILET E DELEXAMET NELOOR

200 YOLT OMLET \$3 THEE-BAY OUTCH

\$4 FOUR-BUT BUTTON D DHEROUNCH

CELLNA HOLNTED INCANDESCENT LIGHT FORTING WILL HOLITED INCANDENCENT LIGHT FORME

HIDSECTION TO BUSINE

HITCH LEVINE BUILDING TOWN

ESTERATOR OF STANDESCRIPT TOWN TOWN

FOR LEVINE BUILDING TOWN

FOR LEVIN

PARTEURISCE

EXHAUST FAVLISHT COMENATION ELECTRIC DOOR OFERVIOR (OPTICIALL)

CHEES (OPTIONAL) PUBLISHING (OPTIONAL)

CARBON HONOXOR DETECTOR

SHOKE DETECTOR @@ BYCKE / CARBON HOND, CONBO DETECTOR

M IEEHDE (OPTOWU

TELEVISION COPTIONALL) THERETOSTAT

BLECTRIC HETER ELECTRIC PARL

\_\_\_ DISCONECT BUTCH GEAVER (OPTIONAL)

ROUGH-IN FOR OPT, CEILING FAN

CELLIS HONTED INCANDERCENT LIGHT FRAUE IN ROLLISH FOR OPT. CELLIS FOR

NOTES:

N. ALL MYCKE DETECTORS HALL BE IMPOURED HTO AN ELECTRICAL POLER COJCCE ATD SHALL BE BOURFED UTH A HONTORED BATTERY BACKLY. FROMDE AND HISTALL LOCALLY CERTIFED BYCKE DETECTORS.

A ALL BA AD 26A RECEPIACIES IN BLEPPIS ROCKS, FAILT ROCKS, DANG ROCKS, LIMES ROCKS, PALLORA LERVINES, DES BUROCKS, RETREATAN ROCKS, CLOSEIS, HULLINIS, AND SHLERA RESS BLE RECLIFE A CAPENATION THE AFAI DEVICE AND TAPEN-PROCE RECEPIACIES FER RECL 2014 ASD TAN 1486.


B. ALL BA AND 26A BOY FEGET ACLES LOCATED IN THE GARAGE AND UTILITY FROM SHALL FEE GECL PROTECTED (GFL).

6. IT IS THE RESPONSIBILITY OF THE LICENSED ELECTRICAN TO ENSURE THAT ALL ELECTRICAL TORK IS NIVILL CONFLIRICE WITH FUPA 16, NEC. 1811, AND ALL APPLICABLE LOCAL STANDARDS, CODES, AND ORDMANDES.

1. EVERT BULDH'S HAVNS A ROSSE, REE, BURNN'S HEATER OR AFFLIAKE, FREFLACE, OR AN ATTACHEN GARACE HIALL HAVE AN OFFENTIONAL CARRICH HORZOSE DETECTOR INSTALLED LITHEN WITHER OF EACH ROCH LIEED FOR KLEEP

A MAYE SWILL RECENT DER FRYWKY FORER FICH THE BULDN'S WINNS WEN BUCH WINNS IN ERRYD FICHT DE LOCAL FORER VILLTY, BUCH AMAYE BUYLL HAVE BUTTERY BUCHP, COTSEMUNG MYSKECKERSK HAVOOR MAYER BUYLL DE LISTED OR LAFELD DY ANNIONALLY RECORNED TESTINS LAFORATORY.








HOME KENZ H&H

1958



SECOND FLOOR ELECTRICAL PLAN

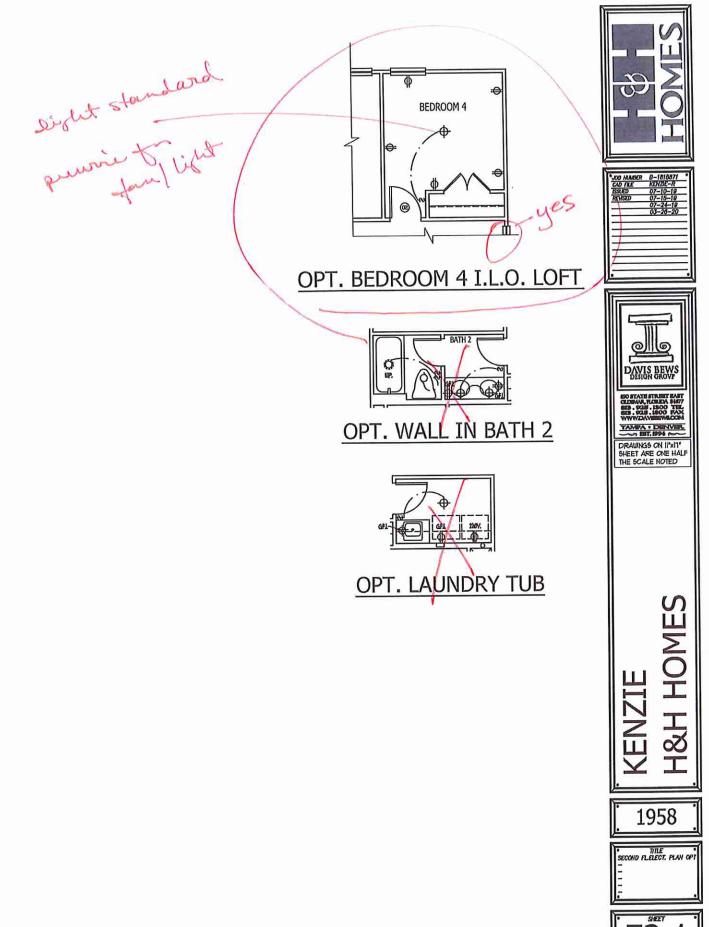

SECOND FLOOR ELECTRICAL PLAN OPTIONS



1900 AM DRIVE, SUITE 201, QUAKERTOWN, PA 18951 (215) 804-4449 www.kse-eng.com

# **KENZIE**

# NORTH CAROLINA

THESE DRAWINGS ARE TO BE USED IN CONJUNCTION WITH AND COORDINATED WITH THE ARCHITECTURAL, CIVIL, MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS, THIS COORDINATION IS NOT THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER OF RECORD (SER). SHOULD ANY DISCREPANCIES BECOME APPARENT, THE CONTRACTOR SHALL NOTIFY KSE ENGINEERING, P.C. BEFORE CONSTRUCTION BEGINS. IT IS THE INTENT OF THE ENGINEER LISTED ON THESE DOCUMENTS THAT THESE DOCUMENTS BE ACCURATE, PROVIDING LICENSED PROFESSIONALS CLEAR INFORMATION. EVERY ATTEMPT HAS BEEN MADE TO PREVENT ERROR. THE BUILDER AND ALL SUBCONTRACTORS ARE REQUIRED TO REVIEW ALL OF THE INFORMATION CONTAINED IN THESE DOCUMENTS PRIOR TO THE COMMENCEMENT OF ANY WORK. THE ENGINEER IS NOT RESPONSIBLE FOR ANY PLAN ERRORS, OMISSIONS, OR MISINTERPRETATIONS UNDETECTED AND NOT REPORTED TO THE ENGINEER PRIOR TO CONSTRUCTION. ALL CONSTRUCTION MUST BE IN ACCORDANCE TO THE INFORMATION FOUND IN THESE DOCUMENTS.

# DESIGN SPECIFICATIONS:

DESIGN BUILDING CODE (REFERRED TO HEREIN AS 'THE BUILDING CODE'):

• 2018 NORTH CAROLINA RESIDENTIAL CODE, WALL BRACING PER INTERNATIONAL RESIDENTIAL

### DESIGN LIVE LOADS:

- ROOF = 20 PSF (LOAD DURATION FACTOR=1.25)
- · UNINHABITABLE ATTICS WITH LIMITED STORAGE = 20 PSF (WHERE SPECIFIED ON PLANS)
- · HABITABLE ATTICS AND ATTICS SERVED WITH FIXED STAIRS = 30 PSF
- FLOOR (SLEEPING AREAS) = 30 PSF
- DECK = 40 PSF • BALCONY = 40 PSF
- · STAIRS = 40 PSF

- ROOF TRUSS = 17 PSF (TC=7, BC=10)
- FLOOR TRUSS = 15 PSF (TC=10, BC=5) • FLOOR JOIST = 10 PSF
- · QUEEN ANNE BRICK = 25 PSF

\*NOTE: STRUCTURAL FRAMING HAS NOT BEEN DESIGNED FOR TILE, GRANITE, MARBLE OR OTHER MATERIALS HEAVIER THAN THE ABOVE LOADING UNLESS SPECIFICALLY NOTED ON PLANS.\*.

- ULTIMATE WIND SPEED = Up to 130 MPH
- EXPOSURE CATEGORY = B

ASSUMED SOIL BEARING CAPACITY = 2000 PSF

ASSUMED LATERAL SOIL PRESSURE = 45 PCF

FROST DEPTH = 12"

SEISMIC DESIGN CATEGORY = B

ENGINEERED LUMBER SHALL HAVE THE FOLLOWING MINIMUM DESIGN VALUES:
• TJI 210 SERIES (SERIES AND SPACING PER PLANS)

- LSL: E=1,550,000 PSI, F<sub>8</sub>=2,325 PSI, F<sub>V</sub>=310 PSI, F<sub>6</sub>=900 PSI LVL: E=2,000,000 PSI, F<sub>8</sub>=2,600 PSI, F<sub>V</sub>=285 PSI, F<sub>6</sub>=750 PSI
- PSL: E=2,100,000 PSI, FB=2,900 PSI, Fv=290 PSI, Fc=625 PSI

THIS PLAN HAS BEEN DESIGNED PER THE 2018 EDITION OF THE NC RESIDENTIAL CODE. WHERE FRAMING, FOUNDATION, OR OTHER STRUCTURAL ITEMS DO NOT COMPLY WITH THE PRESCRIPTIVE METHODS OF THE CODE, THOSE ITEMS HAVE BEEN DESIGNED IN ACCORDANCE WITH ACCEPTED ENGINEERING PRACTICE PER NCRC R301.1.3.





130 M. Model Kenzie to Up

Sheet

Cover

Project #: 105-19004 Designed By: KRK

Checked By: Issue Date: 8/29/19 Re-Issue: 4/30/20 Scale: 1/8"=1'-0" @ 11x17

1/4"=1'-0" @ 22x34

### GENERAL STRUCTURAL NOTES:

THE DESIGN PROFESSIONAL WHOSE SEAL APPEARS ON THESE DRAWINGS IS THE STRUCTURAL ENGINEER OF RECORD (SER) FOR THIS PROJECT. THE SER BEARS THE RESPONSIBILITY OF THE PRIMARY STRUCTURAL ELEMENTS AND THE PERFORMANCE OF THIS STRUCTURE NO OTHER PARTY MAY REVISE ALTER OR DELETE ANY STRUCTURAL ASPECTS OF THESE CONSTRUCTION DOCUMENTS WITHOUT WRITTEN CONSENT OF KSE ENGINEERING, P.C. OR THE SER, FOR THE PURPOSES OF THESE CONSTRUCTION DOCUMENTS. THE SER AND KSE ENGINEERING SHALL BE CONSIDERED THE SAME ENTITY.

THE STRUCTURE IS ONLY STABLE IN ITS COMPLETED FORM. THE CONTRACTOR SHALL PROVIDE ALL REQUIRED TEMPORARY BRACING DURING CONSTRUCTION TO STABILIZE THE STRUCTURE

THE SER IS NOT RESPONSIBLE FOR CONSTRUCTION SEQUENCES, METHODS, OR TECHNIQUES IN CONNECTION WITH THE CONSTRUCTION OF THIS STRUCTURE. THE SER WILL NOT BE HELD RESPONSIBLE FOR THE CONTRACTOR'S FAILURE TO CONFORM TO THE CONTRACT DOCUMENTS, SHOULD ANY NON-CONFORMITIES OCCUR

THE SER DOES NOT CERTIFY DIMENSIONAL ACCURACY OR ARCHITECTURAL LAYOUT INCLUDING ROOF GEOMETRY. THE SER ASSUMES NO LIABILITY FOR CHANGES MADE TO THESE PLANS BY OTHERS, OR FOR CONSTRUCTION METHODS, OR FOR ANY DEVIATION FROM THE PLANS. THE SER SHALL BE NOTIFIED PRIOR TO CONSTRUCTION IF ANY DISCREPANCIES ARE NOTED ON THE PLANS.

- ANY STRUCTURAL ELEMENTS OR DETAILS NOT FULLY DEVELOPED ON THE CONSTRUCTION DRAWINGS SHALL BE COMPLETED UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER. THESE SHOP DRAWINGS SHALL BE SUBMITTED TO KSE ENGINEERING FOR REVIEW BEFORE ANY CONSTRUCTION BEGINS. THE SHOP DRAWINGS WILL BE REVIEWED FOR OVERALL COMPLIANCE AS IT RELATES TO THE STRUCTURAL DESIGN OF THIS PROJECT. VERIFICATION OF THE SHOP DRAWINGS FOR DIMENSIONS, OR FOR ACTUAL FIELD CONDITIONS, IS NOT THE RESPONSIBILITY OF THE SER OR KSE ENGINEERING, P.C. VERIFICATION OF ASSUMED FIELD CONDITIONS IS NOT THE
- RESPONSIBILITY OF THE SER. THE CONTRACTOR SHALL VERIFY THE FIELD CONDITIONS FOR ACCURACY AND REPORT ANY DISCREPANCIES TO KSE ENGINEERING, P.C. BEFORE CONSTRUCTION BEGINS. THE SER IS NOT RESPONSIBLE FOR ANY SECONDARY STRUCTURAL
- ELEMENTS OR NON-STRUCTURAL ELEMENTS, EXCEPT FOR THE ELEMENTS SPECIFICALLY NOTED ON THE STRUCTURAL DRAWINGS. THIS STRUCTURE AND ALL CONSTRUCTION SHALL CONFORM TO ALL
- APPLICABLE SECTIONS OF THE BUILDING CODE AND ANY LOCAL
- DO NOT SCALE DRAWINGS, WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DIMENSIONS. ALL DIMENSIONS ARE TO FACE OF STUD OR TO FACE OF FRAMING UNLESS OTHERWISE NOTED.
- 10. PROVIDE MOISTURE PROTECTION AND FLASHING PER ARCHITECTURAL DETAILS.

# **FOUNDATIONS:**

- FOUNDATIONS SHALL BE CONSTRUCTED IN ACCORDANCE WITH CHAPTER 4 OF THE BUILDING CODE.
- CONTRACTOR IS SOLELY RESPONSIBLE FOR VERIFYING THE SUITABILITY OF THE SITE SOIL CONDITIONS AT THE TIME OF CONSTRUCTION, THE BUILDER SHALL FURNISH ANY AND ALL REPORTS RECEIVED FROM THE GEOTECHNICAL ENGINEER ON THE STUDY OF THE PROPOSED SITE TO THE DESIGNER, STRUCTURAL ENGINEER, AND GENERAL CONTRACTOR
- MAXIMUM DEPTH OF UNBALANCED FILL AGAINST MASONRY WALLS TO RE AS SPECIFIED IN THE BUILDING CODE
- THE SER HAS NOT PERFORMED A SUBSURFACE INVESTIGATION. VERIFICATION OF THE ASSUMED VALUE IS THE RESPONSIBILITY OF THE OWNER OR THE CONTRACTOR. SHOULD ANY ADVERSE SOIL CONDITION BE ENCOUNTERED, THE SER MUST BE CONTACTED BEFORE PROCEEDING.
- THE BOTTOM OF ALL FOOTINGS SHALL EXTEND BELOW THE FROST LINE FOR THE REGION IN WHICH THE STRUCTURE IS TO BE CONSTRUCTED, BUT NOT LESS THAN A MINIMUM OF 12" BELOW GRADE, ALL FOOTINGS TO HAVE A MINIMUM PROJECTION OF 2" ON EACH SIDE OF FOUNDATION WALLS. MAXIMUM FOOTING PROJECTION SHALL NOT EXCEED THE THICKNESS OF THE FOOTING.
- WOOD SILL PLATES SHALL BE ANCHORED TO THE FOUNDATION WITH 1/2" ANCHOR BOLTS WITH MINIMUM 7" EMBEDMENT, SPACED A MAXIMUM OF 6'-0" O.C. INSTALL MINIMUM 2 ANCHOR BOLTS PER SECTION, 12" MAXIMUM FROM CORNERS, &" DIAMETER x R" LONG SIMPSON TITEN HD 1. OR USP SCREW-BOLT+ SCREWS MAY BE SUBSTITUTED ON A 1 FOR 1
- ANY FILL SHALL BE PLACED UNDER THE DIRECTION OR RECOMMENDATION OF A LICENSED PROFESSIONAL ENGINEER. THE RESULTING SOIL SHALL BE COMPACTED TO A MINIMUM OF 95%
- EXCAVATIONS OF FOOTINGS SHALL BE LINED TEMPORARILY WITH A 6 MIL POLYETHYLENE MEMBRANE IF PLACEMENT OF CONCRETE DOES NOT OCCUR WITHIN 24 HOURS OF EXCAVATION.
- NO CONCRETE SHALL BE PLACED AGAINST ANY SUBGRADE CONTAINING WATER, ICE, FROST, OR LOOSE MATERIAL
- 10. PROVIDE FOUNDATION WATERPROOFING AND DRAIN WITH POSITIVE SLOPE TO OUTLET AS REQUIRED BY SITE CONDITIONS (SEE ARCHITECTURAL PLANS AND DETAILS)
- 11. NONE OF THE FOUNDATION DESIGNS IN THESE DOCUMENTS ARE SUITABLE FOR INSTALLATION IN SHRINK/SWELL CONDITIONS. REFER TO GEOTECHNICAL ENGINEER FOR APPROPRIATE DESIGN.
- 12. LOTS SHALL BE GRADED TO DRAIN SURFACE WATER AWAY FROM FOUNDATION WALLS. THE GRADE SHALL FALL A MINIMUM OF 6 INCHES WITHIN THE FIRST TEN FEET
- 13. CRAWL SPACE TO BE GRADED LEVEL AND CLEAR OF ALL DEBRIS. PROVIDE MINIMUM 6 MIL APPROVED VAPOR BARRIER. ALL JOINTS TO BE LAPPED MINIMUM 12" AND SEALED.

### CONCRETE & REINFORCING

- CONCRETE DESIGN BASED ON ACI 318 AND ACI 318.1 OR ACI 332. CONCRETE SHALL HAVE A NORMAL WEIGHT AGGREGATE AND A MINIMUM COMPRESSIVE STRENGTH (f'c) = 3.000 PSI MINIMUM AT 28 DAYS PER CODE (VARIES W/ WEATHER), UNLESS OTHERWISE NOTED ON THE PLAN.
- CONCRETE SHALL BE PROPORTIONED, MIXED, AND PLACED IN ACCORDANCE WITH THE LATEST EDITIONS OF ACI 318: "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" AND ACI 301: "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS".
- AIR ENTRAINED CONCRETE MUST BE USED FOR ALL STRUCTUR ELEMENTS EXPOSED TO FREEZE/THAW CYCLES AND DEICING CHEMICALS. AIR ENTRAINMENT AMOUNTS (IN PERCENT) SHALL BE WITHIN -1% TO +2% OF 5% FOR FOOTINGS AND EXTERIOR SLABS.
- NO ADMIXTURES SHALL BE ADDED TO ANY STRUCTURAL CONCRETE WITHOUT WRITTEN PERMISSION OF THE SER, WATER ADDED TO CONCRETE ON SITE SHALL NOT EXCEED THAT ALLOWED BY THE MIX DESIGN.
- CONCRETE SLABS-ON-GRADE SHALL BE CONSTRUCTED IN ACCORDANCE WITH ACI 302.1R: "GUIDE FOR CONCRETE SLAB AND SLAB CONSTRUCTION".
- CONTROL OR SAW CUT JOINTS (CUT OR TOOLED) SHALL BE SPACED IN INTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 15'-0" O.C. AND IN EXTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 10'-0" UNLESS OTHERWISE NOTED, CARE SHALL BE TAKEN TO AVOID RE-ENTRAN' CORNERS
- CONTROL OR SAW CUT JOINTS SHALL BE PRODUCED USING CONVENTIONAL CUT OR TOOLED PROCESSES WITHIN 4 TO 12 HOURS AFTER THE SLAB HAS BEEN FINISHED.
- ALL WELDED WIRE FABRIC (W.W.F.) FOR CONCRETE SLABS-ON-GRADE SHALL BE PLACED AT MID-DEPTH OF SLAB, THE W.W.F. SHALL BE SECURELY SUPPORTED DURING THE CONCRETE POUR, FIBROUS REINFORCEMENT, OR POLYPROPYLENE FIBERS MAY BE USED IN LIFU OF W.W.F. APPLICATION OF POLYPROPYLENE FIBERS PER CUBIC YARD OF CONCRETE SHALL BE PER MANUFACTURER AND COMPLY WITH ASTM C1116, ANY LOCAL BUILDING CODE REQUIREMENTS AND SHALL MEET OR EXCEED CURRENT INDUSTRY STANDARD.
- POLYPROPYLENE REINFORCING TO BE 100% VIRGIN, CONTAINING NO REPROCESSED OLEFIN MATERIALS AND SPECIFICALLY MANUFACTURED FOR USE AS CONCRETE SECONDARY REINFORCEMENT.
- 10. STEEL REINFORCING BARS SHALL BE NEW BILLET STEEL CONFORMING TO ASTM A615, GRADE 60.
- DETAILING, FABRICATION, AND PLACEMENT OF REINFORCING STEEL SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF ACI 315: "MANUAL OF STANDARD PRACTICE FOR DETAILING CONCRETE STRUCTURES".
- 12. HORIZONTAL FOOTING AND WALL REINFORCEMENT SHALL BE CONTINUOUS AND SHALL HAVE 90' BENDS, OR CORNER BARS WITH
- THE SAME SIZE/SPACING AS THE HORIZONTAL REINFORCEMENT. 13. PROVIDE REINFORCEMENT LAP AS NOTED BELOW, UNLESS NOTED OTHERWISE:
  - #4 BARS 30" LENGTH #5 BARS - 38" LENGTH
- #6 BARS 45" LENGTH WHERE REINFORCING DOWELS ARE REQUIRED. THEY SHALL BE EQUIVALENT IN SIZE AND SPACING TO THE VERTICAL REINFORCEMENT. THE DOWEL SHALL EXTEND 48 BAR DIAMETERS VERTICALLY AND 20 BAR DIAMETERS INTO THE FOOTING. SEE KSE FOUNDATION DETAILS.
- WHERE FOOTING BOTTOMS ARE TO BE STEPPED AT SLOPING GRADE CONDITIONS, PROVIDE CONTINUOUS REINFORCING WITH Z BARS (TO MATCH FOOTING REINFORCING) AS REQUIRED.
- BAR SUPPORT ACCESSORIES SHALL BE PROVIDED IN ACCORDANCE WITH THE LATEST ACL MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCED CONCRETE STRUCTURES, EXCEPT THAT REINFORCING SHALL BE CHAIRED ON THE BOTTOM AND/OR THE SIDES ON BOLSTERS SPACED NOT MORE THAN 4 FEET ON CENTER. NO ROCKS, CMU, CLAY TILE, OR BRICK SHALL BE USED TO SUPPORT REINFORCING.
- FOR GRADE SUPPORTED SLABS, SLAB REINFORCING SHALL BE HELD IN PLACE BY BAR SUPPORTS AND ACCESSORIES AS DESCRIBED IN THE CRSI MANUAL OF STANDARD PRACTICE, BAR SUPPORTS SHALL BE SPACED A MAXIMUM OF 4'-0" O.C. BOTH WAYS IN STRAIGHT LINES ON THE MESH GRID.

## MASONRY

- ALL MASONRY SHALL CONFORM TO ASTM C-90, Ftm=1500 PSI. ALL BRICK SHALL CONFORM TO ASTM C-216, F'm=1500 PSI, ALL MORTAR SHALL BE TYPE 'S' (TYPE 'M' BELOW GRADE) AND CONFORM TO ASTM C-270. COARSE GROUT SHALL CONFORM TO ASTM C-476 WITH A MAXIMUM AGGREGATE SIZE OF ¾" AND A MINIMUM COMPRESSIVE STRENGTH OF 2.000
- ALL MASONRY WORK SHALL BE IN ACCORDANCE WITH "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES" ACI 530/ASCE 5/TMS 402 AND "SPECIFICATIONS FOR MASONRY STRUCTURES" ACI 530.1/ ASCE 6/TMS 602.
- THE UNSUPPORTED HEIGHT OF SOLID MASONRY PIERS SHALL NOT EXCEED TEN TIMES THEIR LEAST DIMENSION, UNFILLED HOLLOW PIERS MAY BE USED IF THE UNSUPPORTED HEIGHT IS NOT MORE THAN FOUR TIMES THEIR LEAST DIMENSION.
- 4. EACH CRAWL SPACE PIER SHALL BEAR IN THE MIDDLE THIRD OF ITS RESPECTIVE FOOTING AND EACH GIRDER SHALL BEAR IN THE MIDDLE THIRD OF THE PIERS. PILASTERS TO BE BONDED TO PERIMETER
- TOP COURSE OF MASONRY SHALL BE GROUTED SOLID
- HORIZONTAL WALL JOINT REINFORCEMENT SHALL BE STANDARD 9 GAGE GALVANIZED LADDER OR TRUSS TYPE SPACED AT 16" O.C., UNLESS SHOWN OTHERWISE ON THE DRAWINGS.
- SPLICED WIRE REINFORCEMENT SHALL BE LAPPED AT LEAST 6" AND CONTAIN AT LEAST ONE CROSS WIRE OF EACH PIECE OF REINFORCEMENT WITHIN THE 6". LAP WITH STANDARD 'T' AND 'L' SHAPED PIECES AT INTERSECTIONS AND CORNERS.

### WOOD FRAMING:

- SOLID SAWN WOOD FRAMING MEMBERS SHALL CONFORM TO THE SPECIFICATIONS LISTED IN THE LATEST EDITION OF THE "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION": (NDS), UNLESS OTHERWISE NOTED, ALL WOOD FRAMING MEMBERS ARE DESIGNED TO
- SPRUCE-PINE-FIR (SPF) WITH THE FOLLOWING MINIMUM DESIGN
- E=1,400,000 PSI,  $F_b$ =875 PSI,  $F_v$ =135 PSI 1.1. FRAMING: SPF #2.
- 1.2. PLATES: SPF #2.
- 1.3. STUDS: SPF STUD GRADE.
- WALL STUD SPACING, (MAXIMUM 10' NOMINAL PLATE HEIGHT): 1 & 2 STORY EXTERIOR AND INTERIOR BEARING:
- 2x4 @ 16" O.C. OR 2x6 @ 24" O.C., U.N.O. BOTTOM OF 3 STORIES EXTERIOR AND INTERIOR BEARING: 2x6 @ 16" O.C., U.N.O.
- INTERIOR NON-BEARING: 2x @ 24" O.C., U.N.O.
- ALL LUMBER EXPOSED TO WEATHER OR IN CONTACT WITH CONCRETE SHALL BE PRESERVATIVE TREATED SOUTHERN YELLOW PINE #2 OR
- ANCHOR SILL PLATES IN ACCORDANCE W/ GENERAL STRUCTURAL NOTES. ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY, LARGER MEMBERS MAY BE SUBSTITUTED AS NEEDED FOR EASE OF CONSTRUCTION.
- NAILS SHALL BE COMMON WIRE NAILS UNLESS OTHERWISE NOTED BOLT HOLES AND LEAD HOLES FOR LAG SCREWS SHALL BE IN ACCORDANCE WITH NDS SPECIFICATIONS.
- INDIVIDUAL STUDS FORMING A COLUMN SHALL BE ATTACHED WITH (2) ROWS 10d NAILS @ 6" O.C. STAGGERED, THE STUD COLUMN SHALL BE FULLY BLOCKED AT ALL FLOOR LEVELS TO ENSURE PROPER LOAD TRANSFER, WALL SHEATHING SHALL BE NAILED TO EDGE OF EACH STUD
- FACE NAIL ALL MULTI-PLY BEAMS AND HEADERS WITH (2) ROWS 16d COMMON NAILS @ 16" O.C., STAGGERED, OR PER MANUFACTURER'S SPECIFICATIONS FOR ENGINEERED LUMBER, APPLY NAILING FROM BOTH FACES FOR (3) OR MORE PLIES.
- 10. FASTEN 4-PLY BEAMS WITH (1) ½" DIAMETER THROUGH BOLT W/ NUTS AND WASHERS AT 12" O.C. STAGGERED TOP AND BOTTOM, 15" MINIMUM FDGE DISTANCE, (UNLESS OTHERWISE NOTED)
- 11. ALL BEAMS AND HEADERS SHALL HAVE (1)2x JACK STUD & (1)2x KING STUD UNLESS OTHERWISE NOTED. THE NUMBER OF STUDS INDICATED ON PLANS ARE THE TOTAL NUMBER OF JACK STUDS REQUIRED, UNLESS
- 12 PROVIDE KING STUDS AT FACH END OF HEADERS AS NOTED BELOW. (1) STUD UP TO 6' OPENING (2) STUDS UP TO 8' OPENING
- (3) STUDS UP TO 9' OPENING
- 13 ALL BEAMS TO BE CONTINUOUSLY SUPPORTED LATERALLY AND SHALL BEAR FULL WIDTH ON THE SUPPORTING WALLS OR COLUMNS INDICATED WITH A MINIMUM OF TWO STUDS, UNLESS OTHERWISE NOTED. ALL BEAM SPLICES SHALL OCCUR OVER SUPPORTS.
- 14. SOLID BLOCKING TO BE PROVIDED AT ALL POINT LOADS THROUGH FLOOR LEVELS TO THE FOUNDATION OR TO OTHER STRUCTURAL COMPONENTS.
- 15. ALL LUMBER SPECIFIED ON DRAWINGS IS INTENDED FOR DRY USE ONLY (MOISTURE CONTENT <19%) UNLESS OTHERWISE NOTED. 16 ALL WATERPROOFING AND FIRE SAFFTY SYSTEMS ARE THE
- RESPONSIBILITY OF THE CONTRACTOR AND ARE TO BE DESIGNED AND DETAILED BY OTHERS 17. ANY WOOD FRAME INTERIOR BEARING WALL STUDS THAT HAVE HOLES IN THE CENTER OF THE STUD UP TO 1" DIAMETER SHALL HAVE STUD
- PROTECTION SHIELDS. ALL HOLES OVER 1" IN DIAMETER FOR PLUMBING LINES, FTC. SHALL BE REPAIRED WITH SIMPSON HSS2 OR USP STS1 STUD SHOES, TYPICAL, UNLESS OTHERWISE NOTED. BEARING WALLS SHALL BE SHEATHED ON NOT LESS THAN ONE SIDE
- WITH OSB OR GYPSUM BOARD, BRIDGING SHALL BE INSTALLED NOT GREATER THAN 4 FEET APART MEASURED VERTICALLY FROM EITHER END OF THE STUD IN LIFT OF SHEATHING.
- 19. DIAGONAL BRACING SHALL BE INSTALLED AT EACH END OF BASEMENT BEARING WALLS AND NOT MORE THAN 20' ON CENTER.

# EXTERIOR WOOD FRAMED DECKS

- DECKS ARE TO BE FRAMED IN ACCORDANCE WITH APPLICABLE BUILDING CODES AND AS REFERENCED ON THE STRUCTURAL PLANS, FITHER THROUGH CODE REFERENCES OR CONSTRUCTION DETAILS. PRESERVATIVE TREATED WOOD FRAMING TO BE SOUTHERN YELLOW
- GUARD RAILS REQUIRED AT DECKS, DESIGN BY OTHERS TO MEET
- MINIMUM CODE REQUIREMENTS. 4. PROVIDE DECK LATERAL LOAD AND BRACING CONNECTIONS PER BUILDING

# RAFTER FRAMED ROOF CONSTRUCTION: 1. PROVIDE 2x4x4'-0" RAFTER TIES AT 48" O.C.

- RAFTERS SHALL BE SUPPORTED BY PURLINS AND PURLIN BRACES AS SHOWN ON THE PLAN, PURLIN BRACES SHALL NOT BEAR ON ANY CEILING JOIST, STRONGBACK OR HEADER UNLESS SPECIFICALLY
- SHOWN ON PLAN. RAFTERS MAY BE SPLICED AT PURLIN LOCATIONS. CFILING JOISTS SHALL HAVE LATERAL SUPPORT W/ 1x4 FLAT BRACING ON TOP EDGE OF JOIST AT LOOSE JOIST ENDS (WHERE JOISTS NOT FASTENED TO RAFTERS) OR FULL DEPTH BLOCKING.
- FASTEN END OF BRACING TO RAFTER OR GABLE END FRAMING. FASTEN RAFTER AND CEILING JOIST WITH (6) 12d NAILS UNLESS OTHERWISE NOTED.
- PROVIDE VERTICAL 2x6 STRONGBACKS AT CEILING JOISTS @ 8'-0" D.C. TIE STRONGBACK ENDS TO GABLE STUDS OR RAFTERS WHERE POSSIBLE, PROVIDE BLOCKING BETWEEN TOP PLATES AND STRONGBACKS, PROVIDE 2x4 FLAT FASTENED TO EACH JOIST WITH (2) 12d NAILS, FASTEN STRONGBACK TO 2x4 FLAT WITH 12d NAILS 12" O.C. AND FASTENED TO EACH JOIST WITH (1) 12d TOENAIL.

# WOOD TRUSSES (FLOOR & ROOF):

- THE WOOD TRUSS MANUFACTURER/FABRICATOR IS RESPONSIBLE FOR THE DESIGN OF THE WOOD TRUSSES. SUBMIT SEALED SHOP DRAWINGS AND SUPPORTING CALCULATIONS TO THE SER FOR REVIEW PRIOR TO FABRICATION, THE SER SHALL HAVE A MINIMUM OF (5) DAYS FOR REVIEW. THE REVIEW BY THE SER SHALL BE FOR OVERALL COMPLIANCE OF THE DESIGN DOCUMENTS. THE SER SHALL ASSUME NO RESPONSIBILITY FOR THE CORRECTNESS OF THE STRUCTURAL DESIGN FOR THE WOOD TRUSSES.
- THE WOOD TRUSSES SHALL BE DESIGNED FOR ALL REQUIRED LOADINGS AS SPECIFIED IN THE LOCAL BUILDING CODE, THE ASCE STANDARD "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES." (ASCE 7), AND THE LOADING REQUIREMENTS SHOWN ON THESE SPECIFICATIONS. THE TRUSS DRAWINGS SHALL BE COORDINATED WITH ALL OTHER CONSTRUCTION DOCUMENTS AND PROVISIONS PROVIDED FOR LOADS SHOWN ON THESE DRAWINGS INCLUDING BUT NOT LIMITED TO HVAC EQUIPMENT, PIPING, AND ARCHITECTURAL FIXTURES ATTACHED TO THE TRUSSES.
- THE TRUSSES SHALL BE DESIGNED, FABRICATED, AND ERECTED IN ACCORDANCE WITH THE LATEST EDITION OF THE ANSI/TPI 1: "NATIONAL DESIGN STANDARD FOR METAL PLATE CONNECTED WOOD TRUSS CONSTRUCTION".
- THE TRUSS MANUFACTURER SHALL PROVIDE ADEQUATE BRACING INFORMATION IN ACCORDANCE WITH "BUILDING COMPONENT SAFETY INFORMATION GUIDE TO GOOD PRACTICE FOR HANDLING, INSTALLING RESTRAINING & BRACING OF METAL PLATE CONNECTED WOOD TRUSSES" (BCSI). THIS BRACING, BOTH TEMPORARY AND PERMANENT, SHALL BE SHOWN ON THE SHOP DRAWINGS, ALSO, THE SHOP DRAWINGS SHALL SHOW THE REQUIRED ATTACHMENTS FOR THE TRUSSES.
- THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING TEMPORARY BRACING AND SHORING FOR THE FLOOR AND ROOF TRUSSES AS REQUIRED DURING CONSTRUCTION. AT A MINIMUM, CONTRACTOR SHALL FOLLOW THE REQUIREMENTS OF THE LATEST BCSI. THE CONTRACTOR SHALL KEEP A COPY OF THE BCSI SUMMARY SHEETS ON SITE.
- THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL PERMANENT TRUSS BRACING SHOWN IN THE STRUCTURAL DRAWINGS AND IN THE TRUSS DESIGNS, ALL CONTINUOUS LATERAL BRACING OF WEBS REQUIRES BRACES, REFER TO BCSI SUMMARY SHEET B3 FOR TYPES OF DIAGONAL BRACES TO PROVIDE AT EACH CONTINUOUS LATERAL BRACE LINE SUCH DIAGONAL BRACES SHALL NOT BE SPACED MORE THAN 20 FEET O.C. DIAGONAL BRACES SHALL BE FASTENED TO EACH TRUSS WEB WITH A MINIMUM OF TWO 10d FACE NAILS. WHERE CONTINUOUS LATERAL BRACING CANNOT BE INSTALLED, DUE TO A MINIMUM OF THREE ADJACENT TRUSSES NOT BEING IDENTICAL. THE CONTRACTOR SHALL COORDINATE WITH THE TRUSS SPECIALTY ENGINEER/MANUFACTURER TO DETERMINE WHAT TYPE OF ALTERNATE BRACE (I.E., T OR L BRACE, ETC.) IS REQUIRED.
- ANY CHORDS OR TRUSS WEBS SHOWN ON THESE DRAWINGS HAVE BEEN SHOWN AS A REFERENCE ONLY. THE FINAL DESIGN OF THE TRUSSES SHALL BE PER THE MANUFACTURER.
- TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH THE SUPPORT LOCATIONS SHOWN ON THE SEALED STRUCTURAL DRAWINGS. TRUSS PROFILES TO BE SEALED BY THE TRUSS MANUFACTURER. TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS
- TRUSS MANUFACTURER TO PROVIDE REQUIRED UPLIFT CONNECTORS FOR ALL TRUSSES. 10. PROVIDE SIMPSON H2.5A, USP RT7 OR EQUIVALENT AT EACH TRUSS TO

TOP PLATE CONNECTION, UNLESS OTHERWISE NOTED.

- WOOD STRUCTURAL PANELS:

  1. FABRICATION AND PLACEMENT OF STRUCTURAL WOOD SHEATHING SHALL BE IN ACCORDANCE WITH THE APA DESIGN/CONSTRUCTION GUIDE "RESIDENTIAL AND COMMERCIAL," AND ALL OTHER APPLICABLE APA STANDARDS.
- 2. ALL REQUIRED WOOD SHEATHING SHALL BEAR THE MARK OF
- WOOD WALL SHEATHING SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL BUILDING CODES FOR THE APPROPRIATE STATE AS INDICATED ON THESE DRAWINGS REFER TO WALL BRACING NOTES IN PLAN SET FOR MORE INFORMATION. EXTERIOR WALLS TO BE FULLY SHEATHED USING 1/6" OSB OR PLYWOOD MINIMUM. AT BRACED WALL PANELS, PROVIDE BLOCKING AT ALL SHEET EDGES NOT FALLING ON STUDS
- OR PLATES. ROOF SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ROOF SHEATHING SHALL BE CONTINUOUS OVER TWO SUPPORTS MINIMUM AND ATTACHED TO ITS SUPPORTING ROOF FRAMING WITH 8d NAILS AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED WITH THE LONG DIRECTION PERPENDICULAR TO FRAMING SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE FRAMING SPACING, PROVIDE SUITABLE EDGE SUPPORT BY USE OF PLYWOOD CLIPS OR LUMBER BLOCKING UNLESS OTHERWISE NOTED. PANEL END JOINTS SHALL OCCUR OVER FRAMING. ROOF SHEATHING TO BE %6" OSB MINIMUM
- WOOD FLOOR SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2, ATTACH SHEATHING TO ITS SUPPORTING FRAMING WITH (1) 10d NAIL AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS, SHEATHING SHALL BE APPLIED PERPENDICULAR TO FRAMING. SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE FRAMING SPACING, PROVIDE SUITABLE EDGE SUPPORT BY USE OF T&G PLYWOOD OR LUMBER BLOCKING UNLESS OTHERWISE NOTED. PANEL END JOINTS SHALL OCCUR OVER FRAMING.
- 6. SHEATHING SHALL HAVE A 1/8" GAP AT PANEL ENDS AND EDGES AS RECOMMENDED IN ACCORDANCE WITH THE APA

### STRUCTURAL FIBERBOARD PANELS:


- STRUCTURAL FIBERBOARD SHEATHING SHALL ONLY BE USED WHERE SPECIFICALLY NOTED ON THE STRUCTURAL PLANS.
  FABRICATION AND PLACEMENT OF STRUCTURAL FIBERBOARD
- SHEATHING SHALL BE IN ACCORDANCE WITH THE APPLICABLE AFA STANDARDS.
- FIBERBOARD WALL SHEATHING SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL BUILDING CODES FOR THE APPROPRIATE STATE AS INDICATED ON THESE DRAWINGS. REFER TO WALL BRACING NOTES IN PLAN SET FOR MORE INFORMATION.
- SHEATHING SHALL HAVE A 1/8" GAP AT PANEL ENDS AND EDGES AS RECOMMENDED IN ACCORDANCE WITH THE AFA.

# STRUCTURAL STEEL:

- STRUCTURAL STEEL SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION "CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES" AND OF THE MANUAL OF STEEL CONSTRUCTION "LOAD RESISTANCE FACTOR DESIGN" LATEST EDITIONS.
- ALL STEEL SHALL HAVE A MINIMUM YIELD STRESS (Fy) OF 50 KSI UNLESS OTHERWISE NOTED.
- WELDING SHALL CONFORM TO THE LATEST EDITION OF THE AMERICAN WELDING SOCIETY'S STRUCTURAL WELDING CODE AWA D1.1. ELECTRODES FOR SHOP AND FIELDING WELDING SHALL BE CLASS E70XX. ALL WELDING SHALL BE PERFORMED BY A CERTIFIED WELDER PER THE ABOVE STANDARDS.
- ALL STEEL BEAMS TO BE SUPPORTED AT EACH END WITH A MINIMUM BEARING LENGTH OF 31/2" AND FULL FLANGE WIDTH UNLESS OTHERWISE NOTED, BEAMS MUST BE ATTACHED AT EACH END WITH A MINIMUM OF FOUR 16d NAILS OR (2) 1/2" x 4" LAG SCREWS UNLESS OTHERWISE NOTED.
- INSTALL 2x WOOD PLATE ON TOP OF STEEL BEAMS, RIPPED TO MATCH BEAM WIDTH. FASTEN PLATE TO BEAM W/ HILTI X-DNI 52 P8 PINS AT 12" O.C. STAGGERED OR 12" DIAMETER BOLTS AT 24"

# MECHANICAL FASTENERS

- ALL METAL HARDWARE AND FASTENERS TO BE SIMPSON STRONG-TIE OR APPROVED EQUIVALENT.
- ALL HARDWARE AND FASTENERS IN CONTACT WITH PRESERVATIVE PRESSURE TREATED LUMBER SHALL BE HOT DIPPED GALVANIZED IN ACCORDANCE WITH ASTM A 153, G-185.
- MANY OF THE NEW PRESSURE TREATED WOODS USE CHEMICALS THAT ARE CORROSIVE TO STEEL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THE TYPE OF WOOD TREATMENT AND SELECT APPROPRIATE CONNECTORS THAT WILL RESIST THE APPLICABLE CORROSIVE CHEMICALS.



SPAN	LINTEL SIZE	END BEARING
UP TO 3'-0"	3½"x3½"x¼"	4"
UP TO 6'-3"	5"x3½"x5/s" L.L.V.	8"
UP TO 9'-6"	6"x3½"x5/ <sub>6</sub> " L.L.V.	12"



IEERING KERTOWN, PA 18951 (215) 804-4449 NIS US S Ш

M. M. 30 2 0  $\supset Z$ 

Carolina

Not

0

Stru

O

Project #: 105-19000 Designed By: KRK Checked By: Issue Date: 1/1/19 Re-Issue

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34





ans

屲

 $\bigcirc$ 

B

Option Plan

Crawl Space Foundation F Elevations 'A1', 'A2' & Op Kenzie Model — LH Group to 130 M.P.H.


Project #: 105-19004

Designed By: KRK Checked By: Issue Date: 8/29/19 Re-Issue: 4/30/20 Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

FLOOR FRAMING TO BE 14" DEEP TJI 110 SERIES OR EQUAL, SPACING PER

- UNDER PORTAL FRAME PER DETAIL B/SD-4.
- 14) DECK FRAMING NOTES: -DECK CONSTRUCTION PER NCRC, APPENDIX M, U.N.O. -GUARD RAIL REQUIRED, DESIGN BY OTHERS (TYP.)
  -PROVIDE LATERAL BRACING PER NCRC, APPENDIX M.



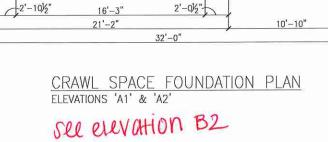

36"x36"x16"-

DEEP CONCRETE

FOOTING

SEE KEYNOTE 14 FOR DECK FRAMING NOTES.

12'-0"

\_\_\_\_\_\_

6'-0"

(3)2x10

6'-0"

(3)2x10

-SIMPSON

LUS28

14" I-JOIST PER SUPPLIER

LINE OF KITCHEN ISLAND ABOVE-

DOUBLE JOIST

DOUBLE JOIST

LINE OF KITCHEN

15'-8¾"

RIM BOARD (TYP.)

21'-61/2"

GARAGE SLAB

4" THICK CONCRETE SLAB W/

BARRIER ON 95% COMPACTED

FIBERMESH ON 6 MIL VAPOR

FILL. SLOPE 1/8" PER 1'-0" TOWARDS DOOR.

22'-0"

-8" WIDE SLAB

TURNDOWN @

DOOR OPENING

COUNTER ABOVE

ADDITIONAL JOIST

-36"x36"x16"

DEEP CONCRETE

FOOTING

7777

LINE OF-BRICK @

ELEVATION 'A2'

32'-0"

18'-0"

8" CMU FOUNDATION ON 8" DEEP x-8" CMU FOUNDATION ON 8" DEEP x 16" WIDE CONCRETE FOOTING 8" DEEP x 20" WIDE @ BRICK VENEER (TYP.)

x 20" WIDE @ BRICK VENEER (TYP.)

DOUBLE JOIST @ BEARING WALL ABOVE

(2)13/4"x14" LVL

FLUSH @ BEARING

WALL ABOVE

ADDITIONAL JOIST

14" I-JOIST PER SUPPLIER

1111111111111111 10'-0"

4" THICK CONCRETE

SLAB W/ FIBERMESH

ON 95% COMPACTED

FILL

LINE OF-

BEARING

WALL ABOVE

10'-5%"

~24"x24"x12" DEEP CONCRETE FOOTING (MIN. U.N.O.)

5'-0"

DOUBLE

8" CMU FOUNDATION ON 8" DEEP x 16" WIDE CONCRETE FOOTING 8" DEEP

-8" CMU FOUNDATION ON 8"

DEEP x 16" WIDE CONCRETE

FOOTING 8" DEEP x 20" WIDE

@ BRICK VENEER (TYP.)

x 20" WIDE @ BRICK VENEER (TYP.)

OPT. FIREPLACE

6x6 P.T. POST W/ SIMPSON

ABA66 BASE & BCS2-3/6

CAP ON 24"x24"x12" DEEP

CONCRETE FOOTING (TYP)

-2x10 P.T. LEDGER W/

(2) ROWS ½" DIA HDG BOLTS @ 16" O.C.

BEAM POCKET,

GROUT SOLID

∕-(TYP.)

RIM BOARD (TYP.)

SEE KEYNOTE 14 FOR DECK FRAMING NOTES.

\_\_\_\_

14" I-JOIST PER SUPPLIER

PARTIAL FOUNDATION PLAN OPT. EXTENDED COV. PORCH

8'-0"

(3)2x10 P.T.

-6x6 P.T. POST W/ SIMPSON

ABA66 BASE & BCS2-3/6

CAP ON 24"x24"x12" DEEP

CONCRETE FOOTING (TYP) -2x10 P.T. LEDGER W/

SEE PIER AND

FOOTING

SCHEDULE (TYP.)


PIER ELEV. TO BE 9¼" BELOW TOP OF WALL ELEV. (TYP.)

(2) ROWS ½" DIA HDG BOLTS @ 16" O.C.

8'-0"


(3)2x10 P.T.

SIMPSON LUS28



MANUFACTURER.

7) REINFORCE 8" CMU WALL AND FOOTING

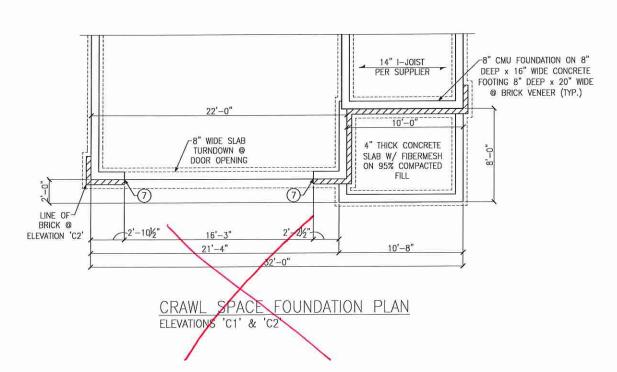







PROVIDE SOLID BLOCKING

WITHIN FLOOR SYSTEM TO MATCH POST SIZE ABOVE.

=== BEARING WALL ABOVE  $\square$ ШШШІГ  $\Longrightarrow$  INTERIOR BEARING WALL

48" WSP

SSSSS 

BRACED WALL PANEL (SEE KSE STRUCTURAL DETAILS SET FOR BRACED WALL PANEL SHEATHING FASTENING & BLOCKING DETAILS)

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES AND TYPICAL DETAILS

FLOOR FRAMING TO BE 14" DEEP TJI 110 SERIES OR EQUAL, SPACING PER MANUFACTURER.

### KEYNOTES:

- 7) REINFORCE 8" CMU WALL AND FOOTING UNDER PORTAL FRAME PER DETAIL B/SD-4.
- (14) DECK FRAMING NOTES: -DECK CONSTRUCTION PER NCRC, APPENDIX M, U.N.O. -GUARD RAIL REQUIRED, DESIGN BY OTHERS (TYP.) -PROVIDE LATERAL BRACING PER NCRC, APPENDIX M.



Framing \$ 22 - Pg % Crawl Space Foundation Pl Elevations 'B1', 'B2', 'C1' Kenzie Model — LH Gup to 130 M.P.H.

Plans

Project #: 105-19004 Designed By: KRK Checked By:

Issue Date: 8/29/19
Re-Issue: 4/30/20
Scale: 1/8"=1'-0" @ 11x17
1/4"=1'-0" @ 22x34








Plans

Framing

Ø

 $\overline{\Box}$ 

Foundation

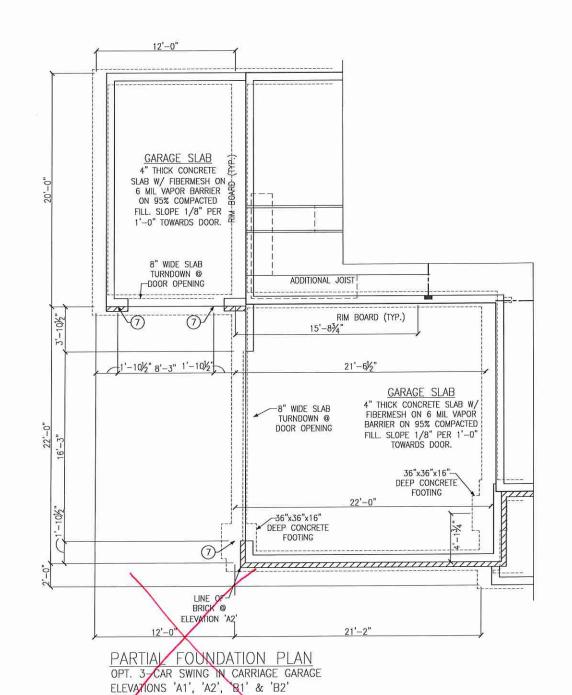

12'-23/4"

GARAGE SLAB

4" THICK CONCRETE SLAB W/ FIBERMESH ON 6 MIL VAPOR BARRIER ON 95% COMPACTED FILL. SLOPE 1/8" PER 1'-0" TOWARDS DOOR.

> 8" WIDE SLAB TURNDOWN @

DOOR OPENING

1'-10/2" 8

OPT. 1 CAR GARAGE

ELEVATIONS 'A1', 'A2', 'B1' & 'B2'

ADDITIONAL JOIST

-8" WIDE SLAB

TURNDOWN @

DOOR OPENING

\_36"x36"x16"

DEEP CONCRETE

FOOTING

15'-83/4"

1'-10/2'

FOUNDATION PLAN

RIM BOARD (TYP.)

21'-6/2"

22'-0"

minimum minimu

PARTIAL FOUNDATION PLAN OPT. SIDE LOAD GARAGE

ELEVATIONS 'A1', 'A2', 'B1' & 82'

GARAGE SLAB

4" THICK CONCRETE SLAB W/

FIBERMESH ON 6 MIL VAPOR

BARRIER ON 95% COMPACTED

FILL. SLOPE 1/8" PER 1'-0"

TOWARDS DOOR.

36"x36"x16"— DEEP CONCRETE

FOOTING

LINE OF BRICK @ ELEVATION 'A2'

7

LINE OF-BRICK @

ELEVATION 'A2'

8" DEEP x 16" WIDE THICKENED

\_\_SLAB (TYP.)

\_36"x36"x16" DEEP CONCRETE

FOOTING



PROVIDE SOLID BLOCKING

WITHIN FLOOR SYSTEM TO MATCH POST SIZE ABOVE.

⇒ BEARING WALL ABOVE ПШШШІ ⇒ INTERIOR BEARING WALL

48" WSP

⇒ BRACED WALL PANEL (SEE KSE STRUCTURAL DETAILS SET FOR BRACED WALL PANEL SHEATHING FASTENING & BLOCKING DETAILS)

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES AND TYPICAL DETAILS

FLOOR FRAMING TO BE 14" DEEP TJI 110 SERIES OR EQUAL, SPACING PER MANUFACTURER.

- 7 REINFORCE 8" CMU WALL AND FOOTING UNDER PORTAL FRAME PER DETAIL B/SD-4.
- (14) DECK FRAMING NOTES: -DECK CONSTRUCTION PER NCRC, APPENDIX M, U.N.O. -GUARD RAIL REQUIRED, DESIGN BY OTHERS (TYP.) -PROVIDE LATERAL BRACING PER NCRC, APPENDIX M.





Crawl Spuce.

Options

Kenzie Model – LH
Up to 130 M.P.H. Project #: 105-19004 Designed By: KRK Checked By: Issue Date: 8/29/19 Re-Issue: 4/30/20 Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34



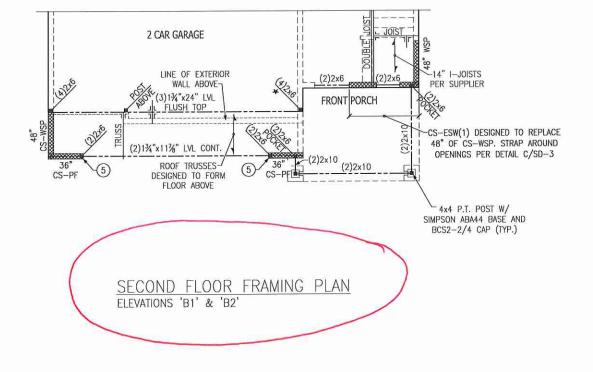

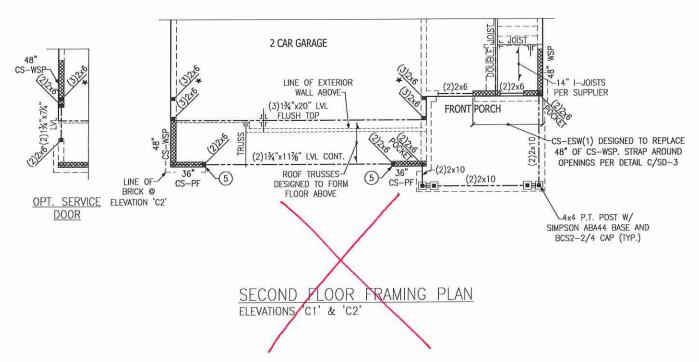



PROVIDE SOLID BLOCKING
WITHIN FLOOR SYSTEM TO MATCH POST SIZE ABOVE.

⇒ BEARING WALL ABOVE 48" WSP

DⅢⅢIII ⇒ INTERIOR BEARING WALL ⇒ BRACED WALL PANEL (SEE KSE STRUCTURAL DETAILS

SET FOR BRACED WALL PANEL SHEATHING FASTENING & BLOCKING DETAILS)

→ NO HEADER REQUIRED REFER TO KSE STRUCTURAL DETAILS SET

FOR GENERAL STRUCTURAL NOTES AND TYPICAL DETAILS PLAN DESIGNED WITH 9' WALL PLATES

FLOOR FRAMING TO BE 14" DEEP TJI 110 SERIES OR EQUAL, SPACING PER MANUFACTURER.

# KEYNOTES:

4 INSTALL ONE PANEL CS-PF PORTAL FRAME PER DETAIL A OR B/SD-4.

5 INSTALL TWO PANEL CS-PF PORTAL FRAME PER DETAIL A OR B/SD-4.

Second Floor Framing Plans
Elevations 'B1', 'B2', 'C1' & '
Kenzie Model — LH
Carolina Division


,C2,

Project #: 105-19004 Designed By: KRK Checked By:

Issue Date: 8/29/19 Re-Issue: 4/30/20 Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34





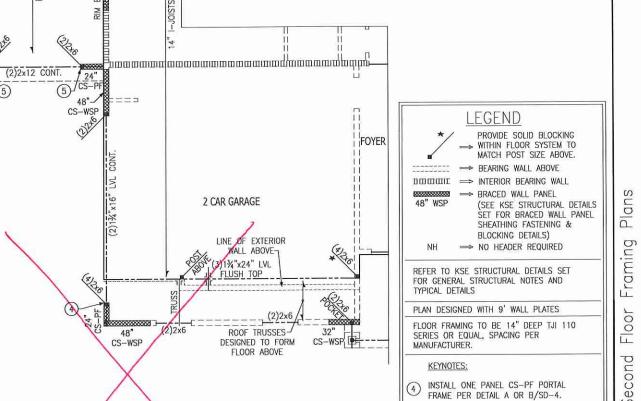



INSTALL TWO PANEL CS-PF PORTAL FRAME PER DETAIL A OR B/SD-4.

Model — LH 130 M.P.H. a Division Floor Second F Options Kenzie M Up to 13 Carolina Project #: 105-19004

Designed By: KRK

Issue Dote: 8/29/19
Re-Issue: 4/30/20
Scale: 1/8"=1'-0" @ 11x17
1/4"=1'-0" @ 22x34

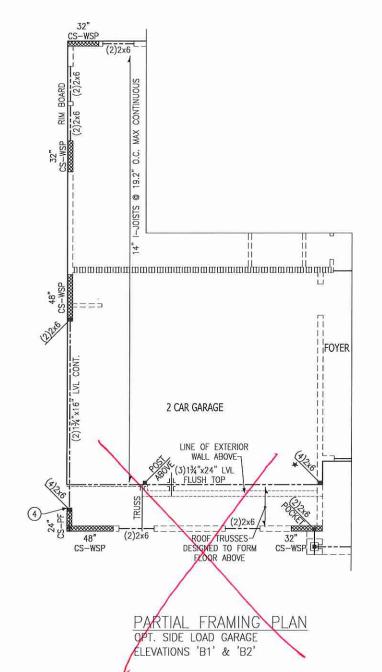

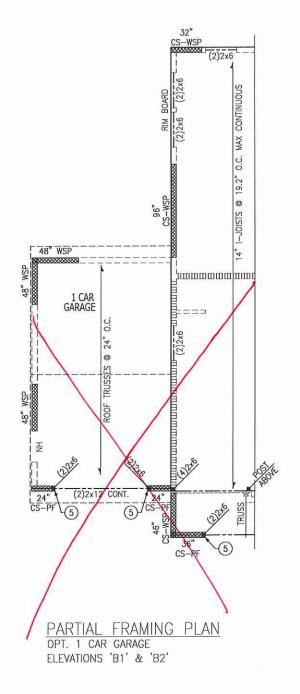

48" WSP

1 CAR GARAGE

CS-WSP


PARTIAL FRAMING PLAN
OPT. 3-CAR SWING IN CARRIAGE GARAGE

ELEVATIONS 'B1' & 'B2'









SET FOR BRACED WALL PANEL SHEATHING FASTENING & BLOCKING DETAILS)

→ NO HEADER REQUIRED

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES AND TYPICAL DETAILS

PLAN DESIGNED WITH 8' WALL PLATES

KEYNOTES:

(10) 8'x12' HVAC PLATFORM TRUSSES DESIGNED TO SUPPORT HVAC UNITS.

1) 2x6 OVERFRAMING W/ 2x8 RIDGE AND VALLEY PLATES OR VALLEY SET TRUSSES @ 24" O.C. (TYP.)



Roof Framing Plan Elevations 'B1' & 'B Kenzie Model – LH Up to 130 M.P.H. Project #: 105-19004 Designed By: KRK Checked By: Issue Date: 8/29/19
Re-Issue: 4/30/20
Scale: 1/8"=1'-0" @ 11x17
1/4"=1'-0" @ 22x34

,B2,













1/2" (MIN) GYPSUM WALLBOARD. FASTEN TO WALL ALL SUPPORTS (STUDS, PLATES, BLOCKING) WITH 1.25" TYPE W SCREWS AT 7" O.C. COR 5d COOLER NAILS AT 7" O.C.) 2x4 BLOCKING BTWN VERTICAL WALL 2x6 FULL HEIGHT STUD STUDS AT ALL AT WALL INTERSECTION HORIZONTAL GYPSUM BRACED -(2x8 STUD AT SHEATHING JOINTS. -WALL-INTERSECTING 2x6 WALL) "T" PLATE WALL INTERSECTION 3-STUD WALL

> BRACED WALL INTERSECTIONS MAY BE FRAMED USING EITHER THE 3-STUD OR THE T-PLATE METHOD.

C METHOD GB(1) AND GB(2) INTERSECTION DETAILS

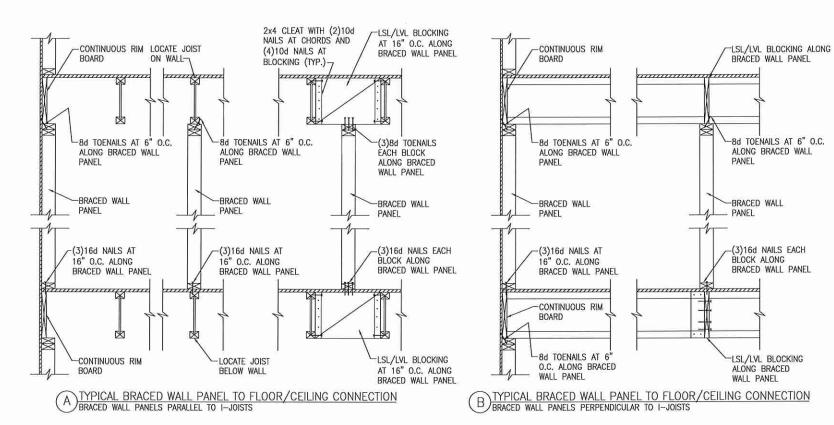

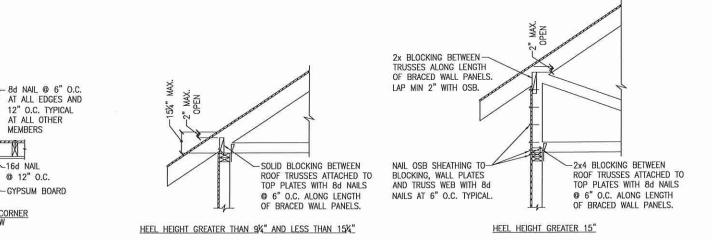

DTYPICAL EXTERIOR CORNER WALL FRAMING

FXTFRIOR

SHEATHING -

GYPSUM BOARD

16d NAIL -

@ 12" O.C.

EXTERIOR SHEATHING-

12" O.C. TYPICAL AT ALL OTHER

MEMBERS

@ 12" O.C.

-GYPSUM BOARD

16d NAII

OUTSIDE CORNER PLAN VIEW

ROOF TRUSS BEARING/BLOCKING AT BRACED WALL PANELS ONLY REQUIRED AT BRACED WALL PANELS

Project #: 105-19000 Designed By: KRK Checked By: Issue Date: 1/1/19 Re-Issue:

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

M.P.H.

130

Carolina

라 단 유

Detai

Wall









ENGINEERING

E, SUITE 201, QUAKERTOWN, PA 18951

COM

(215) 804-4449



SHEAR WALL, SEE SCHEDULE AND PLANS FOR LOCATION -HOLD DOWN INSTALLED PER -(2) 2x FULL HEIGHT HOLD DOWN SCHEDULE THIS STUD W/ 10d NAILS © 6" O.C. EACH PLY SHEET, SEE PLANS FOR TYPE AND LOCATION. -2x FULL HEIGHT STUDS W/ 16d NAILS @ 6" O.C.

A TYPICAL HOLD DOWN DETAIL

-HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET, SEE

PLANS FOR TYPE AND LOCATION.

(D)HOLD DOWN AT MONOLITHIC SLAB FOUNDATION


-A36 ALL THREAD ROD DRILLED AND

EPOXIED 6" INTO FOOTING USING SIMPSON


"SET"/"ET" OR USP CIA-GEL ADHESIVE.

# 2x FULL HEIGHT SHEAR WALL, SEE SCHEDULE AND PLANS FOR LOCATION STUD W/ 16d NAILS @ 6" O.C.-(2)2x FULL HEIGHT — STUD W/ 10d NAILS HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET, SEE PLANS FOR TYPE AND LOCATION. @ 6" O.C. EACH PLY

B TYPICAL HOLD DOWN DETAIL

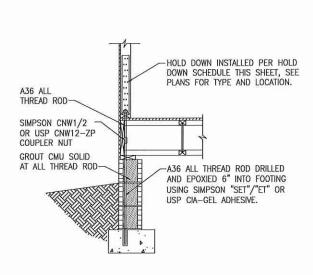

(E)HOLD DOWN AT CRAWL SPACE FOUNDATION

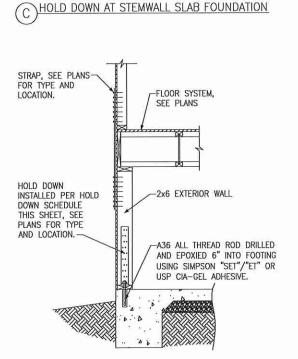


-HOLD DOWN INSTALLED PER HOLD

DOWN SCHEDULE THIS SHEET, SEE PLANS FOR TYPE AND LOCATION.

-A36 ALL THREAD ROD DRILLED AND EPOXIED 6" INTO FOOTING USING SIMPSON

"SET"/"ET" OR USP CIA-GEL ADHESIVE.

F HOLD DOWN AT BASEMENT FOUNDATION MONOLITHIC TURN-DOWN

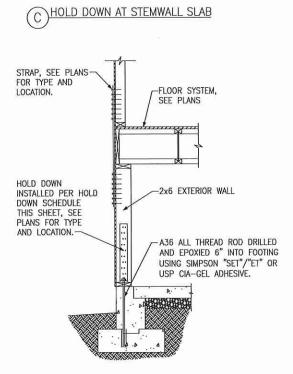

SIMPSON HOLD DOWN INSTALLED PER

HOLD DOWN SCHEDULE THIS SHEET

A36 ALL THREAD ROD DRILLED AND

EPOXIED 6" INTO FOOTING USING

SIMPSON "SET" OR "ET" ADHESIVE.

G HOLD DOWN AT BASEMENT FOUNDATION STEM WALL

	HOLI	DOWN SCH	EDULE
HOLD SIMPSON	DOWN USP	ALL THREAD ROD	FASTENERS
LTT20B	LTS20B	½" DIA.	(10)10d NAILS
HTT4	HTT16	%" DIA.	(18)16dx2½" LONG NAILS
НТТ5	HTT45	%" DIA.	(26)16dx2½" LONG NAILS




$\sim$	. 0
	라 다
Holo	Up Nor
Project #: 1	105-19000
Designed By: H	KRK
Checked By:	
Issue Date: 1	1/1/19
Re-Issue:	
Scale: 1/8"=1 1/4"=1	l'-0" @ 11x17 l'-0" @ 22x34

Detai

130 M.P.H.

Carolina

ONE BRACED WALL SEGMENT

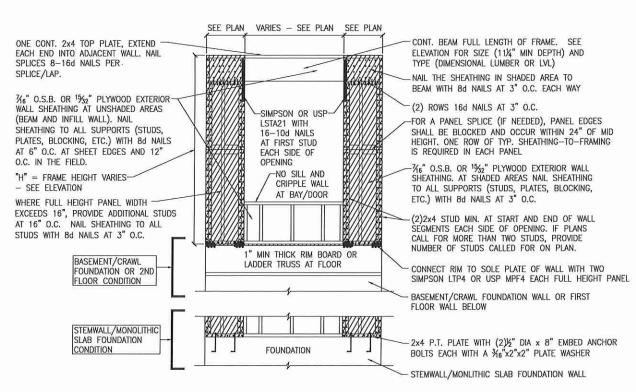


B METHOD CS-PF: CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION TWO BRACED WALL SEGMENTS

	BRACED WALL	. PANEL AN	ID ENGINEERED SHEAR WALL SCHEDULE
PANEL TYPES	PANEL TYPE	MATERIAL	FASTENERS
WSP	INTERMITTENT WOOD STRUCTURAL PANEL	7/16" OSB	6D OR 8D COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. ENGINEERED ALTERNATIVE: 16 GAGE BY 1.75" LONG STAPLES AT 3" O.C. AT SHEET EDGES AND 6" O.C. AT INTERMEDIATE SUPPORTS
GB(1)	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
GB(1)-4	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 4" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
GB(2)	INTERMITTENT GYPSUM BOARD (SHEATHING BOTH FACES OF WALL)	1/2" GYPSUM	$1.5^{\prime\prime}$ Long Galv. Roofing Nails, 6d common Nails, or $1.25^{\prime\prime}$ Long type W Drywall screws at 7" o.c. at sheet edges and intermediate supports.
CS-WSP	CONTINUOUS SHEATHED WOOD STRUCTURAL PANEL	7/16" OSB	6D OR 8D COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. <u>ENGINEERED ALTERNATIVE</u> : 16 GAGE BY 1.75" LONG STAPLES AT 3" O.C. AT SHEET EDGES AND 6" O.C. AT INTERMEDIATE SUPPORT
CS-PF	CONTINUOUS SHEATHED PORTAL FRAME	7/16" OSB	NAILING PER DETAIL
PFH	PORTAL FRAME WITH HOLD DOWNS	7/16" OSB	NAILING PER DETAIL
CS-ESW(1)	ENGINEERED SHEAR WALL, TYPE 1	7/16" OSB	8D COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS
CS-ESW(2)	ENGINEERED SHEAR WALL, TYPE 2	7/16" OSB	8D COMMON NAILS AT 4" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS
CS-ESW(3)	ENGINEERED SHEAR WALL, TYPE 3	7/16" OSB	8D COMMON NAILS AT 3" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS

## BRACED WALL PANEL NOTES:

- 1. ALL BRACED WALL PANELS, EXCEPT GB(1) & GB(2), SHALL HAVE 2x BLOCKING BETWEEN WALL STUDS AT ALL HORIZONTAL SHEET EDGES.
- 2. PROVIDE NAILING/BLOCKING ABOVE AND BELOW ALL BRACED WALL PANELS PER KSE BRACED WALL DETAILS.
- 3. SHEATH ALL EXTERIOR WALLS OF THE HOUSE WITH 1/6" O.S.B., OR 15/2" PLYWOOD, FASTENED PER IRC. AT EXTERIOR CORNERS, SHEATHING SHALL BE FASTENED PER KSE BRACED WALL DETAILS. AT INTERIOR WALL INTERSECTIONS, FASTEN STUDS & WALL BRACING PER KSE BRACED WALL DETAILS.
- . BRACED WALL PANELS AND ENGINEERED SHEAR WALLS ARE PROVIDED PER IRC. PANEL LENGTHS SHOWN ON PLANS ARE THE MINIMUM LENGTH REQUIRED.

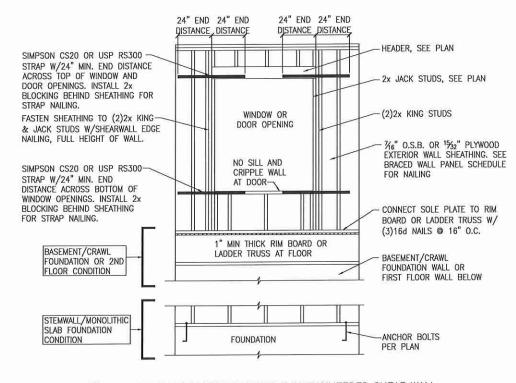

WINDOW OR DOOR REINFORCEMENT IN ENGINEERED SHEAR WALL ONLY REQUIRED WHERE SPECIFED ON PLANS





Braced Wall Notes & D

Project #: 105-19000
Designed By: KRK
Checked By:

M M

30

2

9 5


arolina

0

Issue Date: 1/1/19 Re-Issue:

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

SD-3

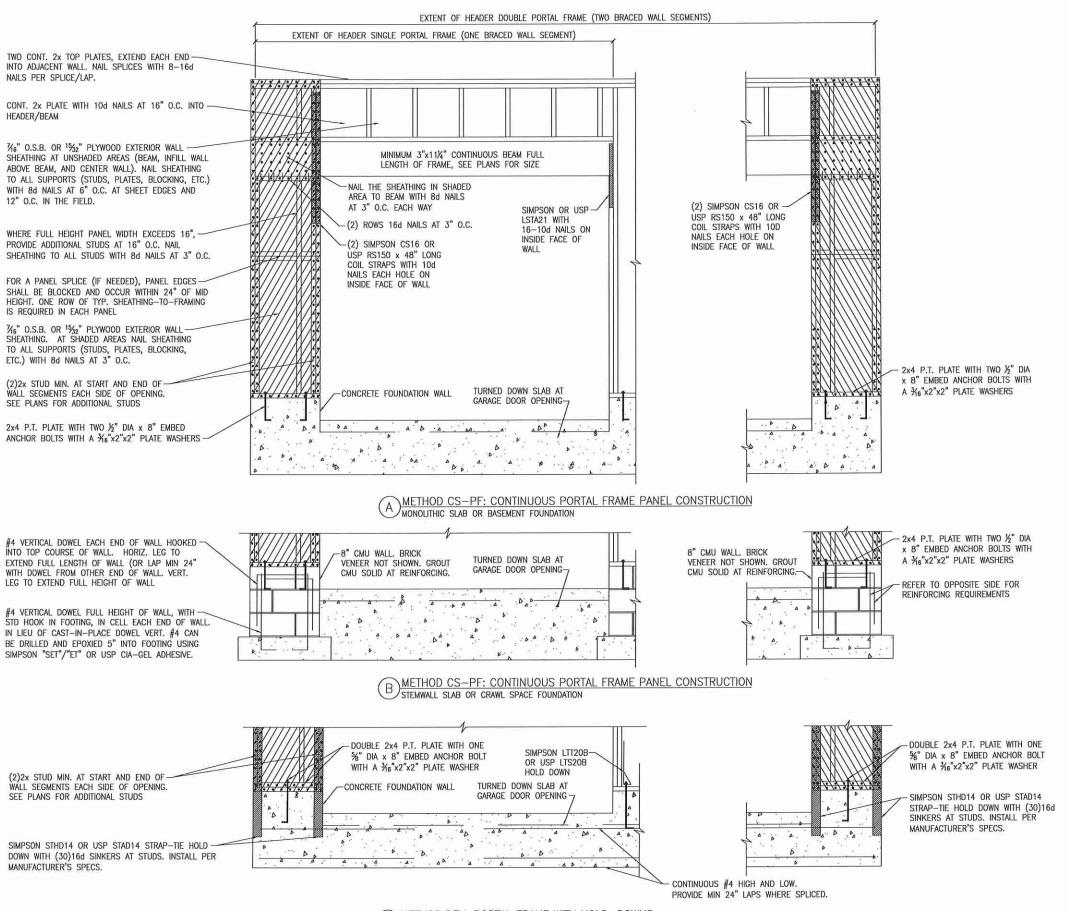

IGINEERING E 201, QUAKERTOWN, PA 18951 (215) 804-4449



Detail Пe 뒫

Project #: 105-19000 Designed By: KRK

Checked By:

Issue Date: 1/1/19 Re-Issue


Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

M.P.H.


roli: 30

 $\circ$ 

9 5

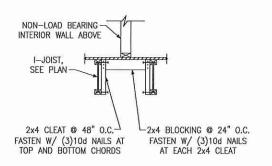

C I-JOIST LADDER BLOCKING AS REQUIRED @ PARALLEL WALLS

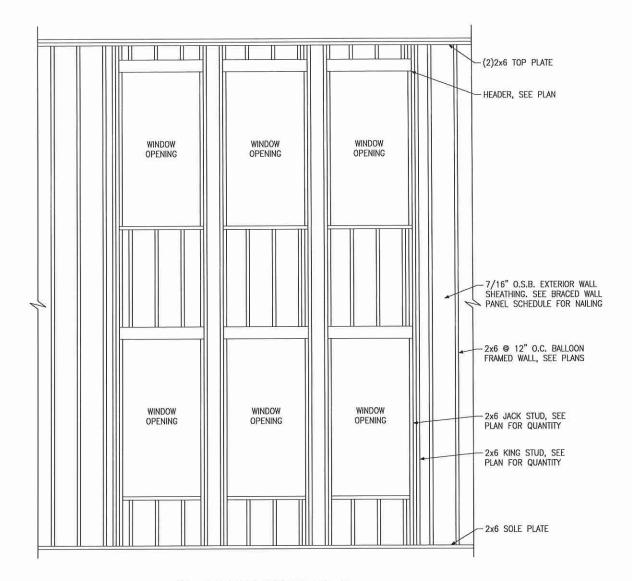



Detail Framing Miscellaneous

Up to North

Project #: 105-19000 Designed By: KRK Checked By:

Issue Date: 1/1/19 Re-Issue:

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

130 M.P.H. Carolina

ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
COM (215) 804-4449

S

SD-5

Detail Framing scellaneous

p to orth Ξž Project #: 105-19000

130 M.P.H.


2


arolin Ö

Designed By: KRK Checked By:

Issue Date: 1/1/19

Re-Issue: Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

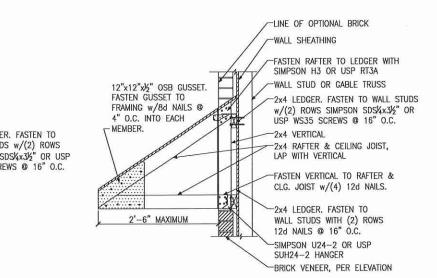

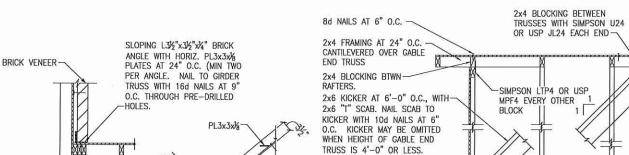

ROOF GIRDER TRUSS TO SUPPORT DEAD LOAD OF BRICK, LIMIT DEFLECTION TO L/600 OR 0.3" MAX.,

(D)TRUSS DETAIL

(E)GABLE END WALL DETAIL

-(2) SIMPSON GBC OR ÙŚP HC520 EACH KICKER 24" O.C.

7/6" OSB AT GABLE END-TRUSS, PER SHEAR WALL EDGE NAILING PER SHEAR WALL SCHEDULE PER SHEAR WALL ABOVE (6" O.C. AT NON-SHEAR WALLS)

SPACED PER SHEAR WALL BELOW ENTIRE GABLE END

- ROOF TRUSSES AT

SIMPSON A35 OR USP MPA1

B PENT ROOF DETAIL
STRAIGHT ROOF

USP SUH24-2 HANGER BRICK VENEER, PER ELEVATION A PENT ROOF DETAIL CURVED ROOF

2x4 LEDGER, FASTEN TO WALL STUDS O.C. INTO EACH MEMBER.w/(2) ROWS SIMPSON SDS¼x3½" OR USP WS35 SCREWS @ 16" O.C. 2x12 RAFTER WITH -2x4 VERTICAL CURVED PROFILE -2x4 CEILING JOIST. CUT INTO RAFTER LAP WITH VERTICAL -FASTEN VERTICAL TO RAFTER & CLG. JOIST w/(4) 12d NAILS. 2x4 LEDGER. FASTEN TO 2'-6" MAXIMUM WALL STUDS WITH (2) ROWS 12d NAILS @ 16" O.C.

OSB GUSSET, CUT TO MATCH ROOF PROFILE

FASTEN GUSSET TO

FRAMING w/8d NAILS @ 4"

2x WALL

STUDS, SEE PLAN

-LINE OF OPTIONAL BRICK

-WALL SHEATHING

FASTEN RAFTER TO LEDGER WITH SIMPSON H3 OR USP RT3A -WALL STUD OR GABLE TRUSS 2x12 RAFTER WITH CURVED PROFILE 2x4 VERTICAL CUT INTO RAFTER-OSB GUSSET, CUT TO-MATCH ROOF PROFILE FASTEN GUSSET TO

-2x4 LEDGER, FASTEN TO

WALL STUDS w/(2) ROWS WS35 SCREWS @ 16" O.C.

-8d NAILS AT 4" O.C.

(5) 10d-

7/6" OSB WALL-SHEATHING

-SIMPSON U24-2 OR

FRAMING w/8d NAILS @ 4" O.C. INTO EACH MEMBER.


SIMPSON SDS4x31/2" OR USP


12d NAILS OR GABLE TRUSS WITH (2) ROWS 12d NAILS @ 16" O.C.


C EYEBROW ROOF DETAIL
STRAIGHT ROOF

-2x4 LEDGER, FASTEN TO WALL STUDS w/(2) ROWS SIMPSON SDS¼x3½" OR USP WS35 SCREWS @ 16" O.C. -2x4 RAFTER & CEILING JOIST, LAP AND FACE NAIL WITH (4) -2x4 LEDGER. FASTEN TO WALL

-WALL STUD OR GABLE TRUSS

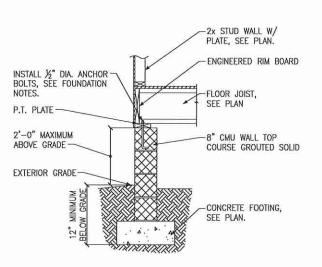

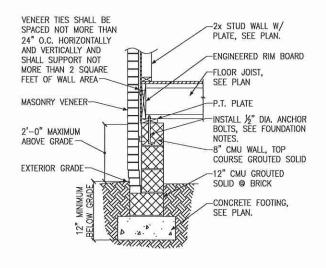

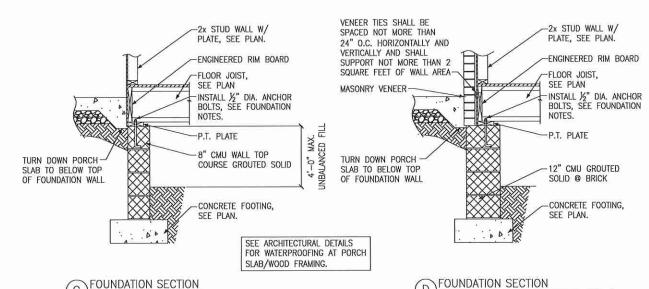





FOUNDATION SECTION

EXTERIOR GARAGE WALL @ MASONRY VENEER

VENEER TIES SHALL BE

AND VERTICALLY AND

SHALL SUPPORT NOT

MORE THAN 2 SQUARE

FEET OF WALL AREA-


INSTALL ½" DIA. ANCHOR-BOLTS, SEE FOUNDATION

MASONRY VENEER-

EXTERIOR GRADE

NOTES.

SPACED NOT MORE THAN 24" O.C. HORIZONTALLY





-4" GRAVEL FILL OR

CONCRETE FOOTING,

COMPACTED SOIL

SEE PLAN.

GROUP 1 CLASSIFIED SOIL

GARAGE SPACE

P.T. PLATE -

EXTERIOR WALL AT PORCH W/ MASONRY VENEER

LIVING SPACE

-2x STUD WALL W/

PLATE, SEE PLAN.

FLOOR JOIST,

SEE PLAN

-ENGINEERED RIM BOARD

—INSTALL ½" DIA. ANCHOR BOLTS, SEE FOUNDATION

-8" CMU WALL TOP COURSE GROUTED SOLID

-CONCRETE FOOTING,

SEE PLAN.

FOUNDATION SECTION H) FOUNDATION SEE

-2x STUD WALL W/ P.T. PLATE, SEE PLAN. -8" CMU WALL TOP INSTALL ½" DIA. ANCHOR—BOLTS, SEE FOUNDATION COURSE GROUTED SOLID NOTES. STEP VARIES EXTERIOR GRADE -4" GRAVEL FILL OR GROUP 1 CLASSIFIED SOIL COMPACTED SOIL -CONCRETE FOOTING. SEE PLAN.

FOUNDATION SECTION EXTERIOR GARAGE WALL

	ENGINEERED RIM BOARD, DO NOT SPLICE WITHIN 6" OF VENT OPENING
	FACE MOUNT JOIST HANGER, FILL ALL HOLES WITH 10d NAILS CLINCHED
4,	2x P.T. SILL PLATE, DO NOT SPLICE WITHIN 6" OF VENT OPENING
16" VENT-OPENING	A I

STEP VARIES

COMPACTED SOIL

SOLID @ BRICK

SEE PLAN.

-12" CMU GROUTED

CONCRETE FOOTING,

PIER AND FOOTING SCHEDULE


G FOUNDATION SECTION GARAGE DOOR

EXTERIOR WALL AT PORCH

PIER HEIGHT PIER SIZE MIN. FOOTING SIZE UP TO 2'-8" 8" x 16" 24" x 24" x 12" U.N.O.
UP TO 5'-4" 16" x 16" 24" x 24" x 12" U.N.O.
UP TO 8'-0" 16" x 16" 30" x 30" x 12" U.N.O.

PIERS SHALL BE CAPPED WITH 8" OF SOLID

MASONRY OR CONCRETE OR TOP COURSE FILLED SOLID WITH CONCRETE/MORTAR. PIERS OVER 5'-4" SHALL BE BE FILLED SOLIDLY WITH CONCRETE OR TYPE M OR S MORTAR. FOR PIERS OVER 8'-0" CONTACT KSE ENGINEERING FOR PIER AND FOOTING DESIGN.

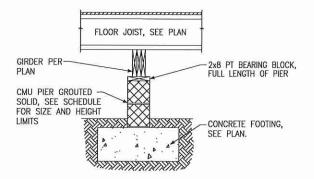

FOUNDATION SECTION
INTERIOR PIER

(K) CRAWL SPACE VENT DETAIL



ENGINEERING
UITE 201, QUAKERTOWN, PA 18951



Detai Foundation

Up to North Project #: 105-19000

工

∑ ...

130

arolina

O

Designed By: KRK Checked By: Issue Date: 1/1/19

Re-Issue:

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

SD-9