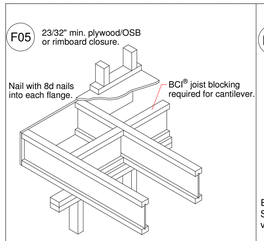

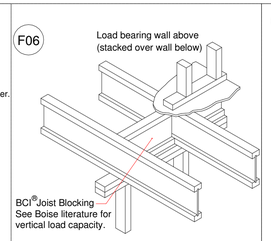

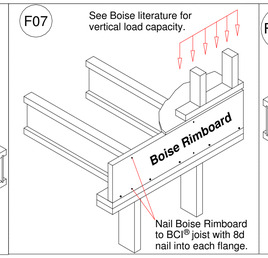

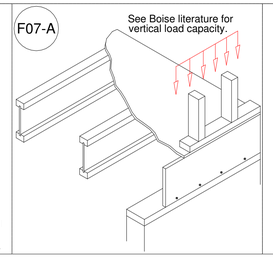

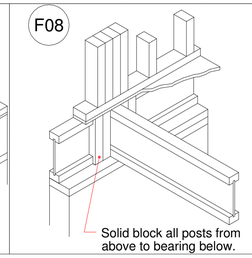

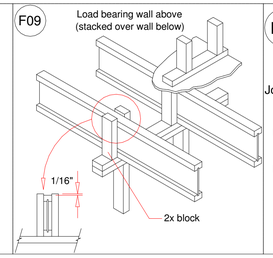

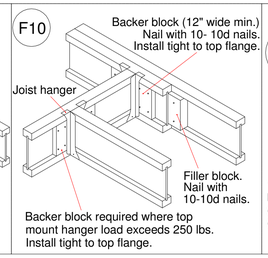

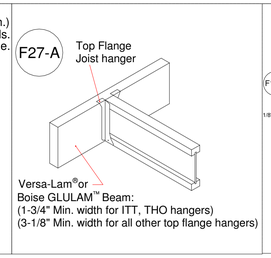

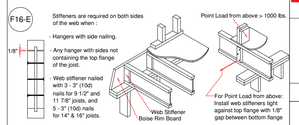

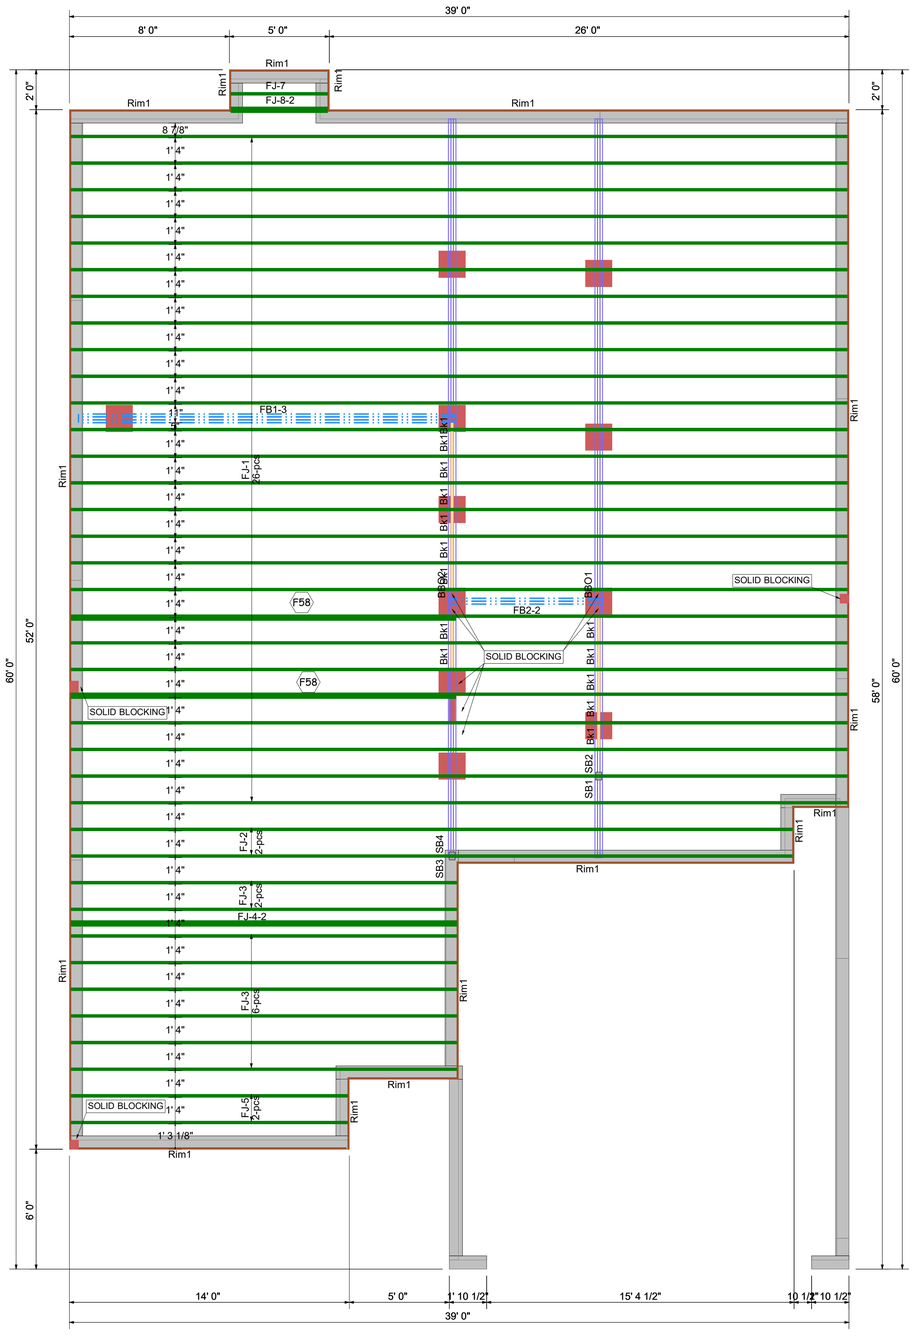

Products

PlotID	Length	Product	Plies	Net Qty
FJ-1	38' 10"	14" BCI® 4500s-1.8	1	26
FJ-2	36' 1"	14" BCI® 4500s-1.8	1	2
FJ-3	19' 3 1/2"	14" BCI® 4500s-1.8	1	8
FJ-4-2	19' 3 1/2"	14" BCI® 4500s-1.8	2	2
FJ-5	19' 3 1/4"	14" BCI® 4500s-1.8	1	2
FJ-6	13' 10"	14" BCI® 4500s-1.8	1	2
FJ-7	4' 10"	14" BCI® 4500s-1.8	1	1
FJ-8-2	4' 10"	14" BCI® 4500s-1.8	2	2
FB1-3	20' 0"	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	3	3
FB2-2	8' 0"	1-3/4" x 14" VERSA-LAM® 2.0 3100 SP	2	2
Rim1	12' 0"	1" x 14" BC RIM BOARD OSB	1	16
Bk1	16' 0"	14" BCI® 4500s-1.8	1	1

TRILLIUM
SEAL DATE 02/07/19
ELEVATION A
CRAWL EWP PLACEMENT PLAN

Builders FirstSource

Boise Cascade
www.bldr.com

1135 ROBESON STREET
FAYETTEVILLE, NC 28305
V (910) 485-1111

7601 BOEING DRIVE
GREENSBORO, NC 27409
V (336) 884-5454

3189 NC HIGHWAY5
ABERDEEN NC 28315
V (910) 944-2516

This layout and associated materials list has been prepared based on project plans and/or information provided to Builders FirstSource (BFS). It remains the responsibility of the builder, architect, designer, or other responsible persons to review this information to assure that it is appropriate, accurate, complete and complies with applicable building codes.

GENERAL NOTES:

1.) READ THE INSTALLATION GUIDE BEFORE FRAMING.
2.) ALL WALLS SHOWN ARE LOAD BEARING UNLESS NOTED OTHERWISE. WALLS NOT SHOWN ARE CONSIDERED NON-LOAD BEARING.
3.) UNLESS STATED OTHERWISE ALL CEILING & ROOF LOADS BRACE DIRECTLY TO LOAD BEARING WALLS SUPPORTED BY FOUNDATION.
4.) CONTACT BUILDERS FIRSTSOURCE BEFORE MAKING ANY ALTERATIONS OR ADJUSTMENTS...FAILURE TO DO SO MAY RESULT IN COSTLY REPAIRS.

H&H Homes
Trillium A R
CRAWL EWP PLACEMENT PLAN
Builders FirstSource, Central Carolina Markets
DRAWN BY:
DATE: 4/26/2019
SCALE: NTS
JOB NUMBER:

MINIMUM DESIGN DATA
LIVE LOAD 40 PSF
DEAD LOAD 10 PSF
TOTAL LOAD 50 PSF
DOL = 100%
DEFLECTION CRITERIA
L/480 (MINIMUM)

ARCHITECTUAL PLAN DATE
XX-XX-XX

REVISED ARCH. PLAN DATE
XX-XX-XX

XXXXXXX

Sheet
1 of 1