




Client:
Project:
Address:

Date: 8/12/2025
Input by: MATT B
Job Name: ALAN MEZA
Project #: 24-6852

Page 1 of 1

BBO 2.1E RigidLam LVL DF or SP 1.750" X 14.000" 2-Ply - PASSED

Level: Level

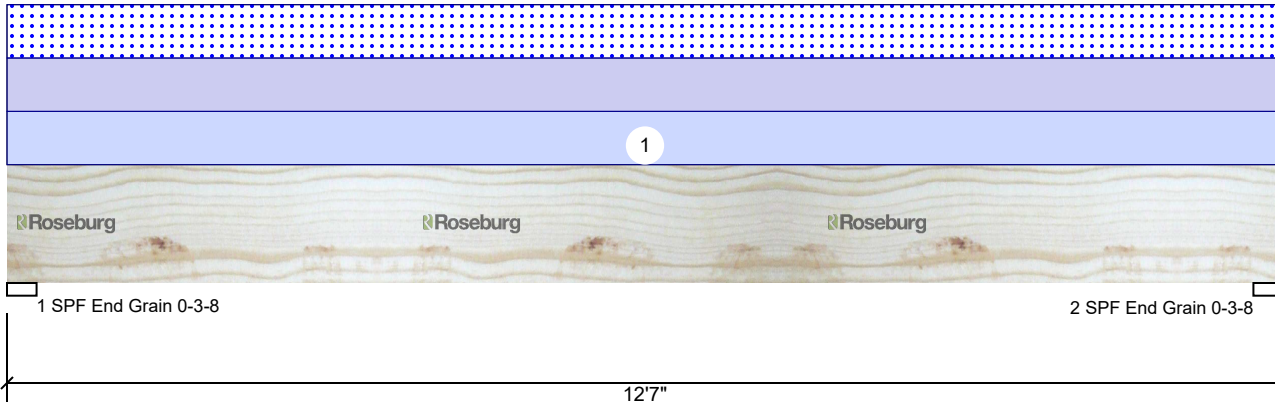

Member Information

Type:	Girder	Application:	Floor
Plies:	2	Design Method:	ASD
Moisture Condition:	Dry	Building Code:	IRC 2021
Deflection LL:	480	Load Sharing:	No
Deflection TL:	240	Deck:	Not Checked
Importance:	Normal - II		
Temperature:	Temp <= 100°F		

Reactions UNPATTERNED lb (Uplift)

Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	0	3487	3398	0	3398
2	Vertical	0	3487	3398	0	3398

Bearings

Bearing	Length	Dir.	Cap.	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	Vert	75%	3487 / 3398	6885	L	D+S
2 - SPF End Grain	3.500"	Vert	75%	3487 / 3398	6885	L	D+S

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	20110 ft-lb	6'3 1/2"	32935 ft-lb	61%	D+S	L
Unbraced	20110 ft-lb	6'3 1/2"	20139 ft-lb	100%	D+S	L
Shear	5289 lb	1'5 1/2"	10894 lb	49%	D+S	L
LL Defl inch	0.178 (L/815)	6'3 1/2"	0.303 (L/480)	59%	C	L
TL Defl inch	0.362 (L/402)	6'3 1/2"	0.606 (L/240)	60%	D+C	L

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings.
- 2 Girders are designed to be supported on bottom edge only and across their full width.
- 3 Multiple plies must be fastened together as per manufacturer's details.
- 4 Top loads must be supported equally by all plies.
- 5 Top must be laterally braced at a maximum of 4'11 3/8" o.c.
- 6 Bottom must be laterally braced at end bearings.
- 7 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Top	540 PLF	0 PLF	540 PLF	0 PLF	540 PLF	ROOF
	Self Weight				14 PLF					

Notes

Calculated Structural Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

Lumber

1. Dry service conditions, unless noted otherwise
2. LVL not to be treated with fire retardant or corrosive

chemicals

Handling & Installation

1. LVL beams must not be cut or drilled
2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
3. Damaged Beams must not be used
4. Design assumes top edge is laterally restrained
5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 2/28/2028

Manufacturer Info

Roseburg Forest Products
3661 Gateway Street
Springfield, OR 97477
(541) 679-3311
www.roseburg.com
APA: PR-L289, PR-L270, ICC-ES:
ESR-1210