Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: 81 Indigo St. (Neills Creek Road - SR 1513 SUBDIVISION South Creek ISSUED TO: TMD Residential. Site Improvements required prior to Construction Authorization Issuance: NEW 🔀 REPAIR [7] EXPANSION | Type of Structure: 64x56 sfd, 4 beds 2 baths Proposed Wastewater System Type: 25% Reduction Sys. Projected Daily Flow: 480 GPD Number of Occupants: 8 Number of bedrooms: 4 **⋈** No Basement Yes May be required based on final location and elevations of facilities ⊠ No Pump Required: Yes Five years Permit valid for: No expiration Permit conditions: Authorized State Agent:: The issuance of this permit by the Health Department on way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. PROPERTY LOCATION: 81 Indigo St. (Neills Creek Road) ISSUED TO: TMD Residential SUBDIVISION South Creek LOT # 56 Facility Type: 64x56 sfd, 4 beds 2 baths Expansion Repair Basement Fixtures? Yes Basement? Yes 25% Reduction System (Initial) Wastewater Flow: 480 **GPD** Type of Wastewater System** (See note below, if applicable) 25% Reduction System (Repair) Number of trenches 4 or 3 Installation Requirements/Conditions Exact length of each trench 75 or 100 feet Trench Spacing: 9 Feet on Center Septic Tank Size 1000 ____gallons Soil Cover: 12 inches Trenches shall be installed on contour at a Pump Tank Size Maximum Trench Depth of: 24 (Maximum soil cover shall not exceed inches 36" above the trench bottom) (Trench bottoms shall be level to +/-1/4" in all directions) __inches below pipe Pump Requirements: _____ft. TDH vs. _ inches above pipe Aggregate Depth: Conditions: Gravity to D-Box Equal Distribution NA inches total WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. **Il applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This SEE ATTACHED SITE SKETCH Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. 11/18/2020 Authorized State Agent: ____ Construction Authorization Expiration Date: AND COMIN


Harnett County Department of Public Health Site Sketch

SI INDI 60 ST.

10 Thursday Vallay Ct. (Naills Creek Road - SR 1513)

Property Location: 18 Inunder Valley Gt. (No	ellis Creek Road - SR 1513)	
Issued To: Cumberland Homes Inc.	Subdivision South Creek	Lot # -80 5 G
TWO MEDIDENTA	c_	

Authorized State Agent: Date: 11/18/2020

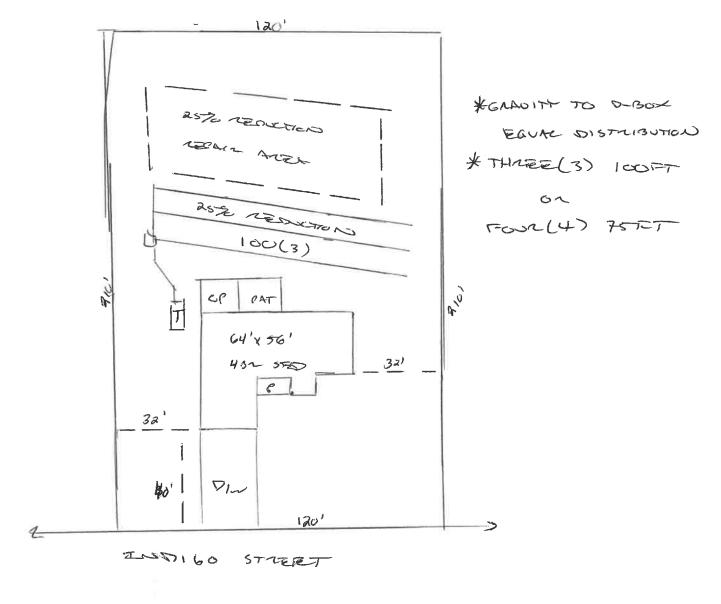

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.