
Harnett County Department of Public Health

Improvement Permit

A b	uilding permit cannot be issued with only an Improvement	Permit der Valley Ct. (Neills Creek Rd.)		
ISSUED TO: JW-Sealey and Associates		101 # 76		
NEW 🔯 REPAIR 🗍 EXPANSION	Site Improvements requ	uired prior to Construction Authorization Issuance:		
Type of Structure: 40x53 sfd, 4 beds, 3.5 Proposed Wastewater System Type: 25% Reduction	on Svs			
Projected Daily Flow: 480 GPD	211 0 4 3 .			
Number of bedrooms: 4 Number of Occupa	nts: 8max			
Basement Yes X No				
	d based on final location and elevations of facilities Well Distance from well NA feet	Permit valid for: X Five years		
Type of Water Supply: Community Public Permit conditions:	Well Distance from well NA feet	No expiration		
Permit conditions.	0			
Authorized State Agent:: The issuance of this permit by the Health Department in no way guarant site is subject to revocation if the site plan, plat, or the intended use the Laws and Rules for Sewage Treatment and Disposal and to conditions	nges. The Improvement Permit shall not be affected by a change in owner	SEE ATTACHED SITE SKETCH cking with appropriate governing bodies in meeting their requirements. This rship of the site. This permit is subject to compliance with the provisions of		
	Construction Authorization			
	(Required for Building Permit)			
The construction and installation requirements of Rules .1950, .1952, .195 with the attached system layout.	4, .1955, .1956, .1957, .1958. and .1959 are incorporated by references	into this permit and shall be met. Systems shall be installed in accordance		
ISSUED TO: JW-Sealey and Associates, Inc. PROPERTY LOCATION: 110 Thunder Valley Ct. (Neills Creek Rd				
40vE2 ofd 4 bodo 2 E b	SUBDIVISION <u>South Cree</u> Bi ☑ New ☐ Expansion ☐ Repair	ek LOT # 76		
Facility Type: 40x53 sfd, 4 beds, 3.5 ba				
Basement? Yes No Basement Fixture No Wastewater System** 25% Reduction		(Initial) Wastewater Flow: 480 GPD		
(See note below, if applicable)	on o you	(
25% Reduc	tion System(Repair)			
Installation Requirements/Conditions	Number of trenches 5			
Septic Tank Size 1000 gallons	Exact length of each trench 70 feet	Trench Spacing: 9 Feet on Center		
Pump Tank Sizegallons	Trenches shall be installed on contour at a	Soil Cover: 6–8 inches		
	Maximum Trench Depth of: 18-20 inches	(Maximum soil cover shall not exceed		
	(Trench bottoms shall be level to +/-1/4"	36" above the trench bottom)		
	in all directions)	NA inches below pipe		
Pump Requirements:ft. TDH vs	GPM	Aggregate Depth: NA inches above pipe		
Conditions: Gravity to D-Box Equal Di	stribution Required	NA inches total		
WATER LINES (INCLUDING IRRIGATION) MUST B	E 10FT. FROM ANY PART OF SEPTIC SYSTEM OR F	REPAIR AREA.		
NO UTILITIES ALLOWED IN INITIAL OR REPAIR D				
**If applicable: / understand the system type specified	is different from the type specified on the application.	. I accept the specifications of this permit.		
Owner/Legal Representative Signature:		Date:		
This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This				
Construction Authorization is subject to compliance with the provisions of	the Laws and Rules for Sewage Treatment and Disposal and to the conditi	ions of this permit. SEE ATTACHED SITE SKETCH		
Authorized State Agent:				
Construction Authorization Expiration Date: 12/21/2025				

Harnett County Department of Public Health Site Sketch

Property Location: 110 Thunder Valley Ct. (Neil	Is Creek Rd SR 1513)		
Issued To: JW-Sealey and Associates, Inc.	Subdivision South Creek		Lot # <u>76</u>
Authorized State Agent:	AND 15.2 CO1120	Date: _	12/21/2020

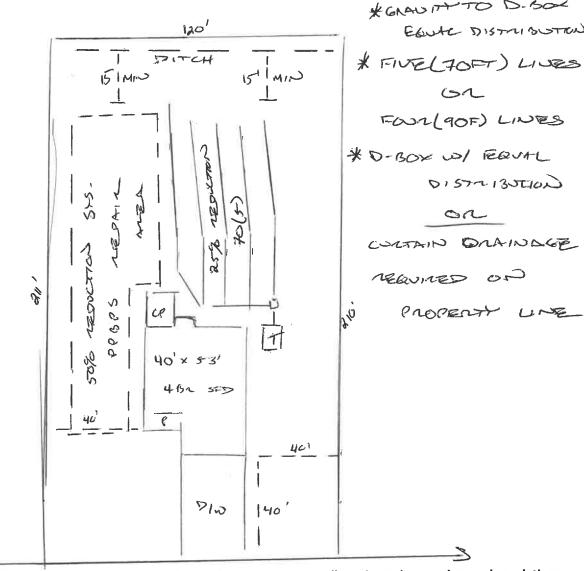

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.

THUMBER HALLEY CT.