


Highland Grove
4-Bedroom Septic Proposal
Lot #28

Windy Farm Drive

28

36,254 SQ.FT.

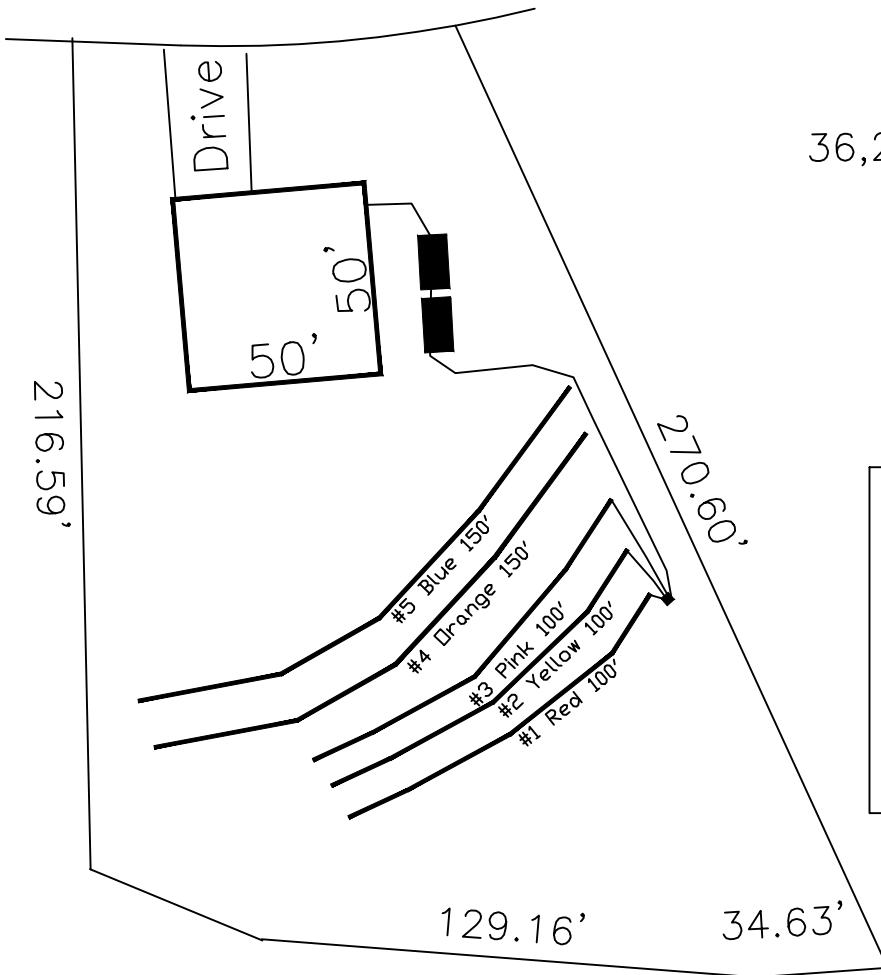

System: Pump to D-Box
Lines: 1-3 (300')
0.4 LTAR
24" Trench Bottom
Accepted Status System
Repair: Pump to D-Box
Lines: 4-7 (300')
0.4 LTAR
24 Trench Bottom
Accepted Status System

This drawing represents a preliminary septic plan made prior to final construction activities. A revised plan may need to be reworked at time of permitting.

GRAPHIC SCALE
1" = 50'



Adams
Soil Consulting
919-414-6761
Job #561