



Client: Weaver Homes Project: Magnolia Elev. B Address: Magnolia Elev. B Date: 12/24/2020 Input by: Christine Shivy Job Name: Magnolia Elev. B

Project #:

**Kerto-S LVL** 1.750" X 16.000" 3-Ply - PASSED BM<sub>1</sub>

Level: Level

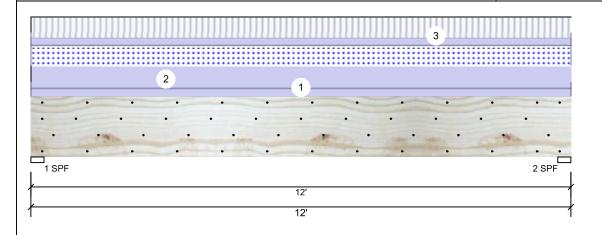



Page 1 of 1

Member	Information
Type:	Girder

Moisture Condition: Dry Deflection LL: 480 Deflection TL: 360 Importance: Temperature: Temp <= 100°F

Normal

Application: Design Method: ASD **Building Code: IBC/IRC 2015** Load Sharing: Yes Deck: Not Checked

Reactions UNPATTERNED Ib (Uplift) Brg Wind Const Live Dead Snow 1932 3454 1950 0 0 1 0 2 1932 3454 1950 0

# **Bearings**

Bearing Length Cap. React D/L lb Total Ld. Case Ld. Comb. 1-SPF 3.500" D+0.75(L+S) 3454 / 2912 6366 L 2-SPF 3.500" 82% 3454 / 2912 6366 L D+0.75(L+S)

### **Analysis Results**

•						
Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	17729 ft- <b>l</b> b	6'	62010 ft-lb	0.286 (29%)	D+0.75(L+S)	L
Unbraced	17729 ft-lb	6'	17732 ft-lb	1.000 (100%)	D+0.75(L+S)	L
Shear	4565 lb	1'6 5/8"	17920 lb	0.255 (25%)	D+L	L
LL Defl inch	0.066 (L/2116)	6'	0.289 (L/480)	0.230 (23%)	0.75(L+S)	L
TL Defl inch	0.143 (L/968)	6'	0.385 (L/360)	0.370 (37%)	D+0.75(L+S)	L

### **Design Notes**

- 1 Fasten all plies using 4 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 2 Refer to last page of calculations for fasteners required for specified loads.
- 3 Girders are designed to be supported on the bottom edge only.
- 4 Top loads must be supported equally by all plies.
- 5 Top must be laterally braced at a maximum of 10'4 1/8" o.c.
- 6 Bottom braced at bearings.
- 7 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments	
1	Uniform			Тор	125 PLF	0 PLF	0 PLF	0 PLF	0 PLF	Exterior Wall	
2	Uniform			Тор	325 PLF	0 PLF	325 PLF	0 PLF	0 PLF	A2	
3	Uniform			Far Face	107 PLF	322 PLF	0 PLF	0 PLF	0 PLF	F1	
	Self Weight				19 PLF						

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive

#### Handling & Installation

- LVL beams must not be cut or drilled
   Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- approvais
  Damaged Beams must not be used
  Design assumes top edge is laterally restrained
  Provide lateral support at bearing points to avoid
  lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 1/8/2023

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850

www.metsawood.com/us ICC-ES: ESR-3633

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS








Client: Project: Address: Weaver Homes Magnolia Elev. B Magnolia Elev. B Date: 12/24/2020


Input by: Christine Shivy Job Name: Magnolia Elev. B

Project #:

2-Ply - PASSED **Kerto-S LVL** 1.750" X 16.000" BM<sub>2</sub>

Level: Level

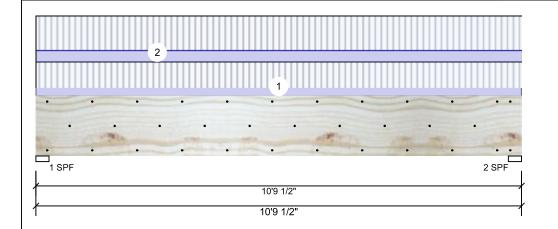



Page 1 of 1

### Member Information

Type: Plies: 2 Moisture Condition: Dry Deflection LL: 480 Deflection TL: 360 Importance: Normal Temperature: Temp <= 100°F

Application: Design Method: ASD **Building Code: IBC/IRC 2015** Load Sharing: No Deck: Not Checked

Reactions UNPATTERNED Ib (Uplift) Brg Snow Wind Const Live Dead 3389 1200 0 0 0 1 3389 1200 0 0 0 2

## **Bearings**

Bearing Length Cap. React D/L lb Total Ld. Case Ld. Comb. 1-SPF 3.500" 1200 / 3389 4589 D+L 2-SPF 3.500" 88% 1200 / 3389 4589 I D+I

#### Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	11397 ft-lb	5'4 3/4"	34565 ft-lb	0.330 (33%)	D+L	L
Unbraced	11397 ft-lb	5'4 3/4"	11746 ft-lb	0.970 (97%)	D+L	L
Shear	4386 lb	1'6 5/8"	11947 <b>l</b> b	0.367 (37%)	D+L	L
LL Defl inch	0.085 (L/1457)	5'4 3/4"	0.259 (L/480)	0.330 (33%)	L	L
TL Defl inch	0.115 (L/1076)	5'4 3/4"	0.345 (L/360)	0.330 (33%)	D+L	L

### **Design Notes**

- 1 Fasten all plies using 3 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 2 Refer to last page of calculations for fasteners required for specified loads.
- 3 Girders are designed to be supported on the bottom edge only.
- 4 Top braced at bearings.
- 5 Bottom braced at bearings.
- 6 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Far Face	89 PLF	267 PLF	0 PLF	0 PLF	0 PLF	F4
2	Uniform			Near Face	121 PLF	361 PLF	0 PLF	0 PLF	0 PLF	F2
	Self Weight				12 PLF					

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- Handling & Installation

  1. UVL beams must not be cut or drilled

  2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

  3. Damaged Beams must not be used

  4. Design assumes top edge is laterally restrained

  5. Provide lateral support at bearing points to avoid lateral displacement and rotation
- 6. For flat roofs provide proper drainage to prevent ponding

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us ICC-ES: ESR-3633

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



This design is valid until 1/8/2023




Client: Project: Address: Weaver Homes Magnolia Elev. B Magnolia Elev. B Date: 12/24/2020


Input by: Christine Shivy Job Name: Magnolia Elev. B

Project #:

Dining W. Hdr. **Kerto-S LVL** 1.750" X 9.250" 2-Ply - PASSED

Level: Level

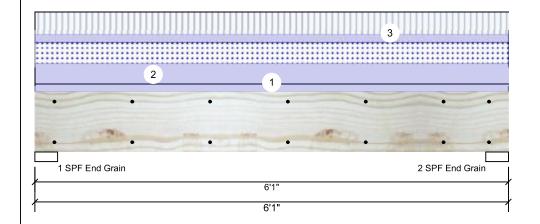



D+0.75(L+S)

Page 1 of 1

|--|

Girder Type: Plies: 2 Moisture Condition: Dry Deflection LL: 480 Deflection TL: 360 Importance: Normal Temperature:

Temp <= 100°F

Application: Design Method: ASD **Building Code: IBC/IRC 2015** Load Sharing: No Deck: Not Checked

### Reactions UNPATTERNED Ib (Uplift)

Brg	Live	Dead	Snow	Wind	Const
1	1098	1756	989	0	0
2	1098	1756	989	0	0

## **Bearings**

Bearing Length Cap. React D/L lb Total Ld. Case Ld. Comb. 1-SPF 3.500" 1756 / 1565 3321 L D+0.75(L+S) End Grain

3321 L

1756 / 1565

2-SPF 3.500" End Grain

## **Analysis Results**

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	4318 ft-lb	3' 1/2"	14423 ft-Ib	0.299 (30%)	D+0.75(L+S)	L
Unbraced	4318 ft-lb	3' 1/2"	10944 ft-lb	0.395 (39%)	D+0.75(L+S)	L
Shear	2229 lb	5'1"	7943 lb	0.281 (28%)	D+0.75(L+S)	L
LL Defl inch	0.032 (L/2087)	3' 1/2"	0.141 (L/480)	0.230 (23%)	0.75(L+S)	L
TL Defl inch	0.069 (L/984)	3' 1/2"	0.188 (L/360)	0.370 (37%)	D+0.75(L+S)	L

### **Design Notes**

- 1 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 2 Refer to last page of calculations for fasteners required for specified loads.
- 3 Girders are designed to be supported on the bottom edge only.
- 4 Top loads must be supported equally by all plies.
- 5 Top braced at bearings.
- 6 Bottom braced at bearings.
- 7 Lateral slenderness ratio based on single ply width.

1	
1	
1	
ł	

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Тор	125 PLF	0 PLF	0 PLF	0 PLF	0 PLF	Wall Load
2	Uniform			Тор	325 PLF	0 PLF	325 PLF	0 PLF	0 PLF	A1
3	Uniform			Тор	120 PLF	361 PLF	0 PLF	0 PLF	0 PLF	F2
	Self Weight				7 PLF					

#### Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive
- Handling & Installation

  1. UVL beams must not be cut or drilled

  2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

  3. Damaged Beams must not be used

  4. Design assumes top edge is laterally restrained

  5. Provide lateral support at bearing points to avoid lateral displacement and rotation

Handling & Installation

6. For flat roofs provide proper drainage to prevent ponding

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us ICC-ES: ESR-3633

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



This design is valid until 1/8/2023



Client: Project: Address:


Weaver Homes Magnolia Elev. B Magnolia Elev. B Date: 12/24/2020


Christine Shivy Input by: Job Name: Magnolia Elev. B

Project #:

2-Ply - PASSED **Kerto-S LVL** 1.750" X 11.875" **GDH** 

Level: Level

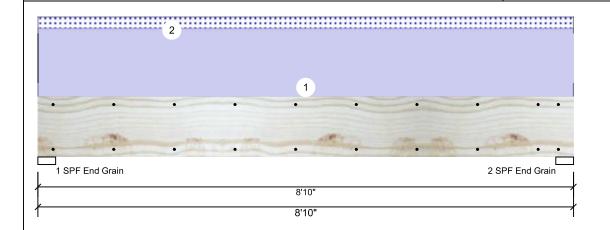



Page 1 of 1

Member Inform	ation
Type:	Girder
Plies:	2
Moisture Condition:	Dry
Deflection LL:	480
Deflection TL:	360
Importance:	Normal
Temperature:	Temp <= 100°F

Application: Design Method: ASD **Building Code: IBC/IRC 2015** Load Sharing: No Deck: Not Checked

Reactions UNPATTERNED Ib (Uplift) Brg Live Wind Dead Snow Const 0 1101 0 0 177 1 2 0 1101 177 0 n

#### Analysis Results Analysis Case Actual Location Allowed Comb. Capacity Moment 2185 ft-lb 4'5" 17919 ft-lb 0.122 (12%) D Uniform Unbraced 2536 ft-lb 4'5" 10756 ft-Ib 0.236 (24%) D+S 797 lb 0.100 (10%) D 7'7 3/8" 7980 lb Uniform Shear 0.006 4'5 1/16" 0.209 (L/480) 0.030 (3%) S LL Defl inch (L/18257) TL Defl inch 0.040 (L/2525) 4'5 1/16" 0.279 (L/360) 0.140 (14%) D+S

### **Bearings**

Bearing	Length	Cap. R	eact D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	12%	1101 / 177	1277	L	D+S
2 - SPF End Grain	3.500"	12%	1101 / 177	1277	L	D+S

## **Design Notes**

- 1 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 2 Refer to last page of calculations for fasteners required for specified loads.
- 3 Girders are designed to be supported on the bottom edge only.
- 4 Top loads must be supported equally by all plies.
- 5 Top braced at bearings.
- 6 Bottom braced at bearings.
- 7 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Тор	200 PLF	0 PLF	0 PLF	0 PLF	0 PLF	Exterior Loads
2	Uniform			Тор	40 PLF	0 PLF	40 PLF	0 PLF	0 PLF	2'-0" Gable End
	Self Weight				9 PLF					

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown, It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
   LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- LVL beams must not be cut or drilled
   Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals
- approvais
  Damaged Beams must not be used
  Design assumes top edge is laterally restrained
  Provide lateral support at bearing points to avoid
  lateral displacement and rotation
- - This design is valid until 1/8/2023

Manufacturer Info 6. For flat roofs provide proper drainage to prevent ponding Metsä Wood

301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us ICC-ES: ESR-3633

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



