

# Mark Morris, P.E.

#126, 1317-M, Summerville, SC 29483

843 209-5784, Fax (866)-213-4614

The truss drawing(s) listed below have been prepared by **Atlantic Building Components** under my direct supervision based on the parameters provided by the truss designers.

AST #: 50804

JOB: 24-5444-F02

JOB NAME: LOT 0.0108 BLAKE POND

Wind Code: N/A

Wind Speed: Vult= N/A

Exposure Category: N/A

Mean Roof Height (feet): N/A

These truss designs comply with IRC 2015 as well as IRC 2018.

*23 Truss Design(s)*

Trusses:

F2-01, F2-02, F2-03, F2-04, F2-05, F2-06, F2-07, F2-08, F2-10, F2-12, F2-14, F2-15, F2-16, F2-17, F2-18, F2-19, F2-20, F2-21, F2-22, F2-23, F2-24, F2-25, F2-26



**7/24/2024**

**Mark Morris**

***Warning !—Verify design parameters and read notes before use.***

This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSL/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI

Job 24-5444-F02	Truss F2-01	Truss Type Floor Supported Gable	Qty 1	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 50804
--------------------	----------------	-------------------------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:24 2024 Page 1  
ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-k3hEGZ9iK1?ERZyz?72\_eSuoY5Rhm03MB0wJ47yuaZb

0-1-8

Scale = 1:11.0

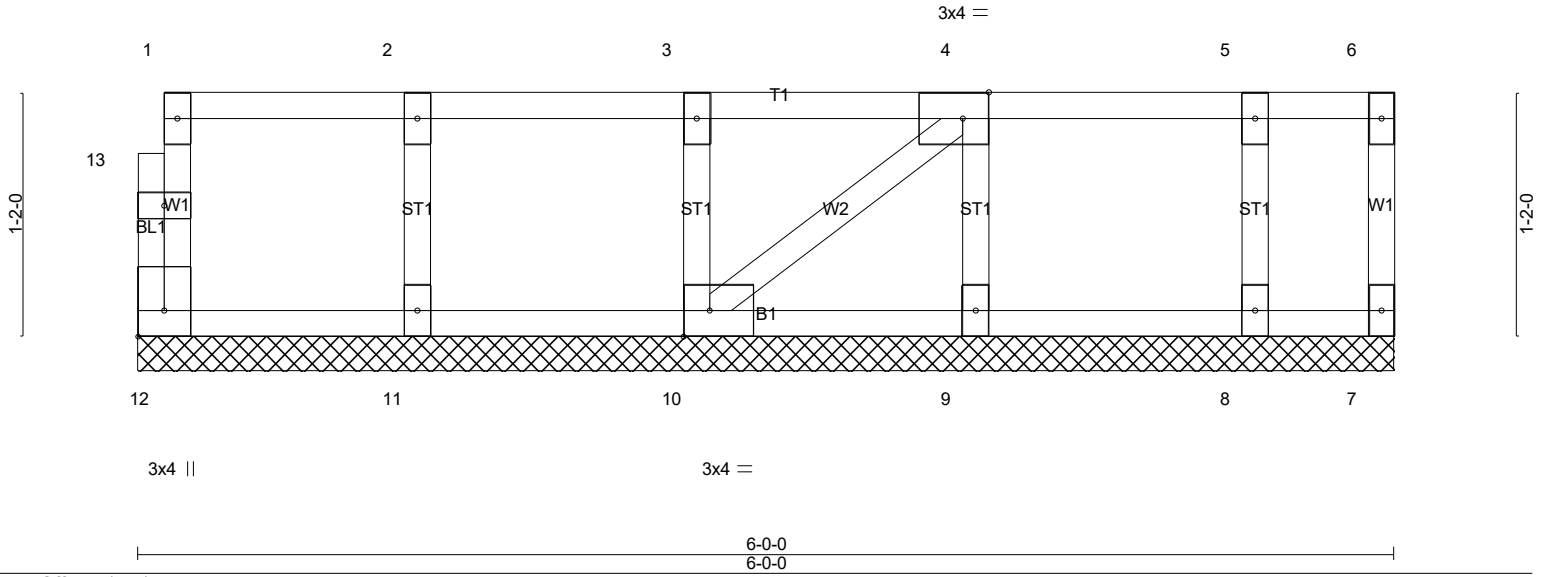


Plate Offsets (X,Y)-- [4:0-1-8,Edge], [10:0-1-8,Edge], [12:Edge,0-1-8]		6-0-0		6-0-0		6-0-0		6-0-0	
<b>LOADING</b> (psf)	<b>SPACING-</b>	2-0-0	<b>CSI.</b>	<b>DEFL.</b>	in (loc)	l/defl	L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL 1.00	TC 0.06	Vert(LL) n/a	-	n/a	999	MT20	244/190	
TCDL 10.0	Lumber DOL 1.00	BC 0.01	Vert(CT) n/a	-	n/a	999			
BCLL 0.0	Rep Stress Incr YES	WB 0.03	Horz(CT) 0.00	7	n/a	n/a			
BCDL 5.0	Code IRC2021/TPI2014	Matrix-P							
									Weight: 29 lb FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)  
OTHERS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS.** All bearings 6-0-0.  
(lb) - Max Grav All reactions 250 lb or less at joint(s) 12, 7, 11, 10, 9, 8

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (7)
- 1) All plates are 1.5x3 MT20 unless otherwise indicated.
  - 2) Gable requires continuous bottom chord bearing.
  - 3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - 4) Gable studs spaced at 1-4-0 oc.
  - 5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
  - 6) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard



7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-02	Truss Type Floor Girder	Qty 1	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	----------------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:25 2024 Page 1  
ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-CFFdUvAK5K752jX9ZraDagQrjVnuVTIWQggtdayuaZa

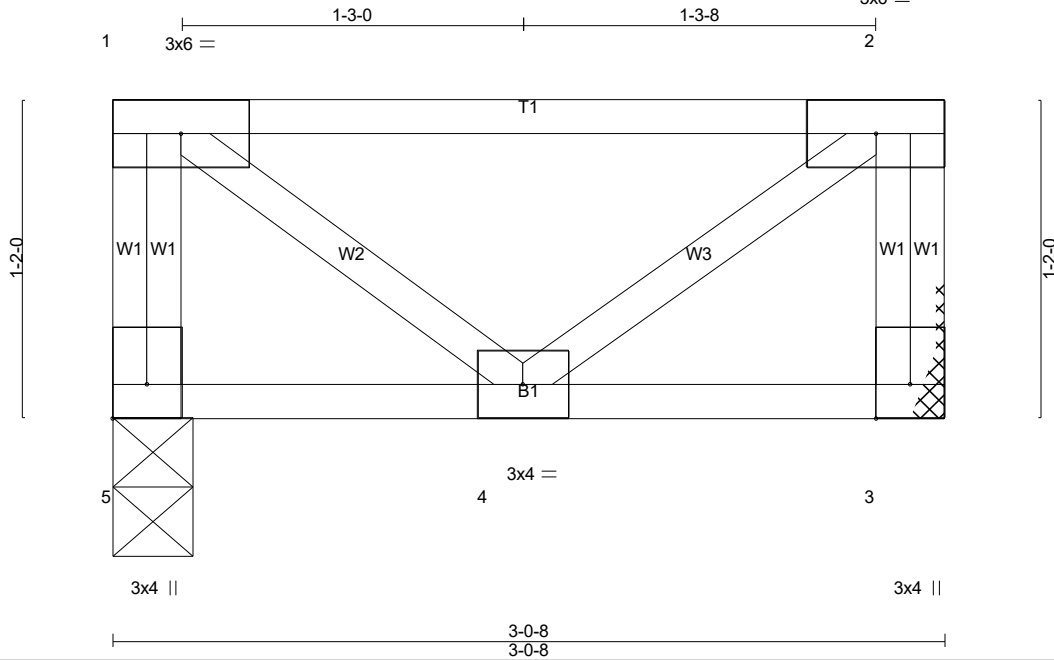


Plate Offsets (X,Y)-- [5:Edge,0-1-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.54	Vert(LL)	-0.00	4	>999	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.01	Vert(CT)	-0.00	4	>999		
BCLL 0.0	Lumber DOL 1.00	WB 0.01	Horz(CT)	0.00	3	n/a		
BCDL 5.0	Rep Stress Incr NO	Matrix-P						
	Code IRC2021/TPI2014						Weight: 19 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 3-0-8 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


**REACTIONS.** (lb/size) 5=154/0-3-8 (min. 0-1-8), 3=154/Mechanical

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

**NOTES-** (3)

- Refer to girder(s) for truss to truss connections.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

**LOAD CASE(S)** Standard



7/24/2024


**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC
24-5444-F02	F2-03	Floor Supported Gable	1	1	Job Reference (optional) # 50804

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:26 2024 Page 1  
 ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-gRo?hFBzrefYfgt6M7Y5Sjtz82v69EwZfKPKQ90yuaZZ

0<sub>1</sub>-8

Scale = 1:25.2

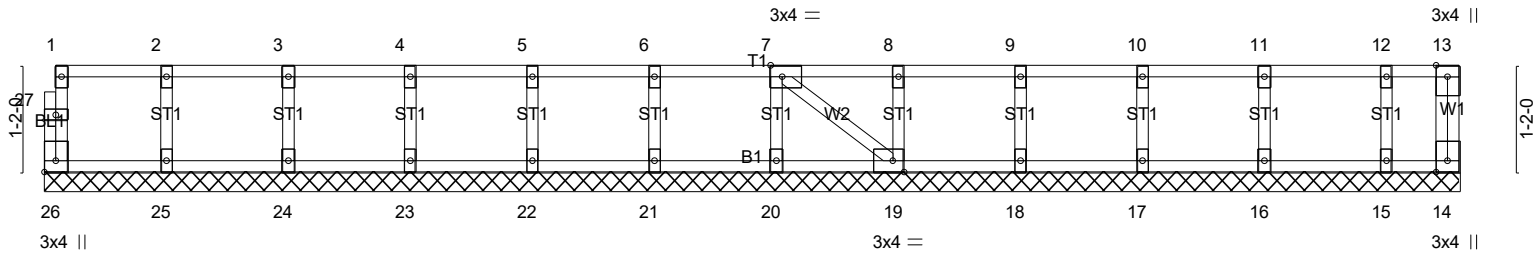

15-5-8  
15-5-8

Plate Offsets (X,Y)-- [7:0-1-8,Edge], [19:0-1-8,Edge], [26:Edge,0-1-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.06	Vert(LL)	n/a	-	n/a	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	14	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH					Weight: 68 lb	FT = 20%F, 11%E

**LUMBER-**  
 TOP CHORD 2x4 SP No.1(flat)  
 BOT CHORD 2x4 SP No.1(flat)  
 WEBS 2x4 SP No.3(flat)  
 OTHERS 2x4 SP No.3(flat)

**BRACING-**  
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS.** All bearings 15-5-8.  
 (lb) - Max Grav All reactions 250 lb or less at joint(s) 26, 14, 25, 24, 23, 22, 21, 20, 19, 18, 17, 16, 15

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (7)
- All plates are 1.5x3 MT20 unless otherwise indicated.
  - Gable requires continuous bottom chord bearing.
  - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - Gable studs spaced at 1-4-0 oc.
  - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
  - CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard





7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-04	Truss Type Floor	Qty 1	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:27 2024 Page 1  
ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-8eMNvbCbcyNpl0hYgGchG5WEfJJEzGAPu\_9\_hSyuaZY

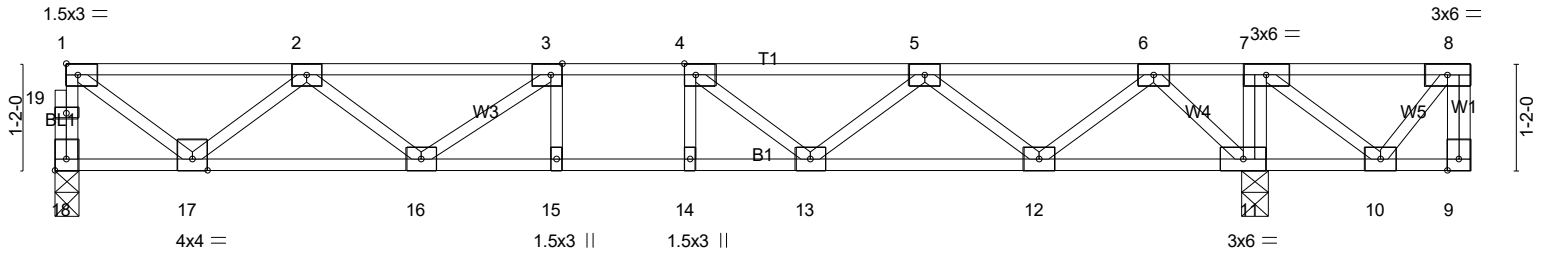

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.32	Vert(LL) -0.10	14	>999	480	MT20	244/190
TCDL 10.0	1.00	BC 0.59	Vert(CT) -0.13	14	>999	360		
BCLL 0.0	Rep Stress Incr YES	WB 0.46	Horz(CT) 0.03	11	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH					Weight: 81 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 11-12,10-11.

**REACTIONS.** (lb/size) 18=687/0-3-0 (min. 0-1-8), 11=980/0-3-8 (min. 0-1-8)  
Max Grav 18=702(LC 3), 11=980(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 18-19=-698/0, 1-19=-697/0, 1-2=-793/0, 2-3=-1805/0, 3-4=-2177/0, 4-5=-1999/0, 5-6=-1231/0  
BOT CHORD 16-17=0/1480, 15-16=0/2177, 14-15=0/2177, 13-14=0/2177, 12-13=0/1783, 11-12=-52/655  
WEBS 7-11=-303/0, 1-17=0/959, 2-17=-895/0, 2-16=0/424, 3-16=-533/0, 4-13=-425/7, 5-13=0/365, 5-12=-744/0, 6-12=0/777, 6-11=-975/0

- NOTES-** (5)
- 1) Unbalanced floor live loads have been considered for this design.
  - 2) All plates are 3x4 MT20 unless otherwise indicated.
  - 3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
  - 4) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard



7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-05	Truss Type Floor Girder	Qty 1	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	----------------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:27 2024 Page 1  
ID:oDuWOOmHxMOj2fwcp2aKqzMG6w-8eMNVbCbcyNpI0hYgGchG5WEhJRkzLfp\_u\_9\_hSyuaZY



Scale = 1:11.8

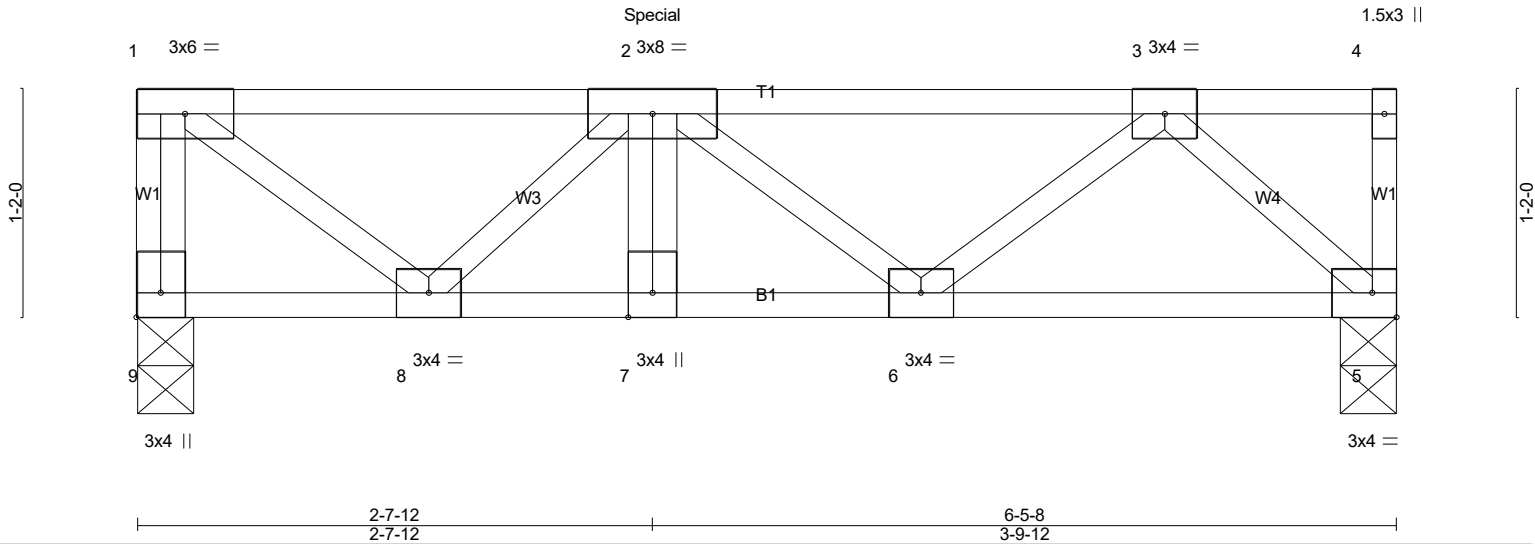


Plate Offsets (X,Y)-- [9:Edge,0-1-8]

<b>LOADING</b> (psf)	<b>SPACING-</b>	2-0-0	<b>CSI.</b>	<b>DEFL.</b>	in	(loc)	l/defl	L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL	1.00	TC 0.32	Vert(LL)	-0.01	7	>999	480	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.11	Vert(CT)	-0.01	7	>999	360		
BCLL 0.0	Rep Stress Incr	NO	WB 0.17	Horz(CT)	0.00	5	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-P						Weight: 37 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

**REACTIONS.** (lb/size) 9=319/0-3-8 (min. 0-1-8), 5=328/0-3-8 (min. 0-1-8)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-9=-313/0, 1-2=-283/33, 2-3=-422/0  
BOT CHORD 7-8=-76/502, 6-7=-76/502, 5-6=0/318  
WEBS 1-8=-41/356, 2-8=-295/58, 3-5=-434/0

**NOTES-** (6)

- Unbalanced floor live loads have been considered for this design.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 447 lb up at 2-7-12 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

**LOAD CASE(S)** Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00  
Uniform Loads (plf)  
Vert: 5-9=-10, 1-4=-100  
Concentrated Loads (lb)  
Vert: 2=43(F)




7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-06	Truss Type Floor	Qty 1	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 50804
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:28 2024 Page 1  
ID:oDuWOOMhLxMOj2fwcp2aKqzMG6w-dqwI6xCDFVgVAGkEz7wol2O?igdikly6euXDvryaZX

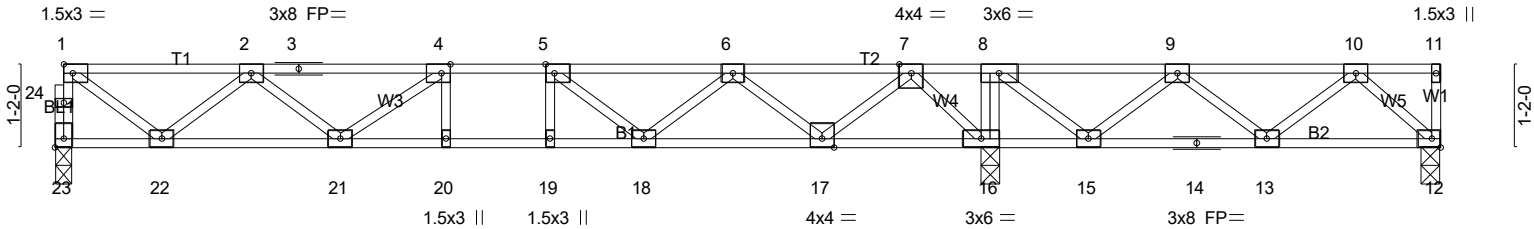

1-6-0	4-0-0	5-6-8	6-2-8	6-10-8	8-3-0	10-9-0	12-11-12	13-1-4	14-5-12	16-11-12	19-3-8	19-5-0
1-6-0	2-6-0	1-6-8	0-8-0	0-8-0	1-4-8	2-6-0	2-2-12	0-1-8	1-4-8	2-6-0	2-3-12	0-1-8
Plate Offsets (X,Y)-- [4:0-1-8,Edge], [5:0-1-8,Edge], [23:Edge,0-1-8]												

<b>LOADING</b> (psf)	<b>SPACING-</b>	2-0-0	<b>CSI.</b>	<b>DEFL.</b>	in	(loc)	l/defl	L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL	1.00	TC 0.41	Vert(LL)	-0.07	20	>999	480	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.52	Vert(CT)	-0.10	20	>999	360		
BCLL 0.0	Rep Stress Incr	YES	WB 0.43	Horz(CT)	0.02	16	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						Weight: 99 lb	FT = 20%F, 11%E

<b>LUMBER-</b>	<b>BRACING-</b>
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

**REACTIONS.** (lb/size) 23=595/0-3-0 (min. 0-1-8), 12=111/0-3-8 (min. 0-1-8), 16=1403/0-3-8 (min. 0-1-8)  
Max Uplift 12=-123(LC 3)  
Max Grav 23=603(LC 3), 12=264(LC 4), 16=1403(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 23-24=-597/0, 1-24=-596/0, 1-2=-664/0, 2-3=-1438/0, 3-4=-1438/0, 4-5=-1604/0, 5-6=-1234/0, 7-8=0/1341, 8-9=0/919, 9-10=-282/360  
BOT CHORD 21-22=0/1242, 20-21=0/1604, 19-20=0/1604, 18-19=0/1604, 17-18=0/887, 16-17=-573/0, 15-16=-1341/0, 14-15=-608/281, 13-14=-608/281  
WEBS 8-16=-631/0, 1-22=0/802, 2-22=-752/0, 2-21=0/256, 4-21=-278/0, 5-18=-514/0, 6-18=0/463, 6-17=-874/0, 7-17=0/913, 7-16=-1122/0, 8-15=0/724, 9-15=-665/0, 9-13=0/323, 10-13=-277/43, 10-12=-339/201

- NOTES-** (6)  
1) Unbalanced floor live loads have been considered for this design.  
2) All plates are 3x4 MT20 unless otherwise indicated.  
3) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 123 lb uplift at joint 12.  
4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.  
5) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard



7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-07	Truss Type Floor	Qty 1	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:29 2024 Page 1  
ID: oDuWOOmHlXMOj2fwp2aKqzMG6w-50U7JHDr8ZdWXKrwoge9LWbZn60uRB?6Lle4mLyuaZW


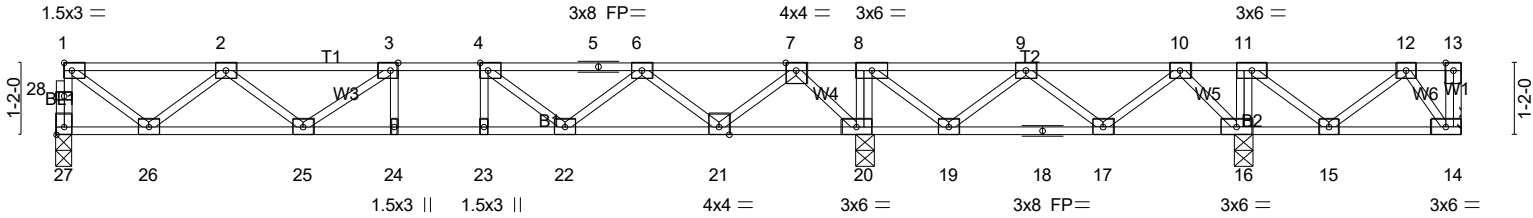



Plate Offsets (X,Y)-- [3:0-1-8,Edge], [4:0-1-8,Edge], [27:Edge,0-1-8]

<b>LOADING</b> (psf)	<b>SPACING-</b>	2-0-0	<b>CSI.</b>	<b>DEFL.</b>	in (loc)	l/defl	L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL	1.00	TC 0.41	Vert(LL)	-0.07 24-25	>999	480	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.52	Vert(CT)	-0.10 24-25	>999	360		
BCLL 0.0	Rep Stress Incr	YES	WB 0.43	Horz(CT)	0.02 20	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 119 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

**REACTIONS.** All bearings 0-3-8 except (jt=length) 27=0-3-0, 14=Mechanical.  
(lb) - Max Uplift All uplift 100 lb or less at joint(s) 14  
Max Grav All reactions 250 lb or less at joint(s) 14 except 27=602(LC 5), 20=1391(LC 3), 16=554(LC 4)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 27-28=-596/0, 1-28=-595/0, 1-2=-663/0, 2-3=-1436/0, 3-4=-1601/0, 4-5=-1229/0,  
5-6=-1229/0, 7-8=0/1335, 8-9=0/903, 9-10=-155/305  
BOT CHORD 25-26=0/1240, 24-25=0/1601, 23-24=0/1601, 22-23=0/1601, 21-22=0/882, 20-21=-564/0,  
19-20=-1335/0, 18-19=-570/203, 17-18=-570/203  
WEBS 8-20=-620/0, 11-16=-312/0, 1-26=0/801, 2-26=-751/0, 2-25=0/257, 3-25=-280/0,  
4-22=-510/0, 6-22=0/462, 6-21=-873/0, 7-21=0/912, 7-20=-1124/0, 8-19=0/707,  
9-19=-648/0, 9-17=-75/345, 10-17=-302/113, 10-16=-361/288, 12-14=-288/13

**NOTES-** (7)  
1) Unbalanced floor live loads have been considered for this design.  
2) All plates are 3x4 MT20 unless otherwise indicated.  
3) Refer to girder(s) for truss to truss connections.  
4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 14.  
5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.  
6) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard



7/24/2024

**Warning !—Verify design parameters and read notes before use.** This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.



Job 24-5444-F02	Truss F2-08	Truss Type Floor	Qty 3	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:30 2024 Page 1  
ID:oDuWOOMhLxMOj2fwcp2aKqzMG6w-ZD2WXdETvtlN9UP7MO9Oti8kAWMqAe7FayNelnyuaZV


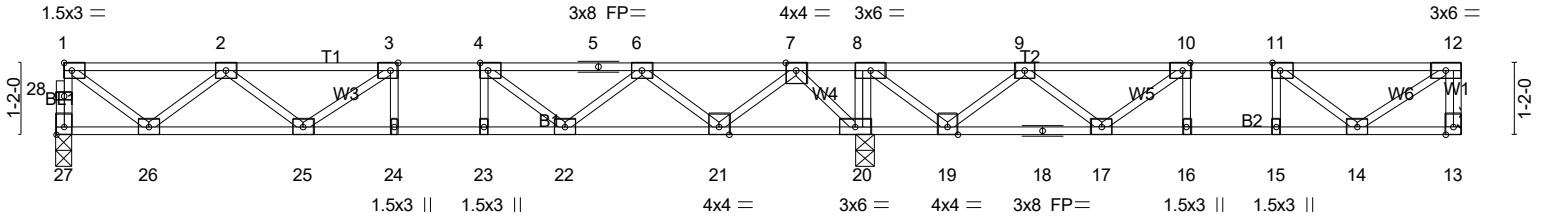



Plate Offsets (X,Y)-- [3:0-1-8,Edge], [4:0-1-8,Edge], [10:0-1-8,Edge], [11:0-1-8,Edge], [27:Edge,0-1-8]

<b>LOADING</b> (psf)	<b>SPACING-</b>	2-0-0	<b>CSI.</b>	<b>DEFL.</b> in (loc)	l/defl	L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL	1.00	TC 0.43	Vert(LL) -0.07	24	>999	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.54	Vert(CT) -0.10	24	>999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.44	Horz(CT) 0.02	20	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH					
							Weight: 116 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

**REACTIONS.** (lb/size) 27=591/0-3-0 (min. 0-1-8), 13=370/Mechanical, 20=1512/0-3-8 (min. 0-1-8)  
Max Grav 27=622(LC 10), 13=443(LC 4), 20=1512(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 27-28=-616/0, 1-28=-615/0, 12-13=-434/0, 1-2=-689/0, 2-3=-1508/0, 3-4=-1714/0,  
4-5=-1380/0, 5-6=-1380/0, 6-7=-420/281, 7-8=0/1473, 8-9=0/785, 9-10=-672/315,  
10-11=-863/85, 11-12=-474/6  
BOT CHORD 25-26=0/1287, 24-25=0/1714, 23-24=0/1714, 22-23=0/1714, 21-22=-72/1059, 20-21=-687/0,  
19-20=-1473/0, 18-19=-507/462, 17-18=-507/462, 16-17=-85/863, 15-16=-85/863,  
14-15=-85/863  
WEBS 8-20=-737/0, 1-26=0/832, 2-26=-779/0, 2-25=0/288, 3-25=-261/40, 4-22=-562/0,  
6-22=0/483, 6-21=-891/0, 7-21=0/930, 7-20=-1090/0, 8-19=0/904, 9-19=-828/0,  
9-17=0/398, 10-17=-467/0, 11-14=-496/101, 12-14=-7/570

- NOTES-** (6)  
1) Unbalanced floor live loads have been considered for this design.  
2) All plates are 3x4 MT20 unless otherwise indicated.  
3) Refer to girder(s) for truss to truss connections.  
4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.  
5) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard



7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-10	Truss Type Floor	Qty 12	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	-----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:31 2024 Page 1  
ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-1PcukyF5gAuEme\_Jv5gdQxgvLwgtv6MOob7BqDyuaZU


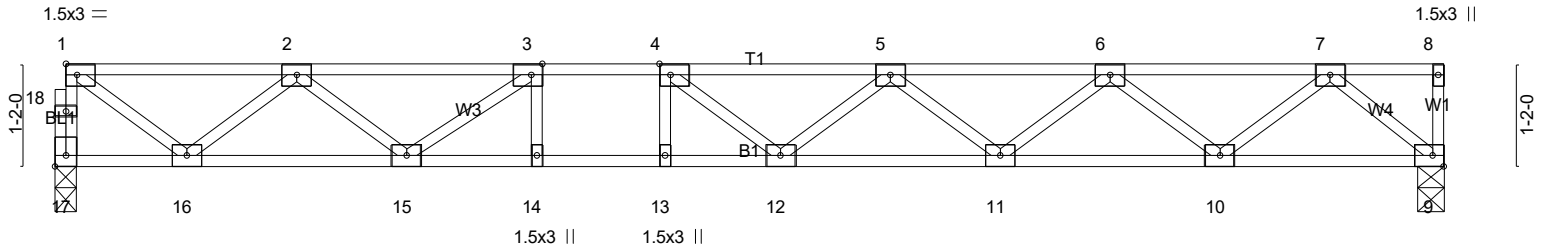


Plate Offsets (X, Y)-- [3:0-1-8,Edge], [4:0-1-8,Edge], [17:Edge,0-1-8]					
<b>LOADING</b> (psf)	<b>SPACING-</b> 1-4-0	<b>CSI.</b>	<b>DEFL.</b> in (loc) l/defl L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL 1.00	TC 0.34	Vert(LL) -0.15 12-13 >999 480	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.68	Vert(CT) -0.20 12-13 >940 360		
BCLL 0.0	Rep Stress Incr YES	WB 0.38	Horz(CT) 0.03 9 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH			Weight: 79 lb FT = 20%F, 11%E

<b>LUMBER-</b>	<b>BRACING-</b>
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

**REACTIONS.** (lb/size) 17=568/0-3-0 (min. 0-1-8), 9=572/0-3-8 (min. 0-1-8)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 17-18=-567/0, 1-18=-566/0, 1-2=-659/0, 2-3=-1574/0, 3-4=-2032/0, 4-5=-2106/0, 5-6=-1842/0, 6-7=-1123/0  
BOT CHORD 15-16=0/1228, 14-15=0/2032, 13-14=0/2032, 12-13=0/2032, 11-12=0/2093, 10-11=0/1580, 9-10=0/643  
WEBS 1-16=0/798, 2-16=-741/0, 2-15=0/451, 3-15=-586/0, 5-11=-326/0, 6-11=0/341, 6-10=-595/0, 7-10=0/625, 7-9=-842/0

- NOTES-** (5)
- 1) Unbalanced floor live loads have been considered for this design.
  - 2) All plates are 3x4 MT20 unless otherwise indicated.
  - 3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
  - 4) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard





7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-12	Truss Type Floor	Qty 2	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:31 2024 Page 1  
ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-1PcukyF5gAuEme\_Jv5gdQxgvLwgvv4pOob7BqDyuaZU

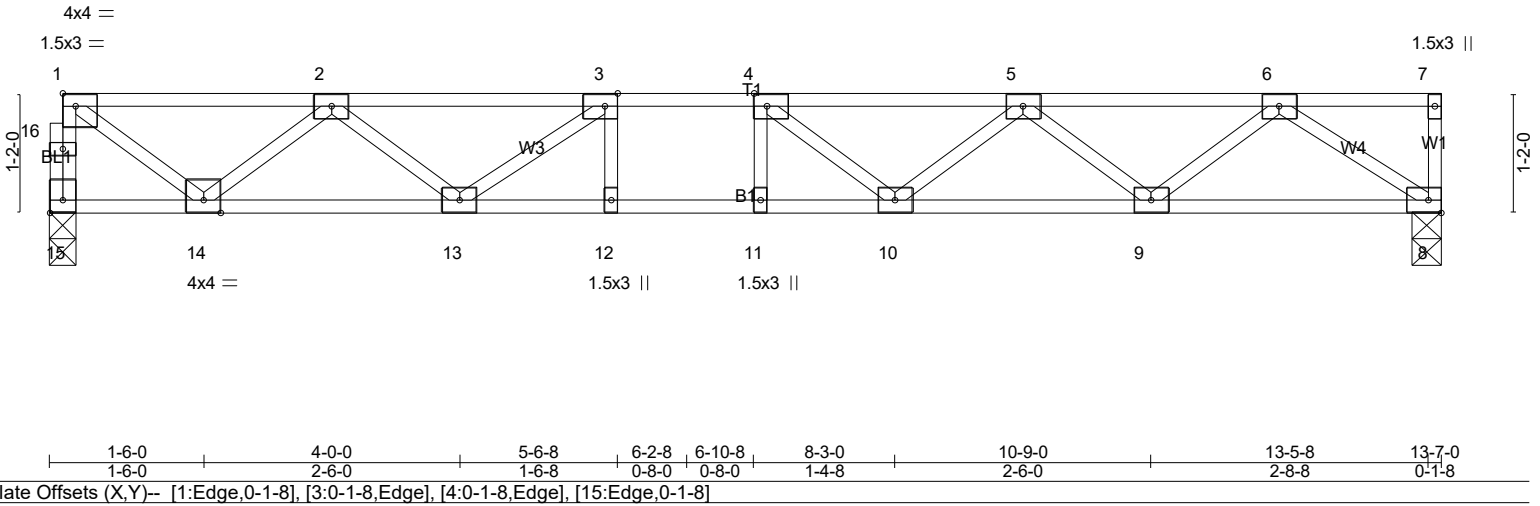

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.34	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.67	Vert(LL) -0.11 11 >999 480		
BCLL 0.0	Lumber DOL 1.00	WB 0.48	Vert(CT) -0.15 10-11 >999 360		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH	Horz(CT) 0.03 8 n/a n/a		
	Code IRC2021/TPI2014			Weight: 68 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS.** (lb/size) 15=731/0-3-0 (min. 0-1-8), 8=737/0-3-8 (min. 0-1-8)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 15-16=-727/0, 1-16=-726/0, 1-2=-830/0, 2-3=-1911/0, 3-4=-2344/0, 4-5=-2219/0, 5-6=-1527/0  
BOT CHORD 13-14=0/1549, 12-13=0/2344, 11-12=0/2344, 10-11=0/2344, 9-10=0/2043, 8-9=0/979  
WEBS 1-14=0/1004, 2-14=-936/0, 2-13=0/471, 3-13=-600/0, 4-10=-349/69, 5-10=0/309, 5-9=-672/0, 6-9=0/713, 6-8=-1186/0

**NOTES-** (5)  
1) Unbalanced floor live loads have been considered for this design.  
2) All plates are 3x4 MT20 unless otherwise indicated.  
3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.  
4) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard




7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-14	Truss Type FLOOR	Qty 8	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:31 2024 Page 1  
ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-1PcukyF5gAuEme\_Jv5gdQxgu0wiHv4WOob7BqDyuaZU



Scale = 1:26.2


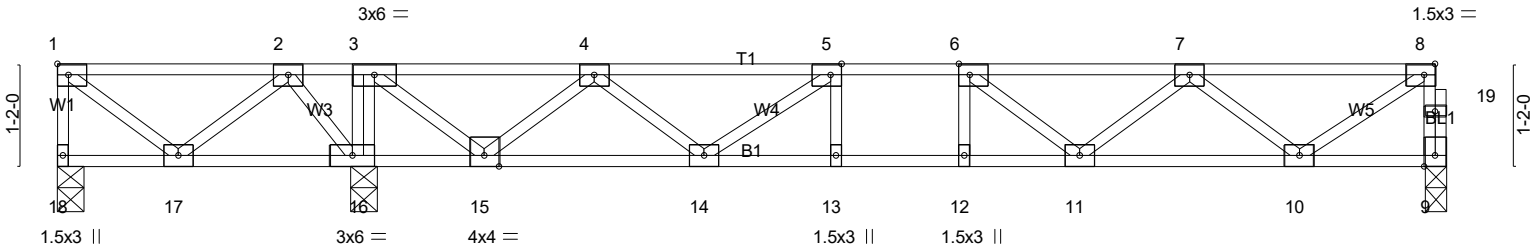


Plate Offsets (X,Y)-- [5:0-1-8,Edge], [6:0-1-8,Edge], [8:0-1-8,Edge]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.43	Vert(LL)	-0.07 11-12	>999	480	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.52	Vert(CT)	-0.09 11-12	>999	360		
BCLL 0.0	Rep Stress Incr	YES	WB 0.50	Horz(CT)	0.01 9	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 81 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 16-17,15-16.
WEBS 2x4 SP No.3(flat)	

**REACTIONS.** (lb/size) 18=-159/0-3-8 (min. 0-1-8), 9=567/0-3-0 (min. 0-1-8), 16=1302/0-3-8 (min. 0-1-8)  
Max Uplift 18=-288(LC 4)  
Max Grav 18=87(LC 3), 9=569(LC 4), 16=1302(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 1-18=-82/292, 9-19=-562/0, 8-19=-561/0, 1-2=0/396, 2-3=0/1084, 3-4=0/326, 4-5=-906/0, 5-6=-1403/0, 6-7=-1338/0, 7-8=-679/0  
BOT CHORD 16-17=-792/0, 15-16=-1084/0, 14-15=0/502, 13-14=0/1403, 12-13=0/1403, 11-12=0/1403, 10-11=0/1205  
WEBS 3-16=-806/0, 1-17=-505/0, 2-17=0/515, 2-16=-642/0, 3-15=0/1045, 4-15=-957/0, 4-14=0/529, 5-14=-609/0, 7-10=-684/0, 8-10=0/790

- NOTES-** (6)
- 1) Unbalanced floor live loads have been considered for this design.
  - 2) All plates are 3x4 MT20 unless otherwise indicated.
  - 3) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 18=288.
  - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
  - 5) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard



7/24/2024


**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-15	Truss Type Floor Supported Gable	Qty 1	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 50804
--------------------	----------------	-------------------------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:32 2024 Page 1  
ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-VbAGyIGjRU05OoZvTpCsz8D9YJ9Zee2Y1FskMgyuaZT

0<sub>1</sub>1<sub>8</sub>

Scale = 1:25.0

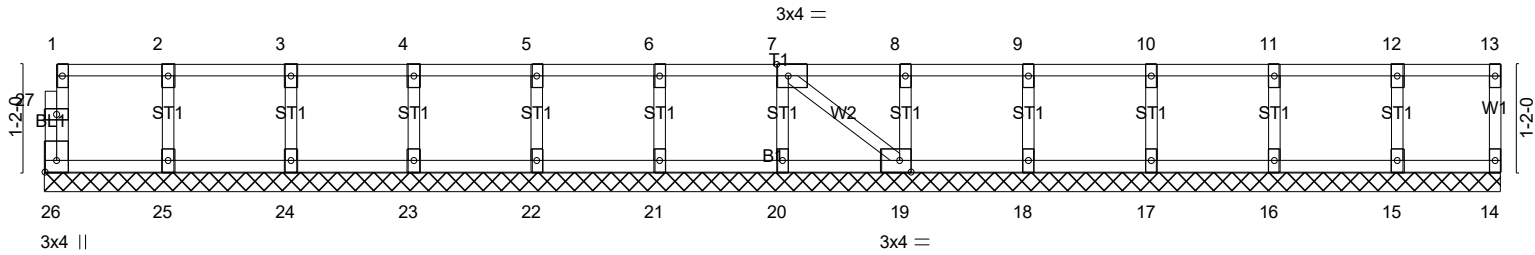

15-9-8  
15-9-8

Plate Offsets (X,Y)-- [7:0-1-8,Edge], [19:0-1-8,Edge], [26:Edge,0-1-8]

<b>LOADING</b> (psf)	<b>SPACING-</b> 2-0-0	<b>CSI.</b>	<b>DEFL.</b> in (loc) l/defl L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL 1.00	TC 0.06	Vert(LL) n/a - n/a 999	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.01	Vert(CT) n/a - n/a 999		
BCLL 0.0	Rep Stress Incr YES	WB 0.03	Horz(CT) 0.00 14 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH		Weight: 68 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)  
OTHERS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS.** All bearings 15-9-8.  
(lb) - Max Grav All reactions 250 lb or less at joint(s) 26, 14, 25, 24, 23, 22, 21, 20, 19, 18, 17, 16, 15

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (7)
- All plates are 1.5x3 MT20 unless otherwise indicated.
  - Gable requires continuous bottom chord bearing.
  - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - Gable studs spaced at 1-4-0 oc.
  - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
  - CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard




7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-16	Truss Type Floor Supported Gable	Qty 1	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	-------------------------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:32 2024 Page 1  
ID:oDuWOOMhLxMOj2fwcp2aKqzMG6w-VbAGyIGjRU05OoZVTpCsz8D8NJ9Yee?Y1FskMgyuaZT

Scale = 1:29.4

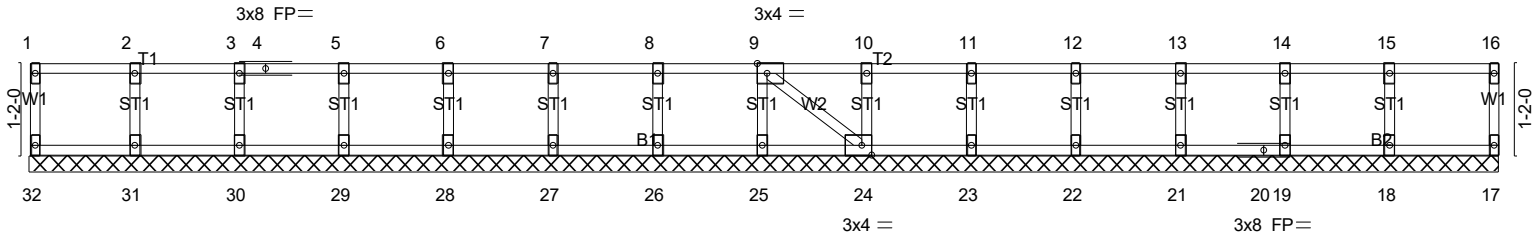

18-8-12  
18-8-12

Plate Offsets (X,Y)-- [9:0-1-8,Edge], [24:0-1-8,Edge]

<b>LOADING</b> (psf)	<b>SPACING-</b> 2-0-0	<b>CSI.</b>	<b>DEFL.</b> in (loc) l/defl L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL 1.00	TC 0.07	Vert(LL) n/a - n/a 999	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.01	Vert(CT) n/a - n/a 999		
BCLL 0.0	Rep Stress Incr YES	WB 0.03	Horz(CT) 0.00 24 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH			
				Weight: 78 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)  
OTHERS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS.** All bearings 18-8-12.  
(lb) - Max Grav All reactions 250 lb or less at joint(s) 32, 17, 31, 30, 29, 28, 27, 26, 25, 24, 23, 22, 21, 19, 18

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

**NOTES-** (6)  
1) All plates are 1.5x3 MT20 unless otherwise indicated.  
2) Gable requires continuous bottom chord bearing.  
3) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).  
4) Gable studs spaced at 1-4-0 oc.  
5) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

**LOAD CASE(S)** Standard




7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-17	Truss Type Floor	Qty 9	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:32 2024 Page 1  
ID:oDuWOOMhLxMOj2fwcp2aKqzMG6w-VbAGyIGjRU05OoZVTpCsz8D4PJ0ieYRY1FskMgyuaZT



Scale = 1:31.2


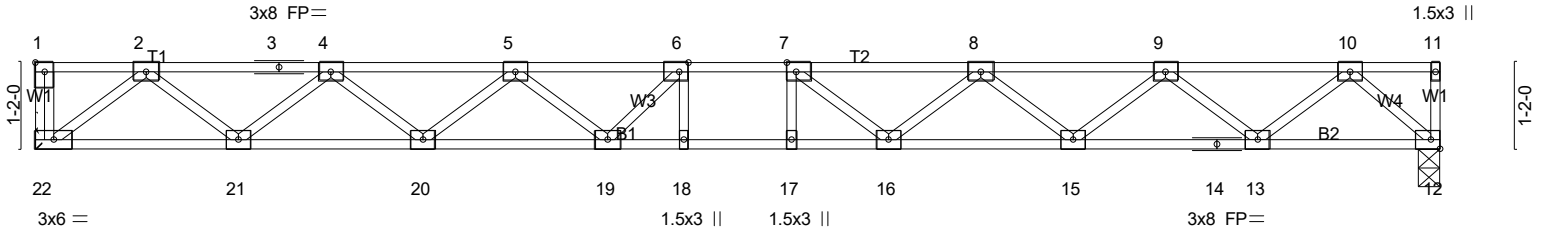


Plate Offsets (X,Y)-- [1:Edge,0-1-8], [6:0-1-8,Edge], [7:0-1-8,Edge]

<b>LOADING</b> (psf)	<b>SPACING-</b>	1-4-0	<b>CSI.</b>	<b>DEFL.</b>	in (loc)	l/defl	L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL	1.00	TC 0.32	Vert(LL)	-0.24	17	>926	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.64	Vert(CT)	-0.34	17-18	>673		
BCLL 0.0	Rep Stress Incr	YES	WB 0.39	Horz(CT)	0.06	12	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 95 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS.** (lb/size) 22=691/Mechanical, 12=691/0-3-8 (min. 0-1-8)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 2-3=-1475/0, 3-4=-1475/0, 4-5=-2448/0, 5-6=-2979/0, 6-7=-3109/0, 7-8=-2945/0, 8-9=-2382/0, 9-10=-1368/0  
BOT CHORD 21-22=0/863, 20-21=0/2064, 19-20=0/2811, 18-19=0/3109, 17-18=0/3109, 16-17=0/3109, 15-16=0/2768, 14-15=0/1976,  
13-14=0/1976, 12-13=0/739  
WEBS 2-22=-1083/0, 2-21=0/796, 4-21=-767/0, 4-20=0/499, 5-20=-474/0, 5-19=0/321, 6-19=-366/80, 7-16=-382/56,  
8-16=0/317, 8-15=-504/0, 9-15=0/528, 9-13=-791/0, 10-13=0/819, 10-12=-994/0

**NOTES-** (5)  
1) Unbalanced floor live loads have been considered for this design.  
2) All plates are 3x4 MT20 unless otherwise indicated.  
3) Refer to girder(s) for truss to truss connections.  
4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

**LOAD CASE(S)** Standard




7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-18	Truss Type Floor	Qty 4	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:33 2024 Page 1  
ID:oDuW00MhLxM0j2fwcp2aKqzMG6w-zoje9eGMC08y0x8i1Wj5VMICXjGtNtahGvclv6yuaZS



Scale = 1:31.1


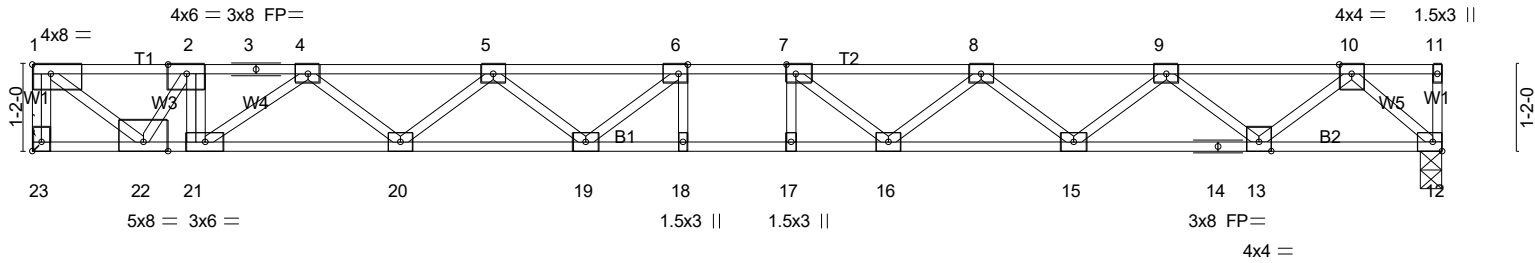


Plate Offsets (X,Y)-- [1:Edge,0-1-8], [6:0-1-8,Edge], [7:0-1-8,Edge], [23:Edge,0-1-8]

LOADING (psf)	SPACING-	1-4-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP	
TCLL 40.0	Plate Grip DOL	1.00	TC 0.55	Vert(LL)	-0.24	17-18	>924	480	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.96	Vert(CT)	-0.42	18	>533	360		
BCLL 0.0	Rep Stress Incr	NO	WB 0.91	Horz(CT)	0.07	12	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH							
									Weight: 98 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (lb/size) 23=1224/Mechanical, 12=757/0-3-8 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
 TOP CHORD 1-23=-1215/0, 1-2=-1522/0, 2-3=-2307/0, 3-4=-2307/0, 4-5=-3246/0, 5-6=-3664/0, 6-7=-3710/0, 7-8=-3416/0, 8-9=-2692/0, 9-10=-1521/0  
 BOT CHORD 21-22=0/2307, 20-21=0/2900, 19-20=0/3572, 18-19=0/3710, 17-18=0/3710, 16-17=0/3710, 15-16=0/3152, 14-15=0/2210, 13-14=0/2210, 12-13=0/811  
 WEBS 2-21=0/424, 7-16=-551/0, 8-16=0/432, 8-15=-598/0, 9-15=0/628, 9-13=-897/0, 10-13=0/923, 10-12=-1092/0, 11-22=0/1910, 2-22=-1395/0, 5-20=-425/0, 4-20=0/450, 4-21=-721/0

- NOTES- (7)
- Unbalanced floor live loads have been considered for this design.
  - All plates are 3x4 MT20 unless otherwise indicated.
  - Refer to girder(s) for truss to truss connections.
  - Load case(s) 1, 2, 3, 4, 5, 6 has/have been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
  - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
  - CAUTION, Do not erect truss backwards.

- LOAD CASE(S) Standard
- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00  
 Uniform Loads (plf)  
 Vert: 12-23=-7, 1-11=-67  
 Concentrated Loads (lb)  
 Vert: 2=-600
  - Dead: Lumber Increase=1.00, Plate Increase=1.00  
 Uniform Loads (plf)  
 Vert: 12-23=-7, 1-11=-67  
 Concentrated Loads (lb)  
 Vert: 2=-600
  - 1st chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00  
 Uniform Loads (plf)  
 Vert: 12-23=-7, 1-7=-67, 7-11=-13  
 Concentrated Loads (lb)  
 Vert: 2=-600



7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.



Job	Truss	Truss Type	Qty	Ply	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC
24-5444-F02	F2-18	Floor	4	1	Job Reference (optional) # 50804

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:33 2024 Page 2  
ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-zoje9eGMC08y0x8i1Wj5VMICXjGtNtahGvclv6yuaZS

**LOAD CASE(S)** Standard

4) 2nd chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00

Uniform Loads (plf)

Vert: 12-23=-7, 1-6=-13, 6-11=-67

Concentrated Loads (lb)

Vert: 2=-600

5) 3rd chase Dead: Lumber Increase=1.00, Plate Increase=1.00

Uniform Loads (plf)

Vert: 12-23=-7, 1-7=-67, 7-11=-13

Concentrated Loads (lb)

Vert: 2=-600

6) 4th chase Dead: Lumber Increase=1.00, Plate Increase=1.00

Uniform Loads (plf)

Vert: 12-23=-7, 1-6=-13, 6-11=-67

Concentrated Loads (lb)

Vert: 2=-600




7/24/2024

**Warning !—Verify design parameters and read notes before use.** This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC
24-5444-F02	F2-19	Floor	2	1	Job Reference (optional) # 50804

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:33 2024 Page 1  
ID: oDuW00MhLxMOj2fwcp2aKqzMG6w-zoje9eGMC08y0x8i1Wj5VMIFVjllNudhGvclv6yuaZS



Scale = 1:31.3

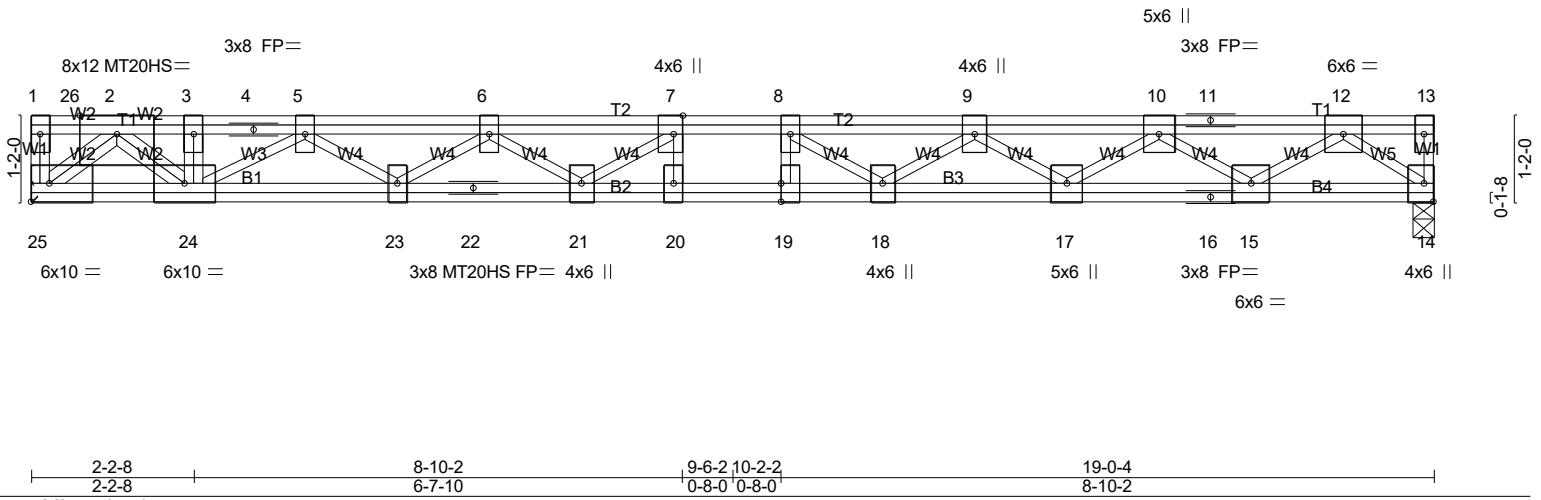


Plate Offsets (X,Y)-- [7:0-3-0,Edge], [19:0-3-0,0-0-0]

LOADING (psf)	SPACING-	1-4-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP	
TCLL 40.0	Plate Grip DOL	1.00	TC 0.36	Vert(LL)	-0.16	19	>999	480	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.84	Vert(CT)	-0.43	20-21	>529	360	MT20HS	187/143
BCLL 0.0	Rep Stress Incr	NO	WB 0.84	Horz(CT)	0.06	14	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH							
										Weight: 152 lb FT = 20%F, 11%E

**LUMBER-**

TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)

**BRACING-**

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS.** (lb/size) 25=3409/Mechanical, 14=957/0-3-8 (min. 0-1-8)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-25=-376/0, 2-3=-6025/0, 3-4=-6105/0, 4-5=-6105/0, 5-6=-6669/0, 6-7=-6578/0, 7-8=-6203/0, 8-9=-5446/0, 9-10=-4078/0, 10-11=-2226/0, 11-12=-2226/0  
BOT CHORD 24-25=0/3409, 23-24=0/6544, 22-23=0/6775, 21-22=0/6775, 20-21=0/6203, 19-20=0/6203, 18-19=0/6203, 17-18=0/4848, 16-17=0/3274, 15-16=0/3274, 14-15=0/1159  
WEBS 3-24=-2135/0, 7-20=-361/0, 8-19=0/373, 8-18=-1108/0, 9-18=0/837, 9-17=-955/0, 10-17=0/997, 10-15=-1300/0, 12-15=0/1323, 12-14=-1479/0, 2-25=-4541/0, 2-24=0/3537, 7-21=0/748, 6-21=-444/0, 5-24=-511/0

**NOTES-** (8)

- Unbalanced floor live loads have been considered for this design.
- All plates are MT20 plates unless otherwise indicated.
- All plates are 3x6 MT20 unless otherwise indicated.
- Refer to girder(s) for truss to truss connections.
- Load case(s) 1, 2, 3, 4, 5, 6 has/have been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00  
Uniform Loads (plf)  
Vert: 14-25=-7, 1-3=-157, 3-13=-67  
Concentrated Loads (lb)  
Vert: 3=-2188 26=-610
- Dead: Lumber Increase=1.00, Plate Increase=1.00  
Uniform Loads (plf)  
Vert: 14-25=-7, 1-3=-157, 3-13=-67  
Concentrated Loads (lb)  
Vert: 3=-2188 26=-610
- 1st chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00  
Uniform Loads (plf)  
Vert: 14-25=-7, 1-3=-157, 3-8=-67, 8-13=-13



7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC
24-5444-F02	F2-19	Floor	2	1	Job Reference (optional) # 50804

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:33 2024 Page 2  
ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-zoje9eGMC08y0x8i1Wj5VMIFVjIINudhGvclv6yuaZS

**LOAD CASE(S)** Standard

- Concentrated Loads (lb)  
Vert: 3=-2188 26=-610
- 4) 2nd chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00  
Uniform Loads (plf)  
Vert: 14-25=-7, 1-3=-103, 3-7=-13, 7-13=-67  
Concentrated Loads (lb)  
Vert: 3=-2188 26=-610
- 5) 3rd chase Dead: Lumber Increase=1.00, Plate Increase=1.00  
Uniform Loads (plf)  
Vert: 14-25=-7, 1-3=-157, 3-8=-67, 8-13=-13  
Concentrated Loads (lb)  
Vert: 3=-2188 26=-610
- 6) 4th chase Dead: Lumber Increase=1.00, Plate Increase=1.00  
Uniform Loads (plf)  
Vert: 14-25=-7, 1-3=-103, 3-7=-13, 7-13=-67  
Concentrated Loads (lb)  
Vert: 3=-2188 26=-610




7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-20	Truss Type Floor Supported Gable	Qty 1	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 50804
--------------------	----------------	-------------------------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:34 2024 Page 1  
ID: oDuW00MhLxMOj2fwcp2aKqzMG6w-R\_H0N\_H\_z5Gpd5jubEEK2ZIMD7rx6WtrVZLrRYyuaZr

Scale = 1:30.6

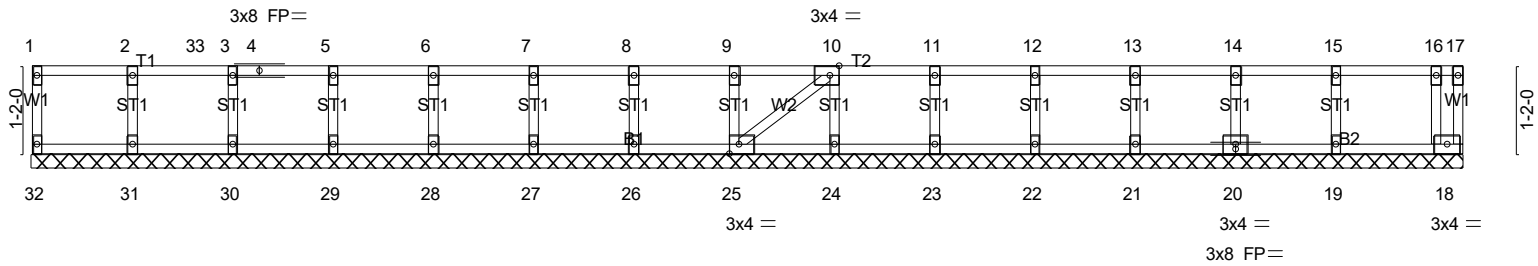

19-0-4  
19-0-4

Plate Offsets (X,Y)-- [10:0-1-8,Edge], [25:0-1-8,Edge]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.62	Vert(LL)	n/a	-	n/a	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	NO	WB 0.14	Horz(CT)	0.00	18	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 81 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)  
OTHERS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS.** All bearings 19-0-4.  
(lb) - Max Grav All reactions 250 lb or less at joint(s) 32, 18, 29, 28, 27, 26, 25, 24, 23, 22, 21, 20, 19 except  
31=387(LC 1), 30=615(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
WEBS 2-31=-372/0, 3-30=-602/0

- NOTES-** (7)
- All plates are 1.5x3 MT20 unless otherwise indicated.
  - Gable requires continuous bottom chord bearing.
  - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - Gable studs spaced at 1-4-0 oc.
  - Load case(s) 1, 2 has/have been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
  - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

**LOAD CASE(S)** Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00  
Uniform Loads (plf)  
Vert: 18-32=-10, 1-17=-100  
Concentrated Loads (lb)  
Vert: 33=-600
- Dead: Lumber Increase=1.00, Plate Increase=1.00  
Uniform Loads (plf)  
Vert: 18-32=-10, 1-17=-100  
Concentrated Loads (lb)  
Vert: 33=-600




7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-21	Truss Type Floor Supported Gable	Qty 1	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	-------------------------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:34 2024 Page 1  
ID: oDuW00MhLxMOj2fwcp2aKqzMG6w-R\_H0N\_H\_z5Gpd5jubEEK2ZIVC7r26YcrVZLrRYyuaZR  
3x4 =

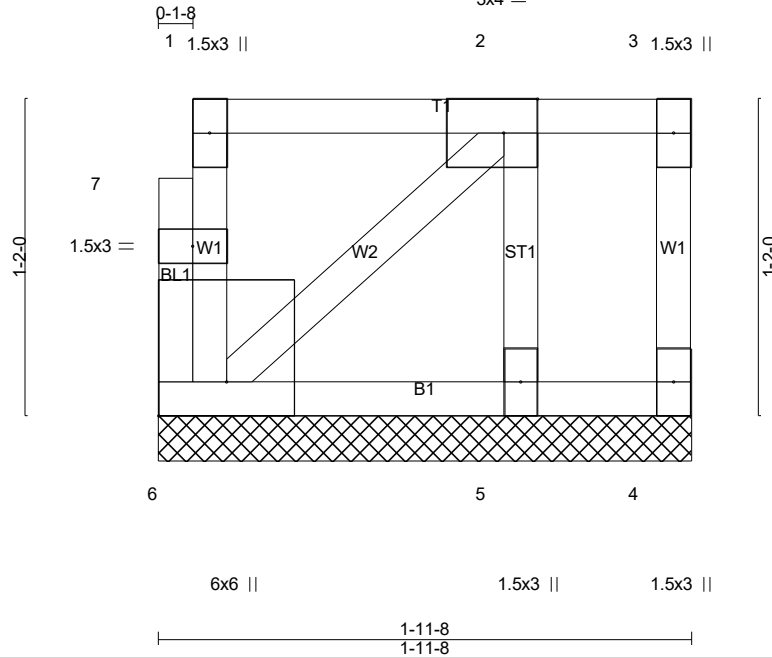

Scale = 1:8.5

Plate Offsets (X,Y)-- [2:0-1-8,Edge], [6:Edge,0-3-0]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.05	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00		n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-P							
									Weight: 13 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)  
OTHERS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 1-11-8 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS.** (lb/size) 4=8/1-11-8 (min. 0-1-8), 6=50/1-11-8 (min. 0-1-8), 5=131/1-11-8 (min. 0-1-8)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (6)  
1) Gable requires continuous bottom chord bearing.  
2) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).  
3) Gable studs spaced at 1-4-0 oc.  
4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.  
5) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard



7/24/2024


**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-22	Truss Type Floor	Qty 3	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) # 50804
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:35 2024 Page 1  
ID:oDuWOOMhLxMOj2fwcp2aKqzMG6w-vArPaKlckPOgFFI48xlZanranX1urtK\_id5Pz?yuaZQ

0-1-8

0-3-1  
Scale = 1:35.6

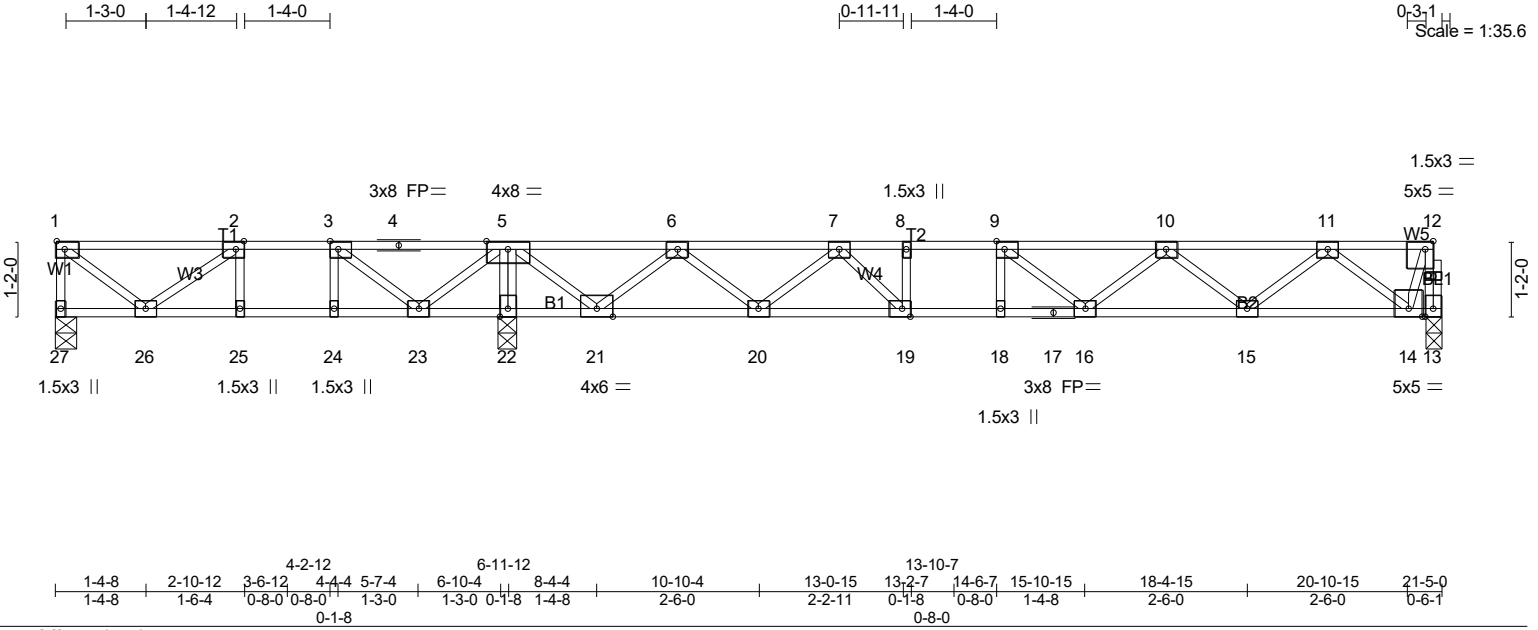

LOADING (psf)		SPACING-		CSI.		DEFL.				PLATES		GRIP	
TCLL	40.0	Plate Grip DOL	2-0-0	TC	0.44	Vert(LL)	-0.13	16-18	>999	L/d	480	MT20	244/190
TCDL	10.0	Lumber DOL	1.00	BC	0.67	Vert(CT)	-0.17	16-18	>999	L/d	360		
BCLL	0.0	Rep Stress Incr	YES	WB	0.57	Horz(CT)	0.03	13	n/a	n/a			
BCDL	5.0	Code IRC2021/TPI2014		Matrix-SH									Weight: 109 lb FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

**REACTIONS.** (lb/size) 27=222/0-3-8 (min. 0-1-8), 13=710/0-3-0 (min. 0-1-8), 22=1403/0-3-8 (min. 0-1-8)  
Max Uplift 27=-46(LC 4)  
Max Grav 27=327(LC 3), 13=724(LC 7), 22=1403(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 1-27=-328/37, 12-13=-729/0, 1-2=-259/94, 2-3=-475/327, 3-4=-74/687, 4-5=-74/687, 6-7=-1459/0, 7-8=-2233/0, 8-9=-2233/0, 9-10=-2168/0, 10-11=-1535/0  
BOT CHORD 25-26=-327/475, 24-25=-327/475, 23-24=-327/475, 22-23=-1130/0, 21-22=-1130/0, 20-21=0/961, 19-20=0/1956, 18-19=0/2233, 17-18=0/2233, 16-17=0/2233, 15-16=0/2024, 14-15=0/1020  
WEBS 3-24=0/261, 8-19=-250/0, 5-22=-1348/0, 1-26=-120/330, 2-26=-266/286, 3-23=-768/0, 5-23=0/626, 5-21=0/1202, 6-21=-1111/0, 6-20=0/691, 7-20=-698/0, 7-19=0/575, 9-16=-250/129, 10-16=0/259, 10-15=-637/0, 11-15=0/669, 11-14=-1010/0, 12-14=0/712

- NOTES-** (6)  
1) Unbalanced floor live loads have been considered for this design.  
2) All plates are 3x4 MT20 unless otherwise indicated.  
3) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 46 lb uplift at joint 27.  
4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.  
5) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard



7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-23	Truss Type Floor	Qty 2	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:36 2024 Page 1  
ID:oDuWOOMhLxMOj2fwcp2aKqzMG6w-OMPnngJEVjWXtPtHifGo7\_NjDxMbaL58ytqVRYuaZP



Scale = 1:39.3

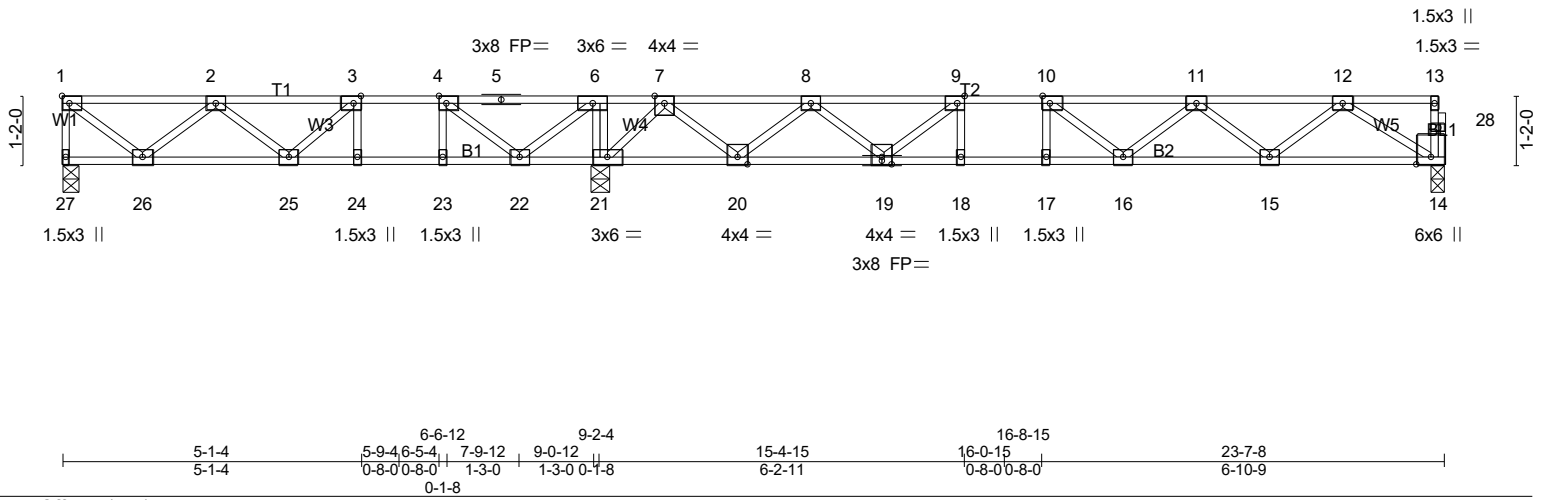


Plate Offsets (X,Y)-- [3:0-1-8,Edge], [4:0-1-8,Edge], [9:0-1-8,Edge], [10:0-1-8,Edge]

<b>LOADING</b> (psf)	<b>SPACING-</b>	2-0-0	<b>CSI.</b>	<b>DEFL.</b>	in (loc)	l/defl	L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL	1.00	TC 0.53	Vert(LL)	-0.12 16-17	>999	480	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.70	Vert(CT)	-0.16 16-17	>999	360		
BCLL 0.0	Rep Stress Incr	YES	WB 0.48	Horz(CT)	0.03 14	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 119 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)


**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

**REACTIONS.** (lb/size) 27=360/0-3-8 (min. 0-1-8), 21=1522/0-3-8 (min. 0-1-8), 14=690/0-3-0 (min. 0-1-8)  
Max Grav 27=453(LC 3), 21=1522(LC 1), 14=701(LC 7)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 1-27=-445/2, 1-2=-438/22, 2-3=-859/198, 3-4=-763/443, 4-5=-156/835, 5-6=-156/835,  
6-7=0/1283, 7-8=-539/0, 8-9=-1664/0, 9-10=-2128/0, 10-11=-2083/0, 11-12=-1491/0  
BOT CHORD 25-26=-58/842, 24-25=-443/763, 23-24=-443/763, 22-23=-443/763, 21-22=-1283/0,  
20-21=-429/0, 19-20=0/1252, 18-19=0/2128, 17-18=0/2128, 16-17=0/2128, 15-16=0/1962,  
14-15=0/990  
WEBS 3-24=-303/0, 4-23=0/318, 6-21=-653/0, 1-26=-28/560, 2-26=-526/47, 3-25=0/406,  
4-22=-1008/0, 6-22=0/832, 9-19=-655/0, 8-19=0/565, 8-20=-958/0, 7-20=0/998,  
7-21=-1230/0, 11-15=-612/0, 12-15=0/652, 12-14=-1171/0

**NOTES-** (5)  
1) Unbalanced floor live loads have been considered for this design.  
2) All plates are 3x4 MT20 unless otherwise indicated.  
3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.  
4) CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard



7/24/2024



**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-5444-F02	Truss F2-24	Truss Type Floor	Qty 4	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:37 2024 Page 1  
ID: oDuW00MhLxMOj2fwcp2aKqzMG6w-sZz970JsG0eOUZSTGMn1fCwxfk4JovHBXaV2tyuaZO



Scale = 1:22.5

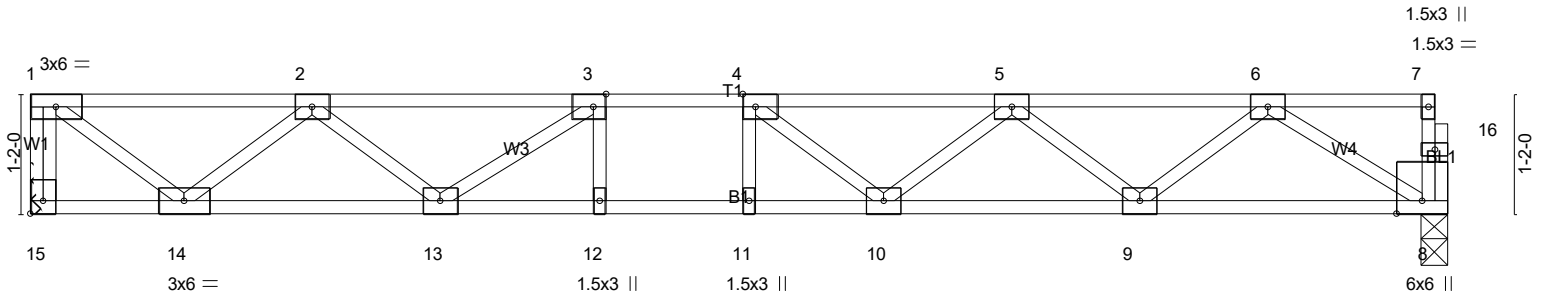

<b>LOADING</b> (psf)	<b>SPACING-</b>	2-0-0	<b>CSI.</b>	<b>DEFL.</b>	in (loc)	l/defl	L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL 1.00		TC 0.35	Vert(LL) -0.12	11	>999	480	MT20	244/190
TCDL 10.0	Lumber DOL 1.00		BC 0.69	Vert(CT) -0.16	10-11	>999	360		
BCLL 0.0	Rep Stress Incr YES		WB 0.50	Horz(CT) 0.03	8	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 70 lb	FT = 20%F, 11%E

**LUMBER-**  
TOP CHORD 2x4 SP No.1(flat)  
BOT CHORD 2x4 SP No.1(flat)  
WEBS 2x4 SP No.3(flat)

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

**REACTIONS.** (lb/size) 15=747/Mechanical, 8=741/0-3-0 (min. 0-1-8)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 1-15=-742/0, 1-2=-843/0, 2-3=-1948/0, 3-4=-2410/0, 4-5=-2287/0, 5-6=-1600/0  
BOT CHORD 13-14=0/1579, 12-13=0/2410, 11-12=0/2410, 10-11=0/2410, 9-10=0/2114, 8-9=0/1053  
WEBS 1-14=0/1057, 2-14=-959/0, 2-13=0/481, 3-13=-623/0, 4-10=-353/77, 5-10=0/311, 5-9=-669/0, 6-9=0/712, 6-8=-1246/0

- NOTES-** (6)
- Unbalanced floor live loads have been considered for this design.
  - All plates are 3x4 MT20 unless otherwise indicated.
  - Refer to girder(s) for truss to truss connections.
  - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
  - CAUTION, Do not erect truss backwards.

**LOAD CASE(S)** Standard



7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.



Job 24-5444-F02	Truss F2-25	Truss Type Floor	Qty 5	Ply 1	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC Job Reference (optional) <b># 50804</b>
--------------------	----------------	---------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:38 2024 Page 1  
ID: oDuW00MhLxMOj2fwcp2aKqzMG6w-KIXXCMKU1KmF6j1fq3IGCPT7Tk5I2G\_QPBJ3aJyuaZN

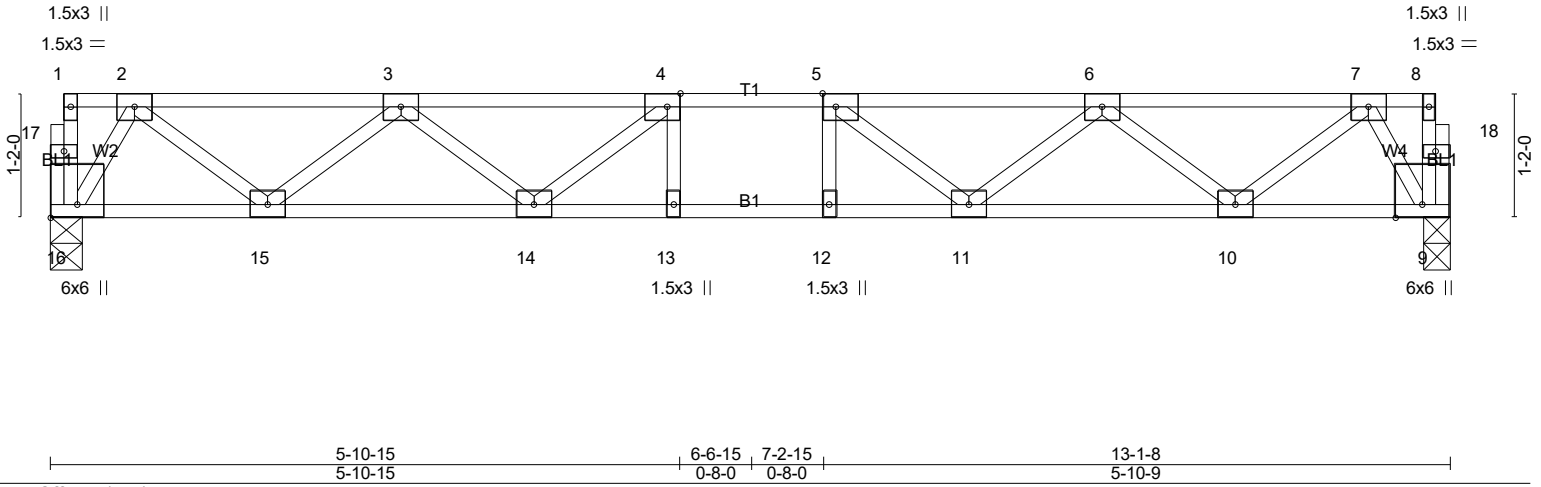



Plate Offsets (X,Y)-- [4:0-1-8,Edge], [5:0-1-8,Edge], [16:Edge,0-3-0]					
<b>LOADING</b> (psf)	<b>SPACING-</b> 2-0-0	<b>CSI.</b>	<b>DEFL.</b> in (loc) l/defl L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL 1.00	TC 0.29	Vert(LL) -0.09 12-13 >999 480	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.53	Vert(CT) -0.12 12-13 >999 360		
BCLL 0.0	Rep Stress Incr YES	WB 0.39	Horz(CT) 0.03 9 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH		Weight: 68 lb	FT = 20%F, 11%E

<b>LUMBER-</b>	<b>BRACING-</b>
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

**REACTIONS.** (lb/size) 16=702/0-3-8 (min. 0-1-8), 9=702/0-3-0 (min. 0-1-8)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 2-3=-1078/0, 3-4=-1933/0, 4-5=-2183/0, 5-6=-1926/0, 6-7=-1063/0  
BOT CHORD 15-16=0/459, 14-15=0/1668, 13-14=0/2183, 12-13=0/2183, 11-12=0/2183, 10-11=0/1657, 9-10=0/440  
WEBS 4-14=-439/0, 3-14=0/377, 3-15=-768/0, 2-15=0/806, 2-16=-860/0, 5-11=-445/0, 6-11=0/381, 6-10=-773/0, 7-10=0/811, 7-9=-855/0

**NOTES-** (4)  
1) Unbalanced floor live loads have been considered for this design.  
2) All plates are 3x4 MT20 unless otherwise indicated.  
3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

**LOAD CASE(S)** Standard



7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0108 BLAKE POND   113 FROST MEADOW WAY LILLINGTON, NC
24-5444-F02	F2-26	GABLE	1	1	Job Reference (optional) # 50804

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 25 09:20:39 2024 Page 1  
 ID:oDuW00MhLxMOj2fwcp2aKqzMG6w-ox5vQIL6oeu6kscrNnqVld?Mn8Y Cnpnaer3c6myuaZM

0<sub>1</sub>-8

0<sub>1</sub>-8

Scale = 1:21.3

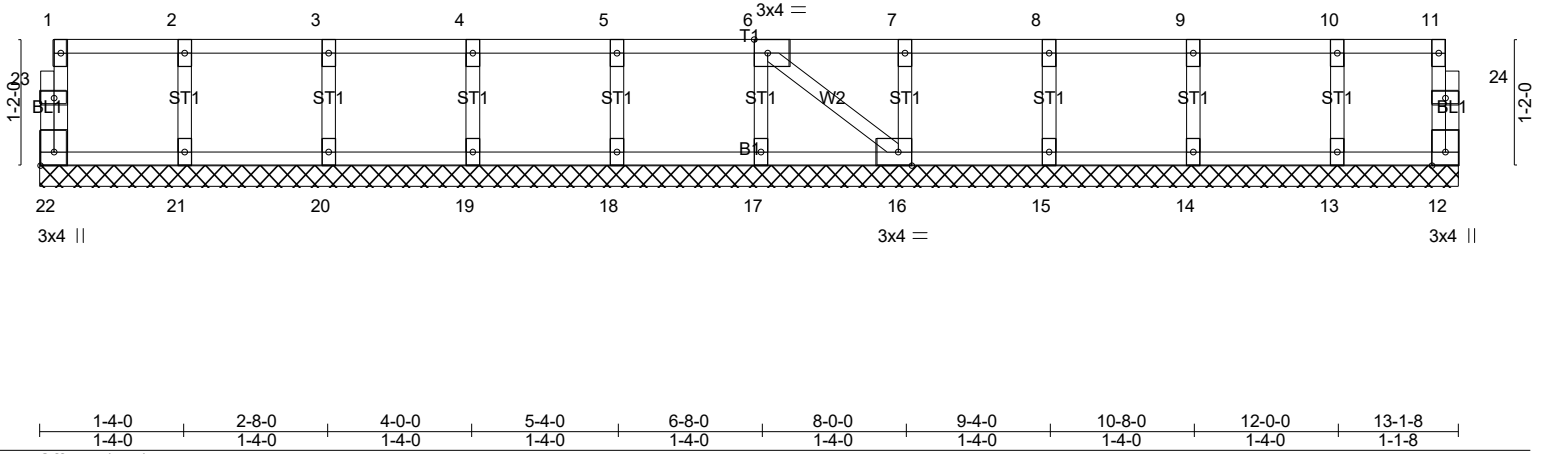


Plate Offsets (X,Y)-- [6:0-1-8,Edge], [16:0-1-8,Edge], [22:Edge,0-1-8]					
<b>LOADING</b> (psf)	<b>SPACING-</b> 2-0-0	<b>CSI.</b>	<b>DEFL.</b> in (loc) l/defl L/d	<b>PLATES</b>	<b>GRIP</b>
TCLL 40.0	Plate Grip DOL 1.00	TC 0.06	Vert(LL) n/a - n/a 999	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.01	Vert(CT) n/a - n/a 999		
BCLL 0.0	Rep Stress Incr YES	WB 0.03	Horz(CT) 0.00 12 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH		Weight: 58 lb	FT = 20%F, 11%E

<b>LUMBER-</b>	<b>BRACING-</b>
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	
OTHERS 2x4 SP No.3(flat)	

**REACTIONS.** All bearings 13-1-8.  
 (lb) - Max Grav All reactions 250 lb or less at joint(s) 22, 12, 21, 20, 19, 18, 17, 16, 15, 14, 13

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (6)
- All plates are 1.5x3 MT20 unless otherwise indicated.
  - Gable requires continuous bottom chord bearing.
  - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
  - Gable studs spaced at 1-4-0 oc.
  - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.

**LOAD CASE(S)** Standard



7/24/2024

**Warning!**—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.