

Mark Morris, P.E.

#126, 1317-M, Summerville, SC 29483

843 209-5784, Fax (866)-213-4614

The truss drawing(s) listed below have been prepared by **Atlantic Building Components** under my direct supervision based on the parameters provided by the truss designers.

AST #: 50513

JOB: 24-5967-F01

JOB NAME: LOT 0.0041 HONEYCUTT HILLS

Wind Code: N/A

Wind Speed: Vult= N/A

Exposure Category: N/A

Mean Roof Height (feet): N/A

These truss designs comply with IRC 2015 as well as IRC 2018.

15 Truss Design(s)

Trusses:

F101, F102, F103, F104, F105, F106, F107, F107A, F108, F109, F110, F111, F112, F113, F114



7/11/2024

Mark Morris

Warning !—Verify design parameters and read notes before use.


This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI

| | | | | | |
|-------------|-------|-----------------------|-----|-----|--|
| Job | Truss | Truss Type | Qty | Ply | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC |
| 24-5967-F01 | F101 | Floor Supported Gable | 1 | 1 | |
| | | | | | # 50513 |

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:46 2024 Page 1
 ID:YrqHYj0sGK239HELXZ6g?zynRG-HbBYTbx6zLoULBQDJ4iPAvtGLIj5dPcfvbio9yz1fp

0-1-8

Scale = 1:40.8

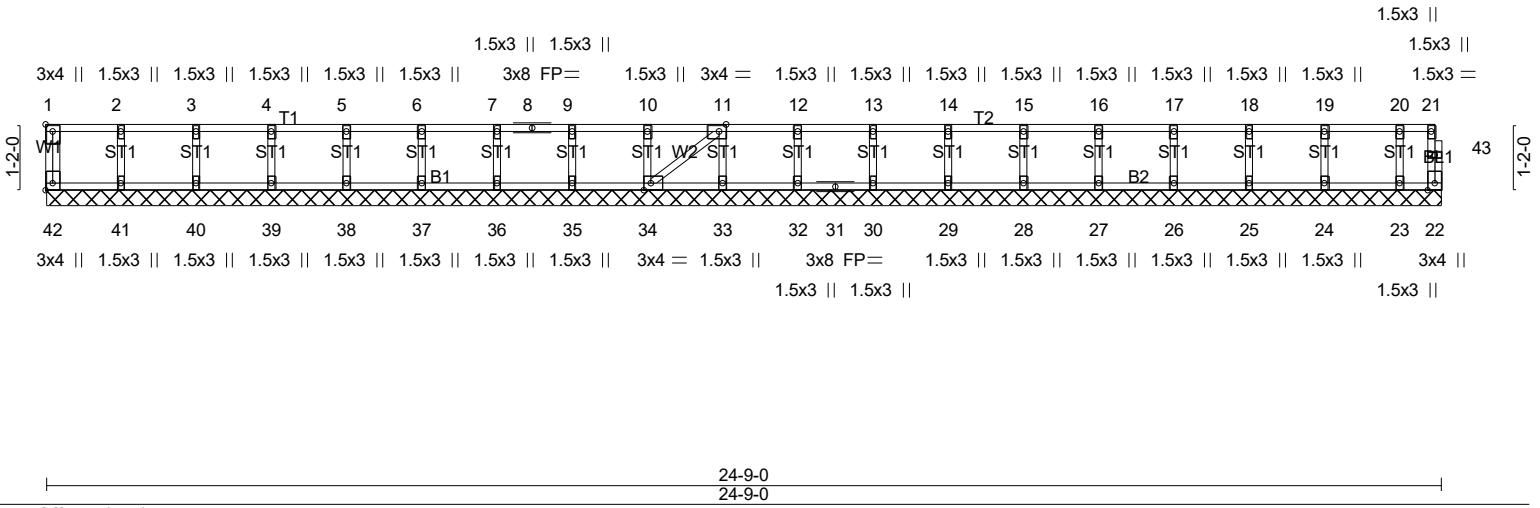

| | | | | | |
|---|-----------------------|-------------|----------------------------------|--------------------------------|-------------|
| Plate Offsets (X,Y)-- [1:Edge,0-1-8], [11:0-1-8,Edge], [34:0-1-8,Edge], [42:Edge,0-1-8] | | | | | |
| LOADING (psf) | SPACING- 2-0-0 | CSI. | DEFL. in (loc) l/defl L/d | PLATES | GRIP |
| TCLL 40.0 | Plate Grip DOL 1.00 | TC 0.06 | Vert(LL) n/a - n/a 999 | MT20 | 244/190 |
| TCDL 10.0 | Lumber DOL 1.00 | BC 0.01 | Vert(CT) n/a - n/a 999 | | |
| BCLL 0.0 | Rep Stress Incr YES | WB 0.03 | Horz(CT) 0.00 22 n/a n/a | | |
| BCDL 5.0 | Code IRC2021/TPI2014 | Matrix-SH | | | |
| | | | | Weight: 105 lb FT = 20%F, 11%E | |

| | |
|-----------------------------|---|
| LUMBER- | BRACING- |
| TOP CHORD 2x4 SP No.1(flat) | TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals. |
| BOT CHORD 2x4 SP No.1(flat) | BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing. |
| WEBS 2x4 SP No.3(flat) | |
| OTHERS 2x4 SP No.3(flat) | |

REACTIONS. All bearings 24-9-0.
 (lb) - Max Grav All reactions 250 lb or less at joint(s) 42, 22, 41, 40, 39, 38, 37, 36, 35, 34, 33, 32, 30, 29, 28, 27, 26, 25, 24, 23

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (6-9)
- Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION. Do not erect truss backwards.
 - Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - SEE BCSI-B3 SUMMARY SHEET - PERMANENT RESTRAING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard



7/11/2024


Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | | |
|--------------------|---------------|---------------------|-----------|----------|--|---------|
| Job 24-5967-F01 | Truss F102 | Truss Type Floor | Qty 11 | Ply 1 | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC | # 50513 |
|--------------------|---------------|---------------------|-----------|----------|--|---------|

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:47 2024 Page 1
ID: lYrqHYj0sGK239HELXZ6g?zynRG-lnlwgxykkewL.yL?PtoDej6QLs9VWwQ?HluZLGKbyz1fo



Scale = 1:40.9

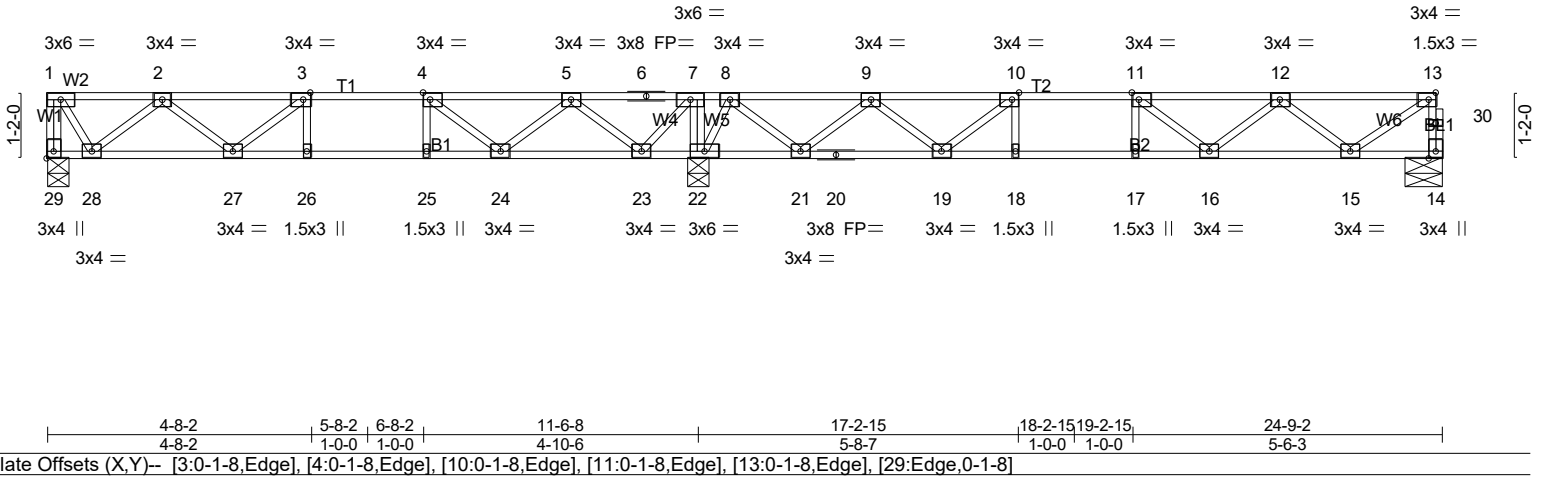

| LOADING (psf) | SPACING- | CSi. | DEFL. | PLATES | GRIP |
|---------------|------------------------------|-----------|-------------------------------|----------------|-----------------|
| TCLL 40.0 | 1-7-3 Plate Grip DOL 1.00 | TC 0.33 | in (loc) l/defl L/d | MT20 | 244/190 |
| TCDL 10.0 | Lumber DOL 1.00 | BC 0.55 | Vert(LL) -0.08 16-17 >999 480 | | |
| BCLL 0.0 | Rep Stress Incr YES | WB 0.38 | Vert(CT) -0.11 16-17 >999 360 | | |
| BCDL 5.0 | Code IRC2021/TPI2014 | Matrix-SH | Horz(CT) 0.02 14 n/a n/a | | |
| | | | | Weight: 124 lb | FT = 20%F, 11%E |

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 23-24,22-23,21-22,19-21.

REACTIONS. (lb/size) 29=412/0-4-8 (min. 0-1-8), 14=492/0-7-14 (min. 0-1-8), 22=1246/0-4-8 (min. 0-1-8)
Max Grav 29=451(LC 3), 14=517(LC 7), 22=1246(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-29=-449/0, 14-30=-511/0, 13-30=-510/0, 1-2=-257/0, 2-3=-921/0, 3-4=-1085/0, 4-5=-754/165, 5-6=0/617, 6-7=0/617, 7-8=0/1045, 8-9=-262/245, 9-10=-1121/0, 10-11=-1455/0, 11-12=-1306/0, 12-13=-624/0
BOT CHORD 27-28=0/718, 26-27=0/1085, 25-26=0/1085, 24-25=0/1085, 23-24=-327/447, 22-23=-1045/0, 21-22=-689/0, 20-21=-73/812, 19-20=-73/812, 18-19=0/1455, 17-18=0/1455, 16-17=0/1455, 15-16=0/1117
WEBS 7-22=-612/0, 2-27=-5/265, 2-28=-599/0, 1-28=0/472, 4-24=-547/0, 5-24=0/478, 5-23=-756/0, 7-23=0/691, 10-19=-527/0, 9-19=0/460, 9-21=-760/0, 8-21=0/791, 8-22=-733/0, 12-15=-642/0, 13-15=0/730

- NOTES-** (4-7)
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 3) CAUTION, Do not erect truss backwards.
 - 4) Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - 5) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - 6) Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - 7) SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard



7/11/2024


Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | | |
|--------------------|---------------|-------------------------------------|----------|----------|--|---------|
| Job 24-5967-F01 | Truss F103 | Truss Type Floor Supported Gable | Qty 1 | Ply 1 | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC | # 50513 |
|--------------------|---------------|-------------------------------------|----------|----------|--|---------|

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:48 2024 Page 1
ID:YrqHYj0sGK239HELXZ6g?zynRG-D_JluGzMVy2CaVacRVktGKzbgZ_BZXvv6D4ps2yz1fn

0-1-8

Scale = 1:40.8

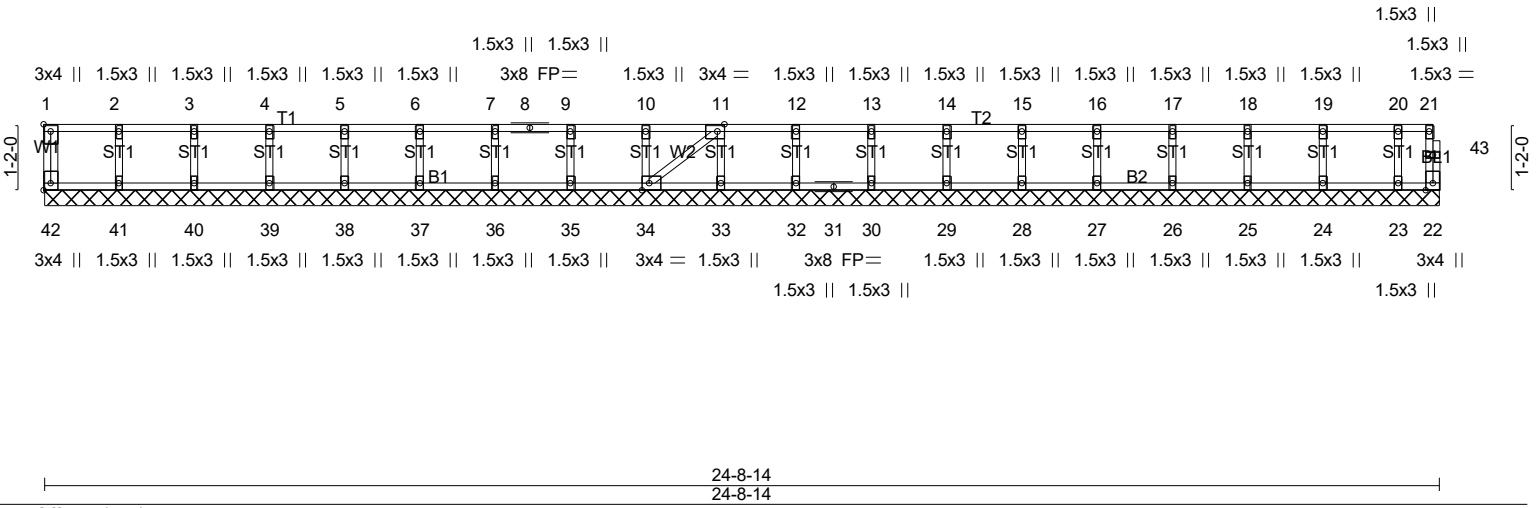

| | | | | | |
|---|-----------------------|-------------|----------------------------------|---------------|--------------------------------|
| Plate Offsets (X,Y)-- [1:Edge,0-1-8], [11:0-1-8,Edge], [34:0-1-8,Edge], [42:Edge,0-1-8] | | | | | |
| LOADING (psf) | SPACING- 2-0-0 | CSI. | DEFL. in (loc) l/defl L/d | PLATES | GRIP |
| TCLL 40.0 | Plate Grip DOL 1.00 | TC 0.06 | Vert(LL) n/a - n/a 999 | MT20 | 244/190 |
| TCDL 10.0 | Lumber DOL 1.00 | BC 0.01 | Vert(CT) n/a - n/a 999 | | |
| BCLL 0.0 | Rep Stress Incr YES | WB 0.03 | Horz(CT) 0.00 22 n/a n/a | | |
| BCDL 5.0 | Code IRC2021/TPI2014 | Matrix-SH | | | Weight: 105 lb FT = 20%F, 11%E |

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 24-8-14.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 42, 22, 41, 40, 39, 38, 37, 36, 35, 34, 33, 32, 30, 29, 28, 27, 26, 25, 24, 23

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (6-9)
- Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION. Do not erect truss backwards.
 - Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard



7/11/2024


Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | |
|--------------------|---------------|-------------------------------------|----------|----------|--|
| Job 24-5967-F01 | Truss F104 | Truss Type Floor Supported Gable | Qty 1 | Ply 1 | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC Job Reference (optional) # 50513 |
|--------------------|---------------|-------------------------------------|----------|----------|--|

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:48 2024 Page 1
ID:YrqHYj0sGK239HELXZ6g?zynRG-D_JluGzMVy2CaVacRVktGKzbsZ_BZXww6D4ps2yz1fn

0-1-8

Scale = 1:38.3

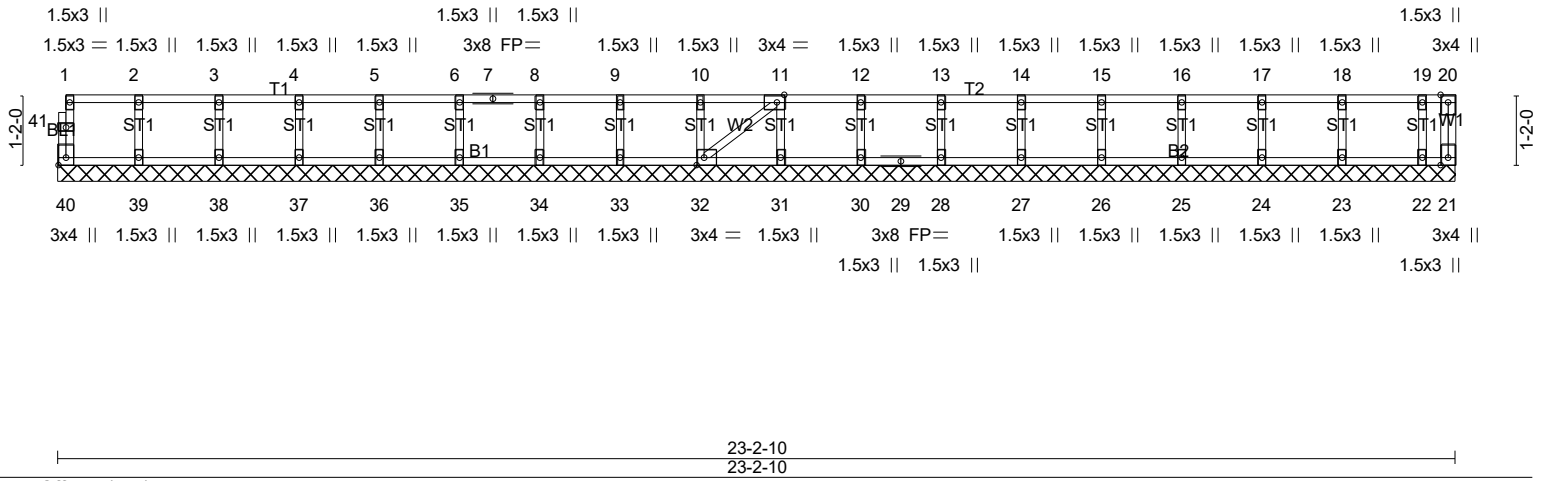

| | | | | | |
|---|-----------------------|-------------|----------------------------------|---------------|-----------------|
| Plate Offsets (X,Y)-- [11:0-1-8,Edge], [32:0-1-8,Edge], [40:Edge,0-1-8] | | | | | |
| LOADING (psf) | SPACING- 2-0-0 | CSI. | DEFL. in (loc) l/defl L/d | PLATES | GRIP |
| TCLL 40.0 | Plate Grip DOL 1.00 | TC 0.06 | Vert(LL) n/a - n/a 999 | MT20 | 244/190 |
| TCDL 10.0 | Lumber DOL 1.00 | BC 0.01 | Vert(CT) n/a - n/a 999 | | |
| BCLL 0.0 | Rep Stress Incr YES | WB 0.03 | Horz(CT) 0.00 21 n/a n/a | | |
| BCDL 5.0 | Code IRC2021/TPI2014 | Matrix-SH | | | |
| | | | | Weight: 99 lb | FT = 20%F, 11%E |

| | |
|-----------------------------|---|
| LUMBER- | BRACING- |
| TOP CHORD 2x4 SP No.1(flat) | TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals. |
| BOT CHORD 2x4 SP No.1(flat) | BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing. |
| WEBS 2x4 SP No.3(flat) | |
| OTHERS 2x4 SP No.3(flat) | |

REACTIONS. All bearings 23-2-10.
(lb) - Max Uplift All uplift 100 lb or less at joint(s) 21
Max Grav All reactions 250 lb or less at joint(s) 40, 21, 39, 38, 37, 36, 35, 34, 33, 32, 31, 30, 28, 27, 26, 25, 24, 23, 22

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (7-10)
- Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 21.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.
 - Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAINING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard




7/11/2024


Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | |
|--------------------|---------------|---------------------|----------|----------|--|
| Job 24-5967-F01 | Truss F105 | Truss Type FLOOR | Qty 9 | Ply 1 | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC Job Reference (optional) # 50513 |
|--------------------|---------------|---------------------|----------|----------|--|

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:49 2024 Page 1
ID:YrqHYj0sGK239HELXZ6g?zynRG-iAtg5c_GGA3Ce9o?DF6oXVXsy8XInz2LqNPUyz1fm



Scale = 1:19.5

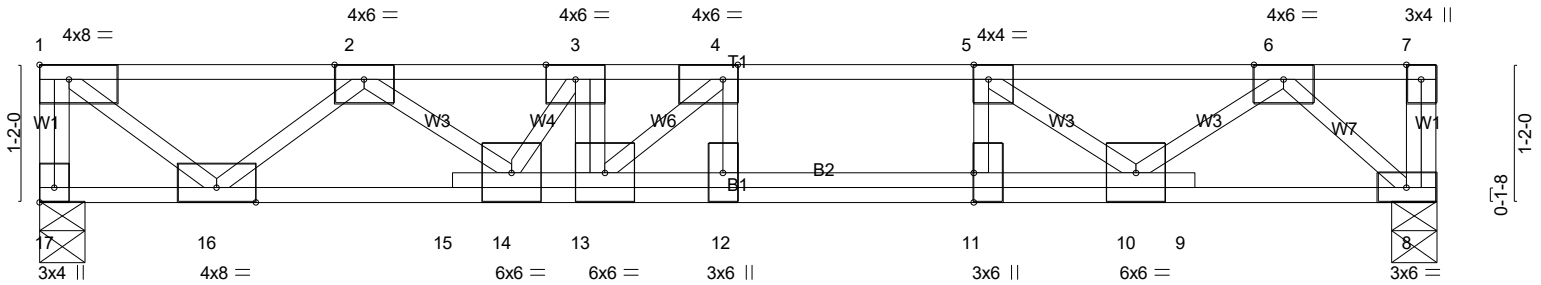

| | | | | | | |
|---|-------|------------|------------|--------|--------|---------|
| 4-8-0 | 4-8-0 | 4-9-85-3-8 | 5-9-8 | 6-11-0 | 7-11-0 | 11-10-0 |
| 4-8-0 | 4-8-0 | 0-1-80-6-0 | 0-6-00-1-8 | 1-0-0 | 1-0-0 | 3-11-0 |
| Plate Offsets (X,Y)-- [1:Edge,0-1-8], [4:0-1-8,Edge], [5:0-1-8,Edge], [11:0-3-0,0-0-0], [17:Edge,0-1-8] | | | | | | |

| LOADING (psf) | SPACING- | CSI. | DEFL. | in (loc) | l/defl | L/d | PLATES | GRIP |
|---------------|----------------------|-----------|----------------|----------|--------|-----|---------------|-----------------|
| TCLL 40.0 | Plate Grip DOL 1.00 | TC 1.00 | Vert(LL) -0.04 | 12 | >999 | 480 | MT20 | 244/190 |
| TCDL 10.0 | Lumber DOL 1.00 | BC 0.83 | Vert(CT) -0.24 | 12-13 | >583 | 360 | | |
| BCLL 0.0 | Rep Stress Incr NO | WB 0.88 | Horz(CT) 0.03 | 8 | n/a | n/a | | |
| BCDL 5.0 | Code IRC2021/TPI2014 | Matrix-SH | | | | | | |
| | | | | | | | Weight: 71 lb | FT = 20%F, 11%E |

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP SS(flat)
WEBS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 17=1195/0-4-8 (min. 0-1-8), 8=921/0-4-8 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-17=-1185/0, 1-2=-1466/0, 2-3=-3986/0, 3-4=-4800/0, 4-5=-3578/0, 5-6=-1966/0
BOT CHORD 15-16=0/2800, 14-15=0/2781, 13-14=0/4800, 12-13=0/3578, 11-12=0/3578, 10-11=0/3578, 9-10=0/963, 8-9=0/970
WEBS 3-13=-251/0, 4-12=-1038/0, 5-11=0/982, 1-16=0/1840, 2-16=-1736/0, 2-14=0/1506, 3-14=-1447/0, 4-13=0/1700, 5-10=-2012/0, 6-10=0/1264, 6-8=-1301/0

NOTES- (5-8)
1) Unbalanced floor live loads have been considered for this design.
2) Load case(s) 1, 2, 3, 4, 5, 6 has/have been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
4) CAUTION. Do not erect truss backwards.
5) Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
6) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
7) Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
8) SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard
1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 8-17=-7, 1-7=-67
Concentrated Loads (lb)
Vert: 3=-1267
2) Dead: Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 8-17=-7, 1-7=-67
Concentrated Loads (lb)
Vert: 3=-1267



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| Job | Truss | Truss Type | Qty | Ply | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC |
|-------------|-------|------------|-----|-----|--|
| 24-5967-F01 | F105 | FLOOR | 9 | 1 | Job Reference (optional) # 50513 |

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:49 2024 Page 2
 ID:YrqHYj0sGK239HELXZ6g?zynRG-iAtg5c__GGA3Ce9o?DF6oXVXsy8XInz2LtqNPUyz1fm

LOAD CASE(S) Standard

- 3) 1st chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 8-17=-7, 1-5=-67, 5-7=-13
 - Concentrated Loads (lb)
 - Vert: 3=-1267
- 4) 2nd chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 8-17=-7, 1-4=-13, 4-7=-67
 - Concentrated Loads (lb)
 - Vert: 3=-1267
- 5) 3rd chase Dead: Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 8-17=-7, 1-5=-67, 5-7=-13
 - Concentrated Loads (lb)
 - Vert: 3=-1267
- 6) 4th chase Dead: Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 8-17=-7, 1-4=-13, 4-7=-67
 - Concentrated Loads (lb)
 - Vert: 3=-1267




7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | | |
|--------------------|---------------|---------------------|----------|----------|--|---------|
| Job 24-5967-F01 | Truss F106 | Truss Type Floor | Qty 4 | Ply 1 | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC | # 50513 |
|--------------------|---------------|---------------------|----------|----------|--|---------|

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:49 2024 Page 1
ID:YrqHYj0sGK239HELXZ6g?zynRG-iAtg5c_GGA3Ce9o?DF6oXVjEyE9lwH2LqNPUyz1fm



Scale = 1:19.2

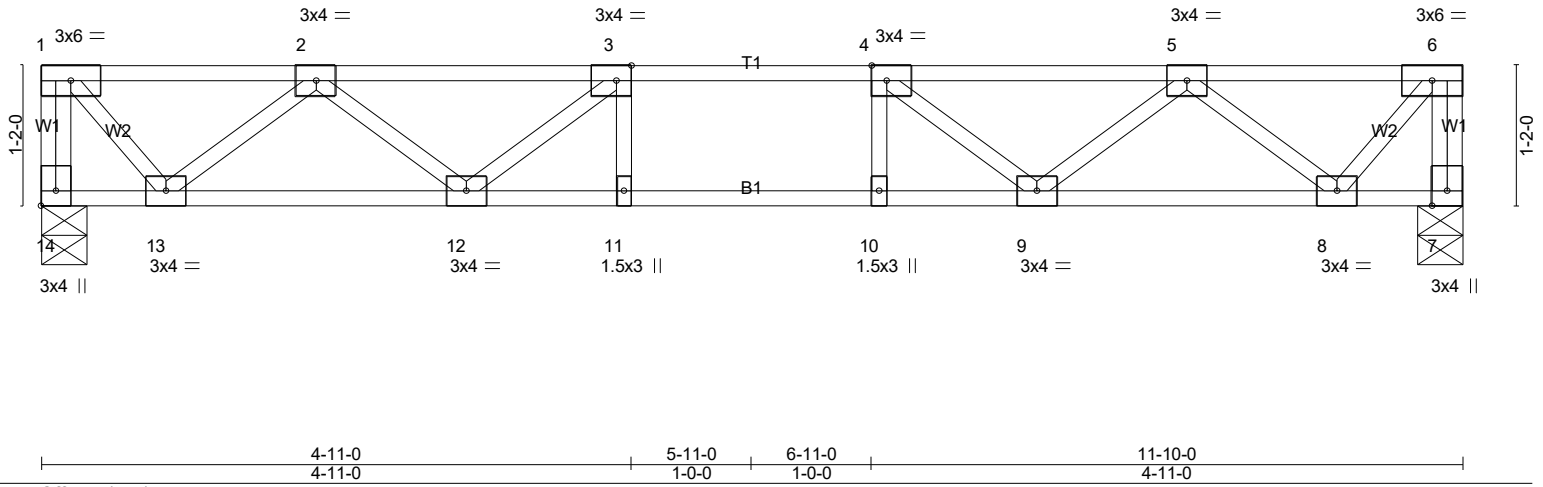


Plate Offsets (X,Y)-- [3:0-1-8,Edge], [4:0-1-8,Edge], [14:Edge,0-1-8]

| LOADING (psf) | SPACING- | CSI. | DEFL. | PLATES | GRIP |
|---------------|----------------------|-----------|------------------------------|---------------|-----------------|
| TCLL 40.0 | 1-7-3 | TC 0.21 | in (loc) l/defl L/d | MT20 | 244/190 |
| TCDL 10.0 | Plate Grip DOL 1.00 | BC 0.41 | Vert(LL) -0.06 9-10 >999 480 | | |
| BCLL 0.0 | Lumber DOL 1.00 | WB 0.28 | Vert(CT) -0.08 10 >999 360 | | |
| BCDL 5.0 | Rep Stress Incr YES | Matrix-SH | Horz(CT) 0.02 7 n/a n/a | | |
| | Code IRC2021/TPI2014 | | | Weight: 61 lb | FT = 20%F, 11%E |

| LUMBER- | BRACING- |
|-----------------------------|---|
| TOP CHORD 2x4 SP No.1(flat) | TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals. |
| BOT CHORD 2x4 SP No.1(flat) | BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing. |
| WEBS 2x4 SP No.3(flat) | |

REACTIONS. (lb/size) 14=509/0-4-8 (min. 0-1-8), 7=509/0-4-8 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-14=-508/0, 6-7=-508/0, 1-2=-389/0, 2-3=-1151/0, 3-4=-1396/0, 4-5=-1151/0, 5-6=-389/0
 BOT CHORD 12-13=0/899, 11-12=0/1396, 10-11=0/1396, 9-10=0/1396, 8-9=0/899
 WEBS 3-12=-385/0, 2-12=0/329, 2-13=-664/0, 1-13=0/589, 4-9=-385/0, 5-9=0/329, 5-8=-664/0, 6-8=0/589


- NOTES- (3-6)
- Unbalanced floor live loads have been considered for this design.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard




7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.



Scale = 1:19.8

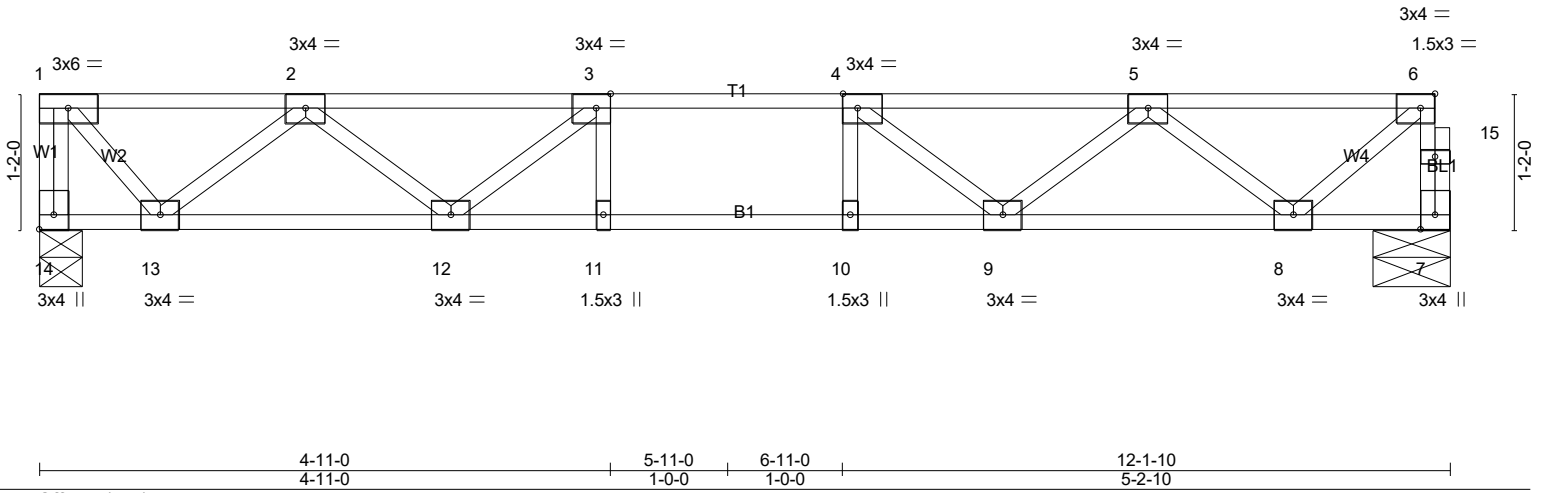

| | | | | | | | |
|---|----------------------|-------|-------------|----------------|----------|--------|-------------------------------|
| Plate Offsets (X,Y)-- [3:0-1-8,Edge], [4:0-1-8,Edge], [6:0-1-8,Edge], [14:Edge,0-1-8] | | | | | | | |
| LOADING (psf) | SPACING- | 1-7-3 | CSI. | DEFL. | in (loc) | l/defl | L/d |
| TCLL 40.0 | Plate Grip DOL 1.00 | | TC 0.25 | Vert(LL) -0.07 | 9-10 | >999 | 480 |
| TCDL 10.0 | Lumber DOL 1.00 | | BC 0.45 | Vert(CT) -0.09 | 9-10 | >999 | 360 |
| BCLL 0.0 | Rep Stress Incr YES | | WB 0.31 | Horz(CT) 0.02 | 7 | n/a | n/a |
| BCDL 5.0 | Code IRC2021/TPI2014 | | Matrix-SH | | | | |
| | | | | | | | PLATES MT20 |
| | | | | | | | GRIP 244/190 |
| | | | | | | | Weight: 62 lb FT = 20%F, 11%E |

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 14=523/0-4-8 (min. 0-1-8), 7=518/0-7-14 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-14=-522/0, 7-15=-514/0, 6-15=-514/0, 1-2=-400/0, 2-3=-1195/0, 3-4=-1469/0, 4-5=-1257/0, 5-6=-518/0
BOT CHORD 12-13=0/925, 11-12=0/1469, 10-11=0/1469, 9-10=0/1469, 8-9=0/1025
WEBS 3-12=-417/0, 2-12=0/352, 2-13=-682/0, 1-13=0/606, 4-9=-364/0, 5-9=0/314, 5-8=-661/0, 6-8=0/655


- NOTES-** (4-7)
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 3) CAUTION. Do not erect truss backwards.
 - 4) Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - 5) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - 6) Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - 7) SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAINING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard




7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.



Scale = 1:20.2

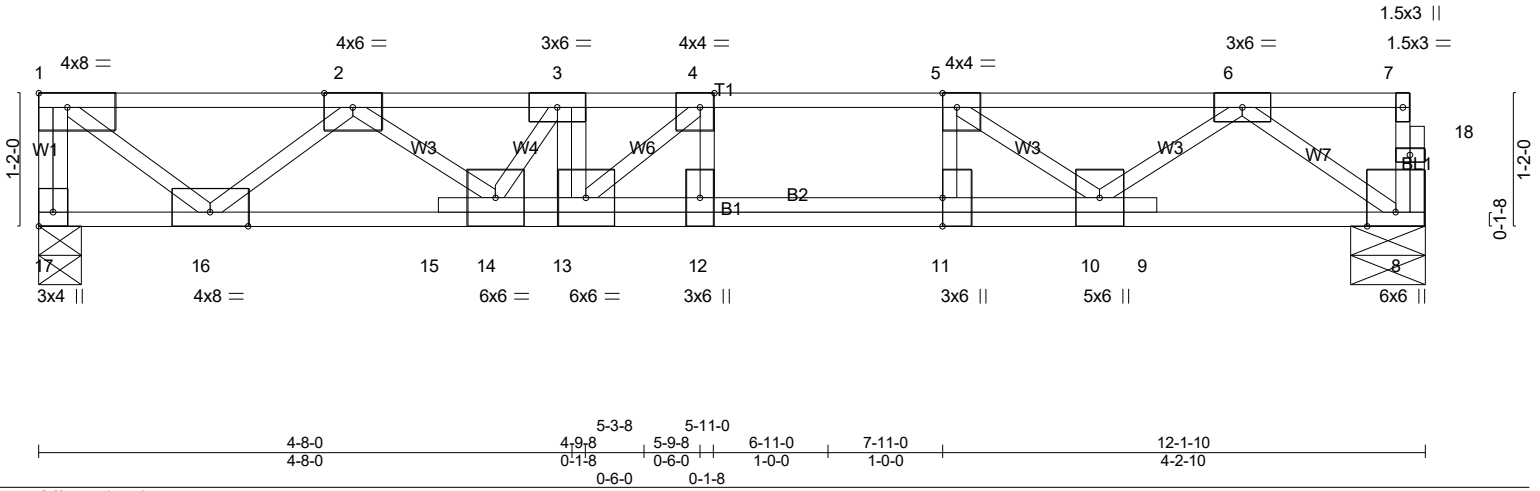

| | | | | | | | | | |
|---|----------------------|-------|-------------|--------------|----------|--------|------|---------------|-----------------|
| Plate Offsets (X,Y)-- [1:Edge,0-1-8], [4:0-1-8,Edge], [5:0-1-8,Edge], [11:0-3-0,0-0-0], [17:Edge,0-1-8] | | | | | | | | | |
| LOADING (psf) | SPACING- | 1-7-3 | CSI. | DEFL. | in (loc) | l/defl | L/d | PLATES | GRIP |
| TCLL 40.0 | Plate Grip DOL | 1.00 | TC 0.72 | Vert(LL) | -0.05 | 12 | >999 | MT20 | 244/190 |
| TCDL 10.0 | Lumber DOL | 1.00 | BC 0.70 | Vert(CT) | -0.21 | 12-13 | >679 | | |
| BCLL 0.0 | Rep Stress Incr | NO | WB 0.80 | Horz(CT) | 0.03 | 8 | n/a | | |
| BCDL 5.0 | Code IRC2021/TPI2014 | | Matrix-SH | | | | | | |
| | | | | | | | | Weight: 72 lb | FT = 20%F, 11%E |

| | |
|-----------------------------|---|
| LUMBER- | BRACING- |
| TOP CHORD 2x4 SP No.1(flat) | TOP CHORD Structural wood sheathing directly applied or 5-10-10 oc purlins, except end verticals. |
| BOT CHORD 2x4 SP SS(flat) | BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing. |
| WEBS 2x4 SP No.3(flat) | |

REACTIONS. (lb/size) 17=1116/0-4-8 (min. 0-1-8), 8=884/0-7-14 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-17=-1105/0, 1-2=-1343/0, 2-3=-3576/0, 3-4=-4267/0, 4-5=-3393/0, 5-6=-2039/0
 BOT CHORD 15-16=0/2562, 14-15=0/2544, 13-14=0/4267, 12-13=0/3393, 11-12=0/3393, 10-11=0/3393, 9-10=0/1156, 8-9=0/1164
 WEBS 4-12=-836/0, 5-11=0/801, 1-16=0/1685, 2-16=-1586/0, 2-14=0/1288, 3-14=-1229/0, 4-13=0/1290, 5-10=-1690/0, 6-10=0/1112, 6-8=-1424/0

- NOTES-** (5-8)
- Unbalanced floor live loads have been considered for this design.
 - Load case(s) 1, 2, 3, 4, 5, 6 has/have been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION. Do not erect truss backwards.
 - Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard
 1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
 Uniform Loads (plf)
 Vert: 8-17=-8, 1-7=-80
 Concentrated Loads (lb)
 Vert: 3=-960
 2) Dead: Lumber Increase=1.00, Plate Increase=1.00
 Uniform Loads (plf)
 Vert: 8-17=-8, 1-7=-80
 Concentrated Loads (lb)
 Vert: 3=-960



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | |
|-------------|-------|------------|-----|-----|--|
| Job | Truss | Truss Type | Qty | Ply | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC |
| 24-5967-F01 | F107A | FLOOR | 4 | 1 | Job Reference (optional) # 50513 |

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:50 2024 Page 2
ID:YrqHYj0sGK239HELXZ6g?zynRG-AMR2Jy_d1Zlwpok_YwmLLI2m0MWs1FNBaXZwxwyz1ff

LOAD CASE(S) Standard

- 3) 1st chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 8-17=-8, 1-5=-80, 5-7=-16
 - Concentrated Loads (lb)
 - Vert: 3=-960
- 4) 2nd chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 8-17=-8, 1-4=-16, 4-7=-80
 - Concentrated Loads (lb)
 - Vert: 3=-960
- 5) 3rd chase Dead: Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 8-17=-8, 1-5=-80, 5-7=-16
 - Concentrated Loads (lb)
 - Vert: 3=-960
- 6) 4th chase Dead: Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 8-17=-8, 1-4=-16, 4-7=-80
 - Concentrated Loads (lb)
 - Vert: 3=-960



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | | |
|--------------------|---------------|-------------------------------------|----------|----------|--|---------|
| Job 24-5967-F01 | Truss F108 | Truss Type Floor Supported Gable | Qty 1 | Ply 1 | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC | # 50513 |
|--------------------|---------------|-------------------------------------|----------|----------|--|---------|

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:51 2024 Page 1
 ID: iYrqHYj0sGK239HELXZ6g?zynRG-eZ?QWI?FotQnRylB6elatyb6Dm0vmujLoBJTTMyz1fk

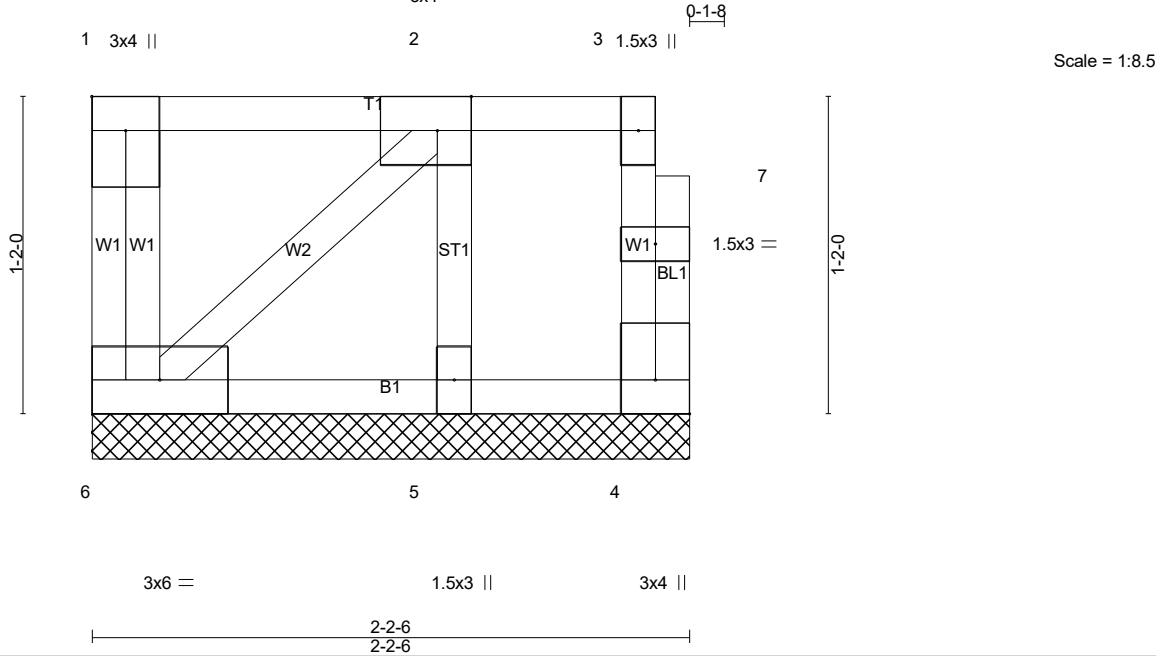


Plate Offsets (X,Y)-- [1:Edge,0-1-8], [2:0-1-8,Edge], [4:Edge,0-1-8]

| LOADING (psf) | SPACING- | CSI. | DEFL. | in | (loc) | l/defl | L/d | PLATES | GRIP |
|---------------|------------------------------|----------|----------|------|-------|--------|-----|---------------|-----------------|
| TCLL 40.0 | 2-0-0 Plate Grip DOL 1.00 | TC 0.05 | Vert(LL) | n/a | - | n/a | 999 | MT20 | 244/190 |
| TCDL 10.0 | Lumber DOL 1.00 | BC 0.01 | Vert(CT) | n/a | - | n/a | 999 | | |
| BCLL 0.0 | Rep Stress Incr YES | WB 0.03 | Horz(CT) | 0.00 | 4 | n/a | n/a | | |
| BCDL 5.0 | Code IRC2021/TPI2014 | Matrix-P | | | | | | | |
| | | | | | | | | Weight: 15 lb | FT = 20%F, 11%E |

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 2-2-6 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 4=16/2-2-6 (min. 0-1-8), 6=55/2-2-6 (min. 0-1-8), 5=136/2-2-6 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (6-9)
- Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION. Do not erect truss backwards.
 - Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - SEE BCSI-B3 SUMMARY SHEET - PERMANENT RESTRAINING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard




7/11/2024


Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | | |
|--------------------|---------------|---------------------|----------|----------|--|---------|
| Job 24-5967-F01 | Truss F109 | Truss Type FLOOR | Qty 1 | Ply 1 | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC | # 50513 |
|--------------------|---------------|---------------------|----------|----------|--|---------|

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:51 2024 Page 1
ID:YrqHYj0sGK239HELXZ6g?zynRG-eZ?QWI?FotQnRyIB6elatybXSmrFmi9LoBJTMyz1fk



Scale = 1:17.6

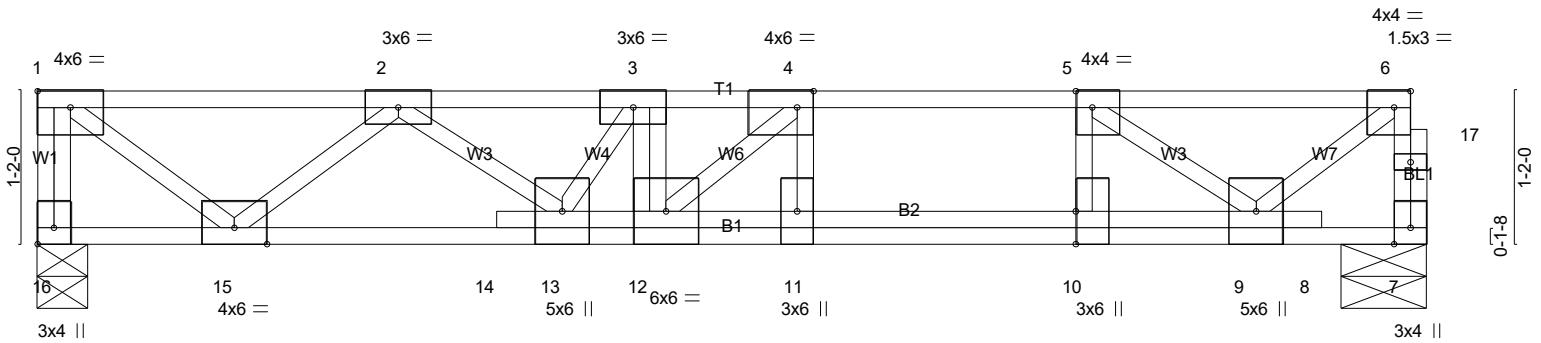

| | | | | | |
|-------|-------------|-------------|--------|--------|--------|
| 4-8-0 | 4-9-8 5-3-8 | 5-9-85-11-0 | 6-11-0 | 7-11-0 | 10-7-2 |
| 4-8-0 | 0-1-8 0-6-0 | 0-6-0 0-1-8 | 1-0-0 | 1-0-0 | 2-8-2 |

Plate Offsets (X,Y)-- [1:Edge,0-1-8], [4:0-1-8,Edge], [5:0-1-8,Edge], [6:0-1-8,Edge], [10:0-3-0,0-0-0], [16:Edge,0-1-8]

| LOADING (psf) | SPACING- | CSI. | DEFL. | in (loc) | l/defl | L/d | PLATES | GRIP |
|---------------|----------------------|-----------|----------|----------|--------|------|---------------|-----------------|
| TCLL 40.0 | 1-7-3 | TC 0.74 | Vert(LL) | -0.05 | 11-12 | >999 | MT20 | 244/190 |
| TCDL 10.0 | Plate Grip DOL 1.00 | BC 0.75 | Vert(CT) | -0.20 | 11-12 | >630 | | |
| BCLL 0.0 | Lumber DOL 1.00 | WB 0.77 | Horz(CT) | 0.02 | 7 | n/a | | |
| BCDL 5.0 | Rep Stress Incr NO | Matrix-SH | | | | | | |
| | Code IRC2021/TPI2014 | | | | | | Weight: 65 lb | FT = 20%F, 11%E |

LUMBER-

TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP SS(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 16=993/0-4-8 (min. 0-1-8), 7=871/0-7-14 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-16=-984/0, 7-17=-796/0, 6-17=-795/0, 1-2=-1183/0, 2-3=-3111/0, 3-4=-3735/0, 4-5=-2550/0, 5-6=-894/0
BOT CHORD 14-15=0/2253, 13-14=0/2238, 12-13=0/3735, 11-12=0/2550, 10-11=0/2550, 9-10=0/2550
WEBS 4-11=-1017/0, 5-10=0/979, 1-15=0/1484, 2-15=-1392/0, 2-13=0/1090, 3-13=-1109/0, 4-12=0/1615, 5-9=-2065/0, 6-9=0/1127

NOTES- (5-8)

- Unbalanced floor live loads have been considered for this design.
- Load case(s) 1, 2, 3, 4, 5, 6 has/have been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION. Do not erect truss backwards.
- Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
- Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
- Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
- SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard

- Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 7-16=-8, 1-6=-80
Concentrated Loads (lb)
Vert: 3=-960
- Dead: Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 7-16=-8, 1-6=-80
Concentrated Loads (lb)
Vert: 3=-960



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | |
|-------------|-------|------------|-----|-----|--|
| Job | Truss | Truss Type | Qty | Ply | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC |
| 24-5967-F01 | F109 | FLOOR | 1 | 1 | Job Reference (optional) # 50513 |

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:51 2024 Page 2
ID:YrqHYj0sGK239HELXZ6g?zynRG-eZ?QWI?FotQnRylB6elatybXSmrFmi9LoBJTTMyz1fk

LOAD CASE(S) Standard

- 3) 1st chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 7-16=-8, 1-5=-80, 5-6=-16
 - Concentrated Loads (lb)
 - Vert: 3=-960
- 4) 2nd chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 7-16=-8, 1-4=-16, 4-6=-80
 - Concentrated Loads (lb)
 - Vert: 3=-960
- 5) 3rd chase Dead: Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 7-16=-8, 1-5=-80, 5-6=-16
 - Concentrated Loads (lb)
 - Vert: 3=-960
- 6) 4th chase Dead: Lumber Increase=1.00, Plate Increase=1.00
 - Uniform Loads (plf)
 - Vert: 7-16=-8, 1-4=-16, 4-6=-80
 - Concentrated Loads (lb)
 - Vert: 3=-960



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | | |
|--------------------|---------------|---------------------|----------|----------|--|---------|
| Job 24-5967-F01 | Truss F110 | Truss Type Floor | Qty 2 | Ply 1 | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC | # 50513 |
|--------------------|---------------|---------------------|----------|----------|--|---------|

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:51 2024 Page 1
ID:1YrqHYj0sGK239HELXZ6g?zynRG-eZ?QWI?FotQnRylB6elatyb2SmvknmrJLoBJTTMyz1fk



Scale = 1:17.3

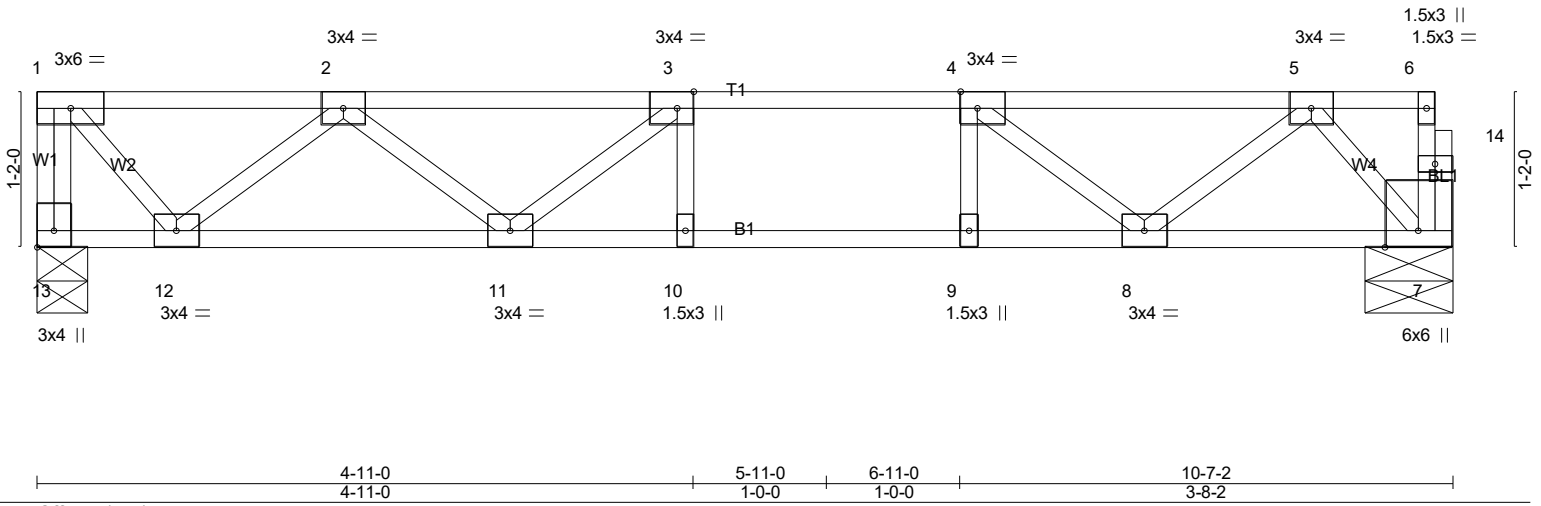


Plate Offsets (X,Y)-- [3:0-1-8,Edge], [4:0-1-8,Edge], [13:Edge,0-1-8]

| LOADING (psf) | SPACING- | CSI. | DEFL. | in (loc) | l/defl | L/d | PLATES | GRIP |
|---------------|----------------------|-----------|----------|----------|--------|------|---------------|-----------------|
| TCLL 40.0 | 1-7-3 | TC 0.29 | Vert(LL) | -0.07 | 10-11 | >999 | MT20 | 244/190 |
| TCDL 10.0 | Plate Grip DOL 1.00 | BC 0.46 | Vert(CT) | -0.09 | 10-11 | >999 | | |
| BCLL 0.0 | Lumber DOL 1.00 | WB 0.25 | Horz(CT) | 0.01 | 7 | n/a | | |
| BCDL 5.0 | Rep Stress Incr YES | Matrix-SH | | | | | | |
| | Code IRC2021/TPI2014 | | | | | | Weight: 54 lb | FT = 20%F, 11%E |

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)


BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 13=455/0-4-8 (min. 0-1-8), 7=450/0-7-14 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-13=-451/0, 1-2=-341/0, 2-3=-971/0, 3-4=-1096/0, 4-5=-724/0
BOT CHORD 11-12=0/794, 10-11=0/1096, 9-10=0/1096, 8-9=0/1096, 7-8=0/388
WEBS 3-11=-252/0, 2-12=-589/0, 1-12=0/517, 4-8=-476/0, 5-8=0/437, 5-7=-583/0

- NOTES-** (4-7)
- Unbalanced floor live loads have been considered for this design.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION. Do not erect truss backwards.
 - Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAINING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | |
|-------------|-------|------------|-----|-----|--|
| Job | Truss | Truss Type | Qty | Ply | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC |
| 24-5967-F01 | F111 | FLOOR | 1 | 1 | # 50513 |

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:52 2024 Page 1
 ID:YrqHYj0sGK239HELXZ6g?zynRG-6lYpje0tZBZe36tNgLppQA72NA7FV74U1r210pyz1fj



Scale = 1:20.2

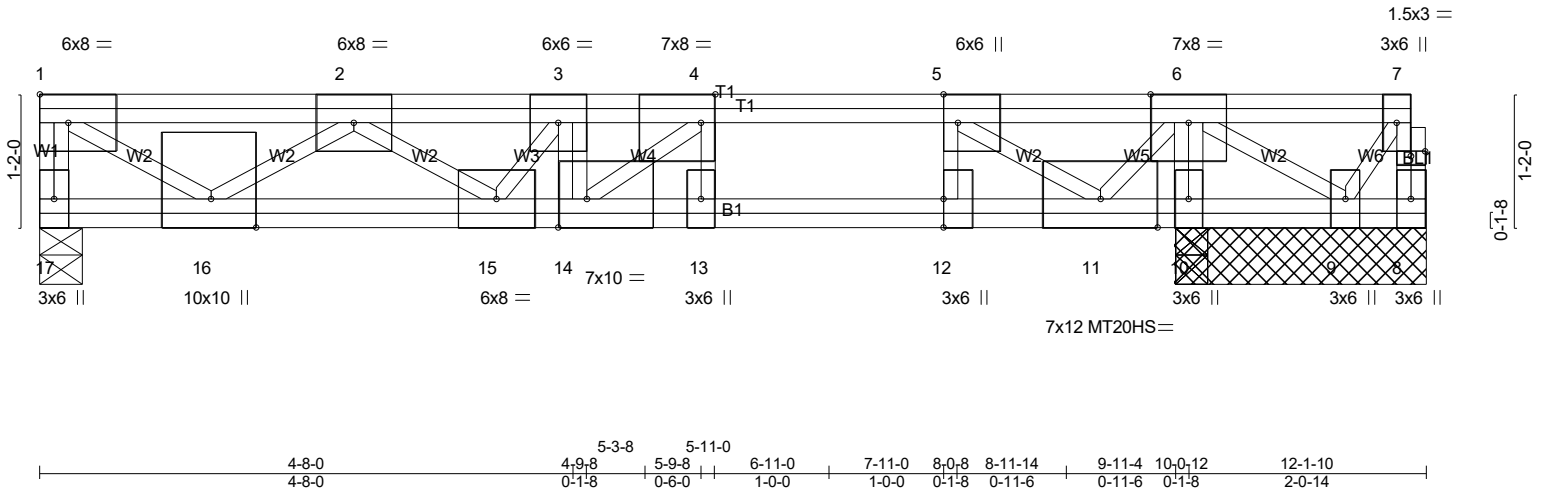


Plate Offsets (X,Y)-- [4:0-1-8,Edge], [5:0-3-0,Edge], [7:0-1-8,0-0-8], [12:0-3-0,0-0-0], [14:0-3-0,Edge], [16:0-3-0,Edge]

| LOADING (psf) | SPACING- | CSI. | DEFL. | in (loc) | l/defl | L/d | PLATES | GRIP |
|---------------|----------------------|-----------|----------------|----------|--------|-----|---------------|-----------------|
| TCLL 40.0 | 1-7-3 | TC 0.99 | Vert(LL) -0.03 | 13 | >999 | 480 | MT20 | 244/190 |
| TCDL 10.0 | Plate Grip DOL 1.00 | BC 0.96 | Vert(CT) -0.24 | 13-14 | >493 | 360 | MT20HS | 187/143 |
| BCLL 0.0 | Lumber DOL 1.00 | WB 0.92 | Horz(CT) 0.02 | 10 | n/a | n/a | | |
| BCDL 5.0 | Rep Stress Incr NO | Matrix-SH | | | | | | |
| | Code IRC2021/TPI2014 | | | | | | Weight: 98 lb | FT = 20%F, 11%E |

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP SS(flat)
 WEBS 2x4 SP No.3(flat) *Except*
 W2,W4: 2x4 SP No.2(flat)


BRACING-
 TOP CHORD Structural wood sheathing directly applied or 4-3-4 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 10-11,9-10.

REACTIONS. All bearings 2-2-6 except (jt=length) 17=0-4-8.
 (lb) - Max Uplift All uplift 100 lb or less at joint(s) 9
 Max Grav All reactions 250 lb or less at joint(s) 8 except 17=1514(LC 1), 10=1500(LC 1), 10=1500(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-17=-1498/0, 1-2=-2099/0, 2-3=-5576/0, 3-4=-6521/0, 4-5=-3968/0, 5-6=-975/0
 BOT CHORD 15-16=0/3976, 14-15=0/6521, 13-14=0/3968, 12-13=0/3968, 11-12=0/3968
 WEBS 3-14=-1268/0, 6-10=-1065/0, 4-13=-1184/0, 5-12=0/1221, 1-16=0/2523, 2-16=-2327/0,
 2-15=0/1985, 3-15=-1606/0, 4-14=0/3250, 5-11=-3681/0, 6-11=0/1574

- NOTES-** (7-10)
- Unbalanced floor live loads have been considered for this design.
 - All plates are MT20 plates unless otherwise indicated.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 9.
 - Load case(s) 1, 2, 3, 4, 5, 6 has/have been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.
 - Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAINING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard
 1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
 Uniform Loads (plf)
 Vert: 8-17=-8, 1-7=-80



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 National Design Standard for Metal Plate Connected Wood Truss Construction and BCSI 1-03 Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | |
|-------------|-------|------------|-----|-----|--|
| Job | Truss | Truss Type | Qty | Ply | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC |
| 24-5967-F01 | F111 | FLOOR | 1 | 1 | Job Reference (optional) # 50513 |

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:52 2024 Page 2
 ID:YrqHYj0sGK239HELXZ6g?zynRG-6lYpje0tZBZe36tNgLppQA72NA7FV74U1r210pyz1fj



LOAD CASE(S) Standard

- Concentrated Loads (lb)
Vert: 3=-2000
- 2) Dead: Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 8-17=-8, 1-7=-80
Concentrated Loads (lb)
Vert: 3=-2000
- 3) 1st chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 8-17=-8, 1-5=-80, 5-6=-16, 6-7=-80
Concentrated Loads (lb)
Vert: 3=-2000
- 4) 2nd chase Dead + Floor Live (unbalanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 8-17=-8, 1-4=-16, 4-7=-80
Concentrated Loads (lb)
Vert: 3=-2000
- 5) 3rd chase Dead: Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 8-17=-8, 1-5=-80, 5-6=-16, 6-7=-80
Concentrated Loads (lb)
Vert: 3=-2000
- 6) 4th chase Dead: Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 8-17=-8, 1-4=-16, 4-7=-80
Concentrated Loads (lb)
Vert: 3=-2000



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

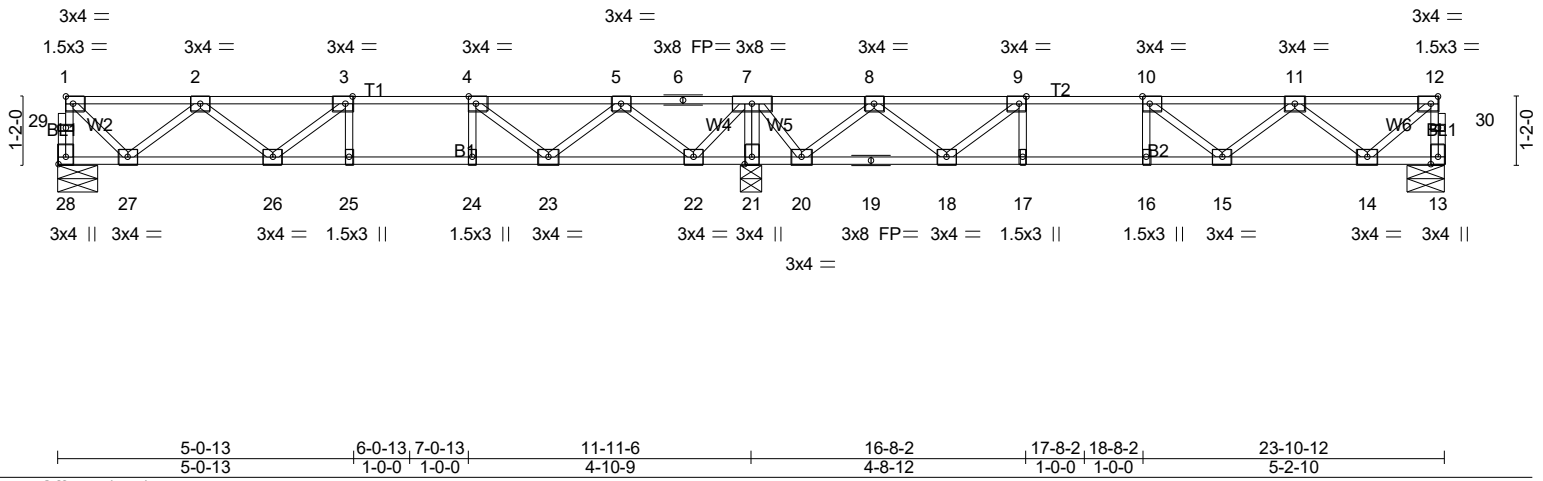

| LOADING (psf) | SPACING- | CSI. | DEFL. | PLATES | GRIP |
|---------------|----------------------|-----------|-------------------------------|--------|--------------------------------|
| TCLL 40.0 | 1-4-0 | TC 0.29 | in (loc) l/defl L/d | MT20 | 244/190 |
| TCDL 10.0 | Plate Grip DOL 1.00 | BC 0.45 | Vert(LL) -0.07 15-16 >999 480 | | |
| BCLL 0.0 | Lumber DOL 1.00 | WB 0.27 | Vert(CT) -0.09 15-16 >999 360 | | |
| BCDL 5.0 | Rep Stress Incr YES | Matrix-SH | Horz(CT) 0.02 13 n/a n/a | | |
| | Code IRC2021/TPI2014 | | | | Weight: 119 lb FT = 20%F, 11%E |

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 22-23,21-22,20-21,18-20.

REACTIONS. (lb/size) 28=373/0-7-14 (min. 0-1-8), 13=373/0-7-14 (min. 0-1-8), 21=980/0-4-8 (min. 0-1-8)
 Max Grav 28=394(LC 10), 13=395(LC 7), 21=980(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 28-29=-391/0, 1-29=-391/0, 13-30=-391/0, 12-30=-391/0, 1-2=-346/0, 2-3=-893/0,
 3-4=-1013/0, 4-5=-723/2, 5-6=-3/332, 6-7=-3/332, 7-8=0/386, 8-9=-700/27, 9-10=-1013/0,
 10-11=-916/0, 11-12=-390/0
 BOT CHORD 26-27=0/735, 25-26=0/1013, 24-25=0/1013, 23-24=0/1013, 22-23=-119/458, 21-22=-678/0,
 20-21=-681/0, 19-20=-151/420, 18-19=-151/420, 17-18=0/1013, 16-17=0/1013,
 15-16=0/1013, 14-15=0/774
 WEBS 7-21=-963/0, 2-27=-506/0, 1-27=0/465, 4-23=-450/0, 5-23=0/397, 5-22=-625/0,
 7-22=0/570, 9-18=-482/0, 8-18=0/418, 8-20=-630/0, 7-20=0/537, 11-14=-500/0,
 12-14=0/493

- NOTES-** (4-7)
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 3) CAUTION, Do not erect truss backwards.
 - 4) Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - 5) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - 6) Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - 7) SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAINING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 National Design Standard for Metal Plate Connected Wood Truss Construction and BCSI I-03 Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.


| | | | | | | |
|--------------------|---------------|-------------------------------------|----------|----------|--|---------|
| Job 24-5967-F01 | Truss F113 | Truss Type Floor Supported Gable | Qty 1 | Ply 1 | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC | # 50513 |
|--------------------|---------------|-------------------------------------|----------|----------|--|---------|

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:53 2024 Page 1
ID:YrqHYj0sGK239HELXZ6g?zynRG-ax6Bx_1VKUhVgGSZE2K2zNgScahMEo9eGVoaYFyz1f1

0-1-8

0-1-8

Scale = 1:39.7

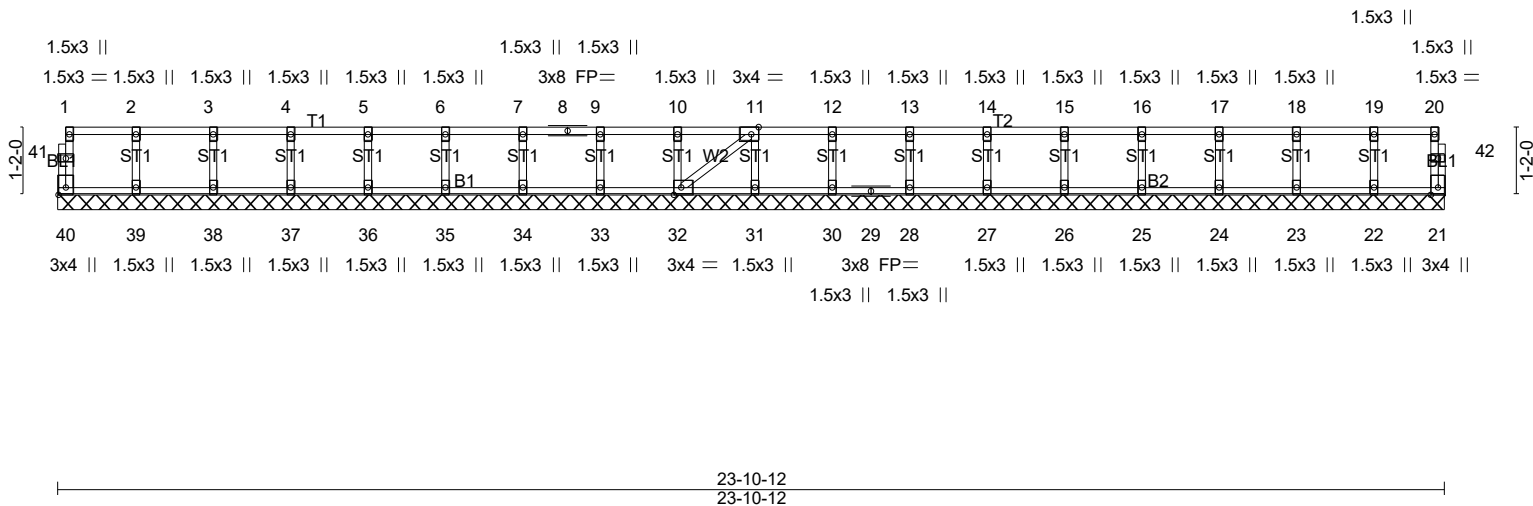

| | | | | | | | |
|---|----------------------|----------------------|--------------------------|---------------|-------------|--------------------------------|--|
| Plate Offsets (X,Y)-- [11:0-1-8,Edge], [32:0-1-8,Edge], [40:Edge,0-1-8] | | 23-10-12 23-10-12 | | | | | |
| LOADING (psf) | SPACING- | CSI. | DEFL. | PLATES | GRIP | | |
| TCLL 40.0 | 2-0-0 | TC 0.06 | in (loc) l/defl L/d | MT20 | 244/190 | | |
| TCDL 10.0 | Plate Grip DOL 1.00 | BC 0.01 | Vert(LL) n/a - n/a 999 | | | | |
| BCLL 0.0 | Lumber DOL 1.00 | WB 0.03 | Vert(CT) n/a - n/a 999 | | | | |
| BCDL 5.0 | Rep Stress Incr YES | Matrix-SH | Horz(CT) 0.00 21 n/a n/a | | | Weight: 101 lb FT = 20%F, 11%E | |
| | Code IRC2021/TPI2014 | | | | | | |

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 23-10-12.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 40, 21, 39, 38, 37, 36, 35, 34, 33, 32, 31, 30, 28, 27, 26, 25, 24, 23, 22

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (5-8)
- Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
 - Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
 - SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAINING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

| | | | | | | |
|--------------------|---------------|---------------------|-----------|----------|--|---------|
| Job 24-5967-F01 | Truss F114 | Truss Type Floor | Qty 24 | Ply 1 | LOT 0.0041 HONEYCUTT HILLS 188 SHELBY MEADOW LANE ANGIER, NC | # 50513 |
|--------------------|---------------|---------------------|-----------|----------|--|---------|

Run: 8.430 s Feb 12 2021 Print: 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Jul 11 20:57:53 2024 Page 1
ID:YrqHYj0sGK239HELXZ6g?zynRG-ax6Bx_1VKUhVgGSZE2K2zNgP4abrEkteGVoaYFzf1f

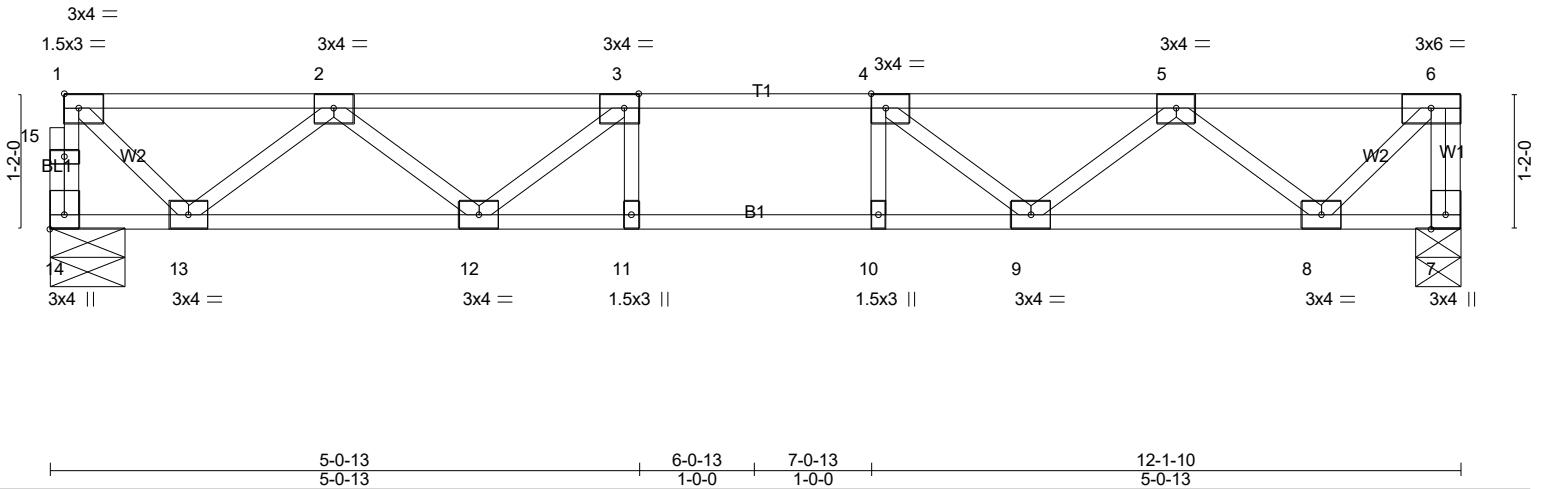



Plate Offsets (X,Y)-- [3:0-1-8,Edge], [4:0-1-8,Edge], [14:Edge,0-1-8]

| LOADING (psf) | SPACING- | CSI. | DEFL. | PLATES | GRIP |
|---------------|----------------------|-----------|-------------------------------|---------------|-----------------|
| TCLL 40.0 | 1-7-3 | TC 0.22 | in (loc) l/defl L/d | MT20 | 244/190 |
| TCDL 10.0 | Plate Grip DOL 1.00 | BC 0.42 | Vert(LL) -0.07 11-12 >999 480 | | |
| BCLL 0.0 | Lumber DOL 1.00 | WB 0.31 | Vert(CT) -0.09 11 >999 360 | | |
| BCDL 5.0 | Rep Stress Incr YES | Matrix-SH | Horz(CT) 0.02 7 n/a n/a | | |
| | Code IRC2021/TPI2014 | | | Weight: 62 lb | FT = 20%F, 11%E |

LUMBER-

TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 14=518/0-7-14 (min. 0-1-8), 7=523/0-4-8 (min. 0-1-8)


FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 14-15=-516/0, 1-15=-515/0, 6-7=-520/0, 1-2=-461/0, 2-3=-1227/0, 3-4=-1470/0, 4-5=-1227/0, 5-6=-459/0
BOT CHORD 12-13=0/975, 11-12=0/1470, 10-11=0/1470, 9-10=0/1470, 8-9=0/977
WEBS 3-12=-390/0, 2-12=0/331, 2-13=-670/0, 1-13=0/619, 4-9=-390/0, 5-9=0/331, 5-8=-674/0, 6-8=0/641

NOTES- (4-7)

- Unbalanced floor live loads have been considered for this design.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION. Do not erect truss backwards.
- Graphical bracing representation does not depict the size, type or the orientation of the brace on the member. Symbol only indicates that the member must be braced.
- Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.
- Web bracing shown is for lateral support of individual web members only. Refer to BCSI - Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for additional bracing guidelines, including diagonal bracing.
- SEE BCSI-B3 SUMMARY SHEET- PERMANENT RESTRAINING/BRACING OF CHORDS & WEB MEMBERS FOR RECOMMENDED MINIMUM BRACING REQUIREMENTS OF TOP CHORD, BOTTOM CHORD, AND WEB PLANES. IN ADDITION TO THESE MINIMUM GUIDELINES, ALWAYS CONSULT THE PROJECT ARCHITECT OR ENGINEER FOR ADDITIONAL BRACING CONSIDERATIONS.

LOAD CASE(S) Standard



7/11/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.