SOIL & ENVIRONMENTAL SCIENTISTS

P.O. Box 400, Lillington, NC 27546-0400 Phone (910) 893-8743 / Fax (910) 893-3594 www.halowensoil.com

Site Address	:	1262 W. Blackman F	₹d		
County:	Harne	tt	_PIN	1504-29-440)7
LHD Refere	nce:	SFD2408-0017	_HOA Permi	t #:HOA	1-AOWE-2409-09
Applicant:					
Name	e:	BVA Builders, Inc			
Addr	ess:	1300 Benson Rd, St	110, Garner, N	C 27529	
ı,	NO T	F. BYUW	y 194 0-	<u>,</u> acknowled	ge receipt of the Licensed
Soil Scientis	t Report	which includes:			
• Signo	ed and se	ealed copy of the AOW	VE's report that	includes the i	nformation in G.S. 130A-
336.2	2(k)				
• Auth	orization	n to Operate			
• Oper	ation an	d Management Progra	m		
I accept the	septic s	system installation and	d understand the	hat I will be i	responsible for continued
adherence to	the Ope	erations and Managem	ent program es	tablished by th	ne AOWE.
Signature	\ \ .	Bum			8/5/25 Date

SOIL & ENVIRONMENTAL SCIENTISTS

P.O. Box 400, Lillington, NC 27546-0400 Phone (910) 893-8743 / Fax (910) 893-3594 www.halowensoil.com

4 August 2025

BVA Builders, Inc. 1300 Benson Rd, Suite 110 Garner, NC 27529

Reference: LSS Report for Authorization to Operate (ATO)

1262 W. Blackman Rd; Lot 2 LHD # SFD2408-0017 AOWE # HOA-AOWE-2409-09

Dear BVA Builders, Inc.,

This LSS Report is being provided pursuant to and meets the requirements of G.S. 130A-336. This report is based on information provided by the property owner or their representative. Hal Owen & Associates, Inc. is not responsible for false or misleading information that may have been provided to us in pursuit of this permit, nor for concealed conditions on the property. Hal Owen & Associates Inc. does not warrant that the septic system will continue to function satisfactorily in the future.

The septic system for the above referenced property has been installed and was inspected by Hal Owen & Associates staff on 28 July 2025. The system has been installed in compliance with applicable NC General Statutes, Rules for Sewage Treatment and Disposal, and all conditions of the AOWE Permit.

Enclosed with this report are the Septic System Final Inspection Report, As-Built map (Figure 1), and Operation and Management Program.

You will need to sign a document confirming receipt of this report and acceptance of the installed system (pg 1) and submit this report to the Local Health Department (LHD). The LHD shall issue a certificate of occupancy upon receipt of a complete ATO.

I appreciate the opportunity to provide this service. If you have any questions or need additional information, please contact me at your convenience.

SOIL SCIENT ON THE STATE OF MORTH CR

Continued Name of The Name of

Sincerely,

Hal Owen

Licensed Soil Scientist

Authorized Onsite Wastewater Evaluator

1 Awar

Contacts

APPLICANT

Applicant Name	BVA Builders, Inc.
Mailing Address	1300 Benson Rd, Suite 110, Garner, NC 27529
Telephone Number	919-520-2181
E-mail Address	aford@vfgrealty.com

SOIL SCIENTIST

Company Name	Hal Owen & Associates, Inc.	
Mailing Address	PO Box 400, Lillington, NC 27546	
Telephone Number	910-893-8743 Fax: 910-893-3594	
E-mail Address	hal@halowensoil.com	
Licensed Soil Scientist	Hal Owen, LSS#1102 and AOWE# 10036E	
System Designer	Jocelyn Proulx	
System Inspector	Jocelyn Proulx #9943I	

INSTALLER

Company Name	Pro Septic Tanks LLC
Mailing Address	136 Sugartree Ln, Mount Olive, NC 28365
Telephone Number	(919) 273-1784
E-mail Address	proseptictanks@gmail.com
Installer & Certification #	Litzy Herrera #11274

LOCAL HEALTH DEPARTMENT

Agency Name	Harnett County Health Department Environmental Health Division	
Mailing Address	307 W Cornelius Harnett Blvd, Lillington, NC 27546	
Telephone Number	(910) 893-7547	
LHD Application #	SFD2408-0017	

Septic System Final Inspection Report

Property Identifiers

County	Harnett	PIN	1504-29-4407
Size (Acre)	0.90	County PID	
Site Address	1262 W. Black	cman Rd	
S/D Name and Lot#	Lot 2		

System Description

Facility Type	Single Family Residence
Basement	No
Basis of flow	3 bedrooms
Wastewater Strength	Domestic
Design Wastewater Flow	360 gpd
Water Supply	Public
.0403 Eng Low Flow	No
Soil LTAR	0.35
System Type	IIIbg

Installation

nanon	
Date	28 July 2025
System Inspector	Jocelyn Proulx, #9943I
Installer	Litzy Herrera #11274

Septic Tank:

Talik.	
Volume (gallons)	1000
Brand and Tank ID#	MCP STB-814
Date of Manufacture	NA
Certified watertight	NA
Distance to Structure	5'
Elevation of tank inlet	4' 9 1/2"
Elevation of tank outlet	4' 11 ½"

Effluent Filter:

Make and Model	Polylok PL-68	

Pump Tank:

rain.	
Volume (gallons)	1000
Brand and Tank ID#	MCP PT-53
Date of Manufacture	NA
Certified watertight	NA
Elevation of tank inlet	5' 1 1/2"
Elevation of tank outlet	5' 4"

Pump:

Make and Model	Liberty LE51M
Pump Sys- Elevation Head	6.10
Pump Sys- Friction Loss	1.13
Pump Sys- Design Head	2.0
Pump Sys- TDH	9.23
GPM (actual)	27.37

Control Panel:

tti OI I billion.	
Manufacturer	APS Simplex APS120-AB
Manufacturer	

Distribution:

Supply Line Length to Distribution	15'
Supply Line Diameter	2"
Distribution Device:	Pressure Manifold
Number of outlets (laterals)	3


Drainfield:

Type	Quick4 Standard Chamber
Distance to Structure	36'
Distance to Well	NA

Trench Deptl	1	12"	Trench width	36"
Trench Spaci		9'	Aggregate	chamber
	Lenoth (ft)	Start	Middle	End .
Line 1	42	4'	4'	4' 1/4"
Line 2	74	3' 10"	3' 10"	3' 10 1/4"
Line 3	74	4' 1"	4' 1"	4' 1 1/4"
	70	4' 1 1/2"	4' 1 ½"	4' 1 3/4''
Total	260			

All elevations are given as relative grade rod reading.

Notes:

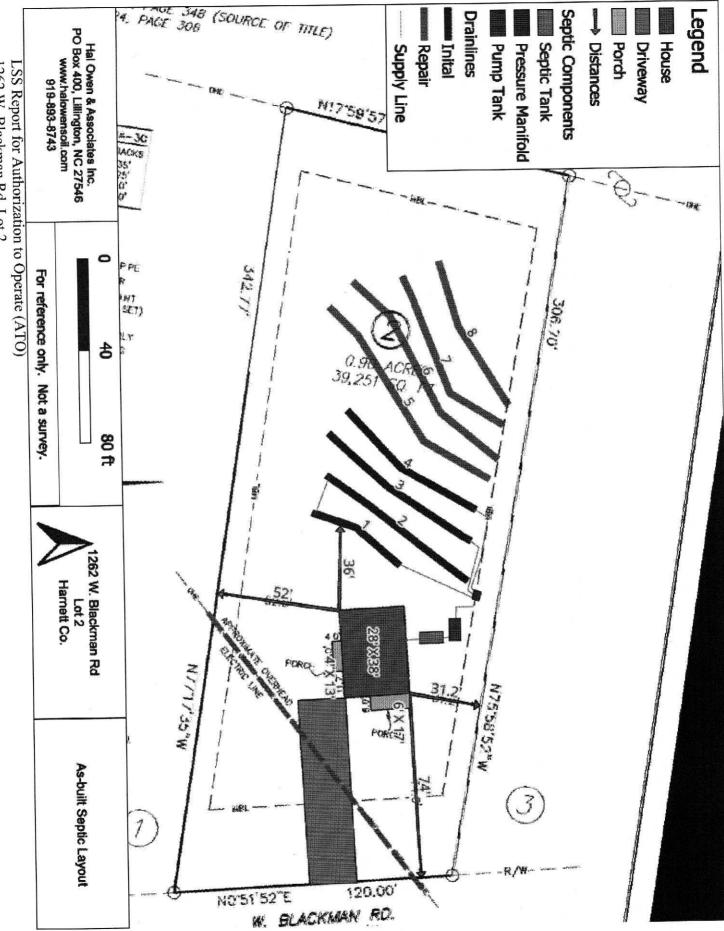



1262 W. Blackman Rd, Lot 2 AOWE# HOA-AOWE-2409-09

4 August 2025


Installation pictures




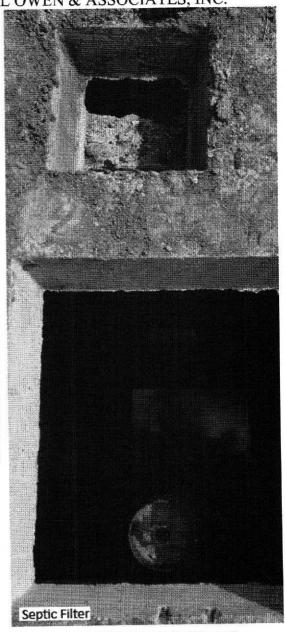


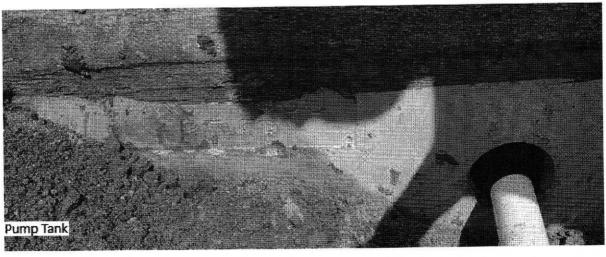

LSS Report for Authorization to Operate (ATO)
1262 W. Blackman Rd, Lot 2
AOWE# HOA-AOWE-2409-09
4 August 2025

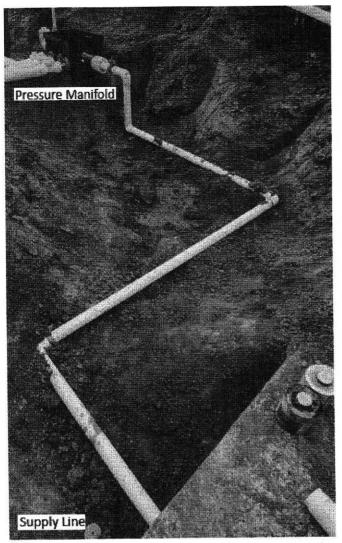


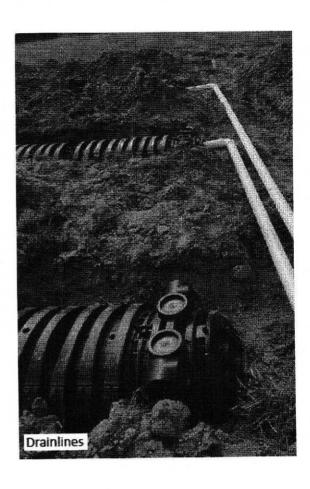


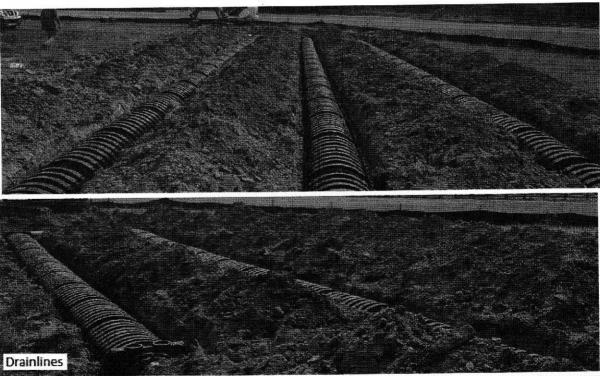

LSS Report for Authorization to Operate (ATO)
1262 W. Blackman Rd, Lot 2
AOWE# HOA-AOWE-2409-09
4 August 2025



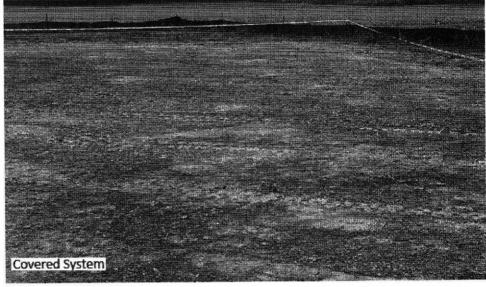

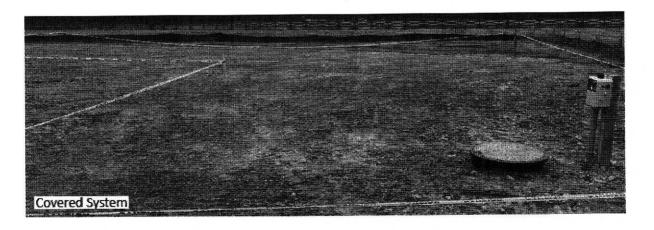

Operation and Management Program

In accordance with G.S. § 130A-336.2, the owner is responsible for continued adherence to the operations and management program. Septic systems safely treat and dispose of wastewaters produced in the bathroom, kitchen, and laundry. These wastewaters may contain disease-causing germs and pollutants that must be treated to protect human health and the environment. Septic systems must be properly used, operated, and maintained by the homeowner to assure the long-term performance of the system.

PERMIT CO	IUNC	TIONS:
-----------	------	--------

- I. Performance: System shall perform in accordance with Section .1300.
- II. Monitoring: As required by Section .1300.
- III. Maintenance: Ground absorption sewage treatment and disposal systems shall be checked, and the contents of the septic tank removed, periodically from all compartments, to ensure proper operation of the system. The contents shall be pumped whenever the solids level is found to be more than 1/3 of the liquid depth in any compartment.

	Subsurface system operator required? Yes	No_	X	
	If yes, see attached sheet for additional operation	on condition	ns, main	itenance and reporting
V.	Operation:			

TABLE XXXII. Management responsibilities based on wastewater system classification type and description.

System Classification Type and Description	LHD Compliance Inspection Frequency	Management Entity	Management Entity Minimum Maintenance Inspection Frequency NA 5 years	
IIIb-Wastewater system with a single pump or siphon	5 years NA	Owner or certified operator		
IIIg- Other non- conventional systems	N/A	Owner	N/A	

KNOW WHERE YOUR SEPTIC SYSTEM IS LOCATED

Your property has an onsite subsurface sewage waste disposal system. Familiarize yourself with the location of the system including the tanks, distribution devices, and disposal fields (including repair area). These areas shall be protected from excavation, building additions, outbuildings, pool construction, and soil disturbing activities. Prohibit vehicular traffic over the ground absorption field.

DAY-TO-DAY MANAGEMENT

Don't use too much water.

- The drainfield does not have unlimited capacity.
- Typical daily water use is 50 gallons per person.
- The soil drainfield usually has a maximum daily design capacity of 120 gallons per bedroom, even for short periods of time.
- Overloads can occur seasonally, daily, or on the weekend.
- ♦ Water conservation will extend the life of your system.
- Repair dripping faucets and toilets.

Limit disposal to sewage.

- ♦ Don't use your septic tank as a trash can for cigarette butts, tissues, sanitary napkins, cotton swabs, cat box litter, coffee grounds, or disposable diapers.
- Restrict the use of your garbage disposal. These add quite a lot of extra solids.
- Don't pour grease or cooking oil down the drain.
- Don't poison your system with harmful chemicals such as solvents, oils, paints, thinners, discarded medications, disinfectants, pesticides, poisons, and other substances.
- Save money. Commercial septic tank additives are usually not necessary.

Protect the system from physical damage (site maintenance).

- Keep the soil over the drainfield covered with vegetation to prevent soil erosion.
- Don't drive vehicles over the system.
- Avoid construction over the system and repair area.
- Don't cover the tank or drainfield with asphalt or concrete.
- Do not install irrigation systems over your drainfield as these could damage the system and/or hydraulically overload the soils.

Dispose of all wastewater in an approved system.

- Don't put in a separate pipe to carry wash waters to a side ditch or the woods. This is illegal.
- Don't connect pipes from air conditioners or ice makers to the septic system.

PERIODIC MAINTENANCE AND REPAIR

Home and yard (site maintenance):

- Protect and maintain the site of your septic tank and drainfield.
- In the drainfield area, cut down and remove trees that like wet conditions. This includes willows, elms, sweetgums, and some maples.
- ♦ Landscape the yard to divert surface waters away from the tank and drainfield. Eliminate depressional areas within the drainfield.
- Be sure that the water from the roof, gutters, and foundation drains does not flow over the system.
- Maintain drainage ditches, subsurface tiles, and drainage outlets so that water can flow freely from them.

Septic tank:

- Ensure tank risers remain accessible for measuring and pumping solids as well as cleaning the effluent filter.
- ♦ Measure how quickly sludge and scum accumulate in the tank. Pump septage when solids occupy 1/3 to 1/4 of the liquid capacity of the tank (frequency 1 to 3 years).
- ◆ Don't wait until your drainfield fails to have your tank pumped. By then, the drainfield may be ruined. With septic systems, an ounce of prevention is worth a ton of cure!

Table 1. Estimated septic tank inspection and pumping frequency (in years). Tank Size (gallons)

		Number of	People Using	the System	
Tank Size (gallons)	1	2	4	6	8
900	11	5	2	1	<1
1000	12	6	3	2	1
1250	16	8	3	2	1
1500	19	9	4	3	2

SIGNS OF POSSIBLE SEPTIC SYSTEM PROBLEMS

- Sewage backing up into your toilets, tubs, or sinks.
- Slowly draining fixtures, particularly after it has rained.
- ♦ The smell of raw sewage accompanied by soggy soil or sewage discharged over the ground or in nearby ditches or woods.
- ♦ Note: pump systems sewage may come to the ground surface when the pump is turned on and then disappear after the pump turns off. This is still a system failure and must be repaired.
- ♦ An alarm flashing (red light) or beeping in the house or in the yard indicating a pump is not working properly or that the water level in a pump tank is too high and close to failure.
- Don't attempt to repair a failing system yourself. Get a repair permit and hire an experienced contractor.

REGULATIONS AND PRECAUTIONS:

 Sewage contains germs that can cause diseases. Never enter a septic tank. Toxic and explosive gases in the tank present a hazard. Old tanks may collapse. Electrical controls present a shock and spark hazard. Secure the septic tank lid so that children cannot open it.

For more information about septic systems, contact your county Extension agent or local health department. https://content.ces.ncsu.edu/septic-system-owners-guide

Experience and study have shown that pressure manifold systems require routine maintenance in order to function properly. Items 1, 4, and 6 are also recommended for conventional septic systems. The maintenance schedule frequency is as follows:

System Component	Frequency	Maintenance
Septic Tank	6-12 months	Check riser condition (must be accessible from ground surface), excess in/exfiltration, entry of water at riser, and solids accumulation. Check and clean septic tank filter. Pump septage when 1-3 to 1/4 of
2	1-3 years	the liquid capacity of the tank is occupied by solids.
Pump or Dosing Tank	6-12 months	Check riser conditions (must be accessible from ground surface), excess in/exfiltration, entry of water at riser, and solids accumulation. Pump sludge accumulation as required and when septic tank is pumped. Check pump(s), controls, floats, electrical connections, and alarm for proper operation. Wash (hose) sludge accumulation from pump
	1	housing.
Supply Lines (Manifold)	6-12 months	Check for settling, pipe exposure and leakage
Ground Absorption Field	1-4 weeks	Maintain vegetative cover (mow grass and remove weeds and brush). Check for settling, crosion
	6-12 months	and surfacing effluent. Check site drainage, eliminate low or settled areas and divert surface or shallow groundwater movement around
Pressure Manifold	6-12 months	fields. Flush sludge from pressure manifold (any discharge sludge and effluent is to be treated with a chlorine solution). Check and reset pressure head.
General	At all times	Prohibit vehicular or equipment traffic on ground absorption field. Prohibit tillage (gardening) or other soil disturbance over septic field. Practice water conservation to reduce wastewater load on system. Do not permit entry of grease and non-domestic waste to system. Use of garbage disposal is prohibited. Addition of chemical or biological additives has not been demonstrated to be necessary to maintain proper system function. Prevention of root intervention on lateral lines and trenches may be necessary on certain sites. Surface and groundwater diversion structures

PREVENTIVE MAINTENANCE RECORD

Your Septic System Pumper		
Name:		
Address:		
	Email:	
Date System Installed:		
Date Work Done	Firm	Cost
	v	
1		
		<i>a</i> .
-		



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) 1/17/2025

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed.

ODUCER			INAME.	a Sanchez Cruz	TEAU	
owells Insurance			PHONE (A/C, No, Ext): (91	0) 590-2800	(A/C, No):	9105903600
.O. Box 376			ADDRESS: bcruz	a)powellsinsurance	e.com	
				INSURER(S) AFFOI		NAIC #
Clinton NC 28329		INSURER A: OHI			24082	
NSURED			INSURER B : MID	SOUTH INSURA	ANCE CO	55320
to Septic Tanks LLC			INSURER C:			
36 Sugartree Ln			INSURER D :			
•			INSURER E :			
fount Olive		NC 28365-5425	INSURER F:			
OVERAGES CER	TIFICATE	NUMBER:			REVISION NUMBER:	(====ion
THIS IS TO CERTIFY THAT THE POLICIES OF INDICATED. NOTWITHSTANDING ANY REQUESTIFICATE MAY BE ISSUED OR MAY PER EXCLUSIONS AND CONDITIONS OF SUCH P	JIREMENT TAIN, THE OLICIES. I	F, TERM OR CONDITION OF EINSURANCE AFFORDED B' LIMITS SHOWN MAY HAVE E	THE POLICIES DE EEN REDUCED BY	SCRIBED HEREII PAID CLAIMS.	N IS SUBJECT TO ALL THE T	HOLL LING
R TYPE OF INSURANCE	INSD WVI	POLICY NUMBER	(MM/DD/YY	FF POLICY EXP (MM/DD/YYYY)	LIMIT	
COMMERCIAL GENERAL LIABILITY					EACH OCCURRENCE	\$ 1,000
CLAIMS-MADE X OCCUR					PREMISES (Ea occurrence)	\$ 300
					MED EXP (Any one person)	\$ 1:
		BKS68225495	09/13/20	09/13/2025	PERSONAL & ADV INJURY	\$ 1,00
GEN'L AGGREGATE LIMIT APPLIES PER:			1		GENERAL AGGREGATE	\$ 2,00
POLICY PRO- JECT LOC					PRODUCTS - COMP/OP AGG	\$ 2,00
OTHER:					COMBINED SINGLE LIMIT	\$
AUTOMOBILE LIABILITY					(Ea accident)	\$
ANY AUTO					BODILY INJURY (Per person)	\$
OWNED SCHEDULED AUTOS					BODILY INJURY (Per accident) PROPERTY DAMAGE	
HIRED NON-OWNED AUTOS ONLY					(Per accident)	\$
UMBRELLA LIAB OCCUR				£	EACH OCCURRENCE	\$
EXCESS LIAB CLAIMS-MADE					AGGREGATE	\$
DED RETENTION\$					IPER I IOTH-	\$
WORKERS COMPENSATION AND EMPLOYERS' LIABILITY Y/N					PER OTH- STATUTE ER	s 50
ANY PROPRIETOR/PARTNER/EXECUTIVE	N/A	WC 08263 2024	09/19/2	024 09/19/2025	E.L. EACH ACCIDENT	51
(Mandatory in NH)	1	WC 00203 2021		7/2021	E.L. DISEASE - EA EMPLOYEE	s 50
if yes, describe under DESCRIPTION OF OPERATIONS below					E.L. DISEASE - POLICY LIMIT	\$ 30
×						
			1			
SACRIFICAL OF ORERATIONS / LOCATIONS / VEH	CLES (ACC	ORD 101 Additional Remarks Sci	edule, may be attache	d if more space is re	equired)	
ESCRIPTION OF OPERATIONS / LOCATIONS / VEHI	CLES (ACC	ORD 101, Additional Remarks Sci	edule, may be attache	d if more space is re	equired)	
CERTIFICATE HOLDER			CANCELLATI	ON		
Hal Owen & Associates Inc.		SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.				
Hal Owen & Associates Inc.			ACCORDANG	E WITH THE POL	ICY PROVISIONS.	
Hal Owen & Associates Inc. PO BOX 400			ACCORDANG	E WITH THE POL	ICY PROVISIONS.	